






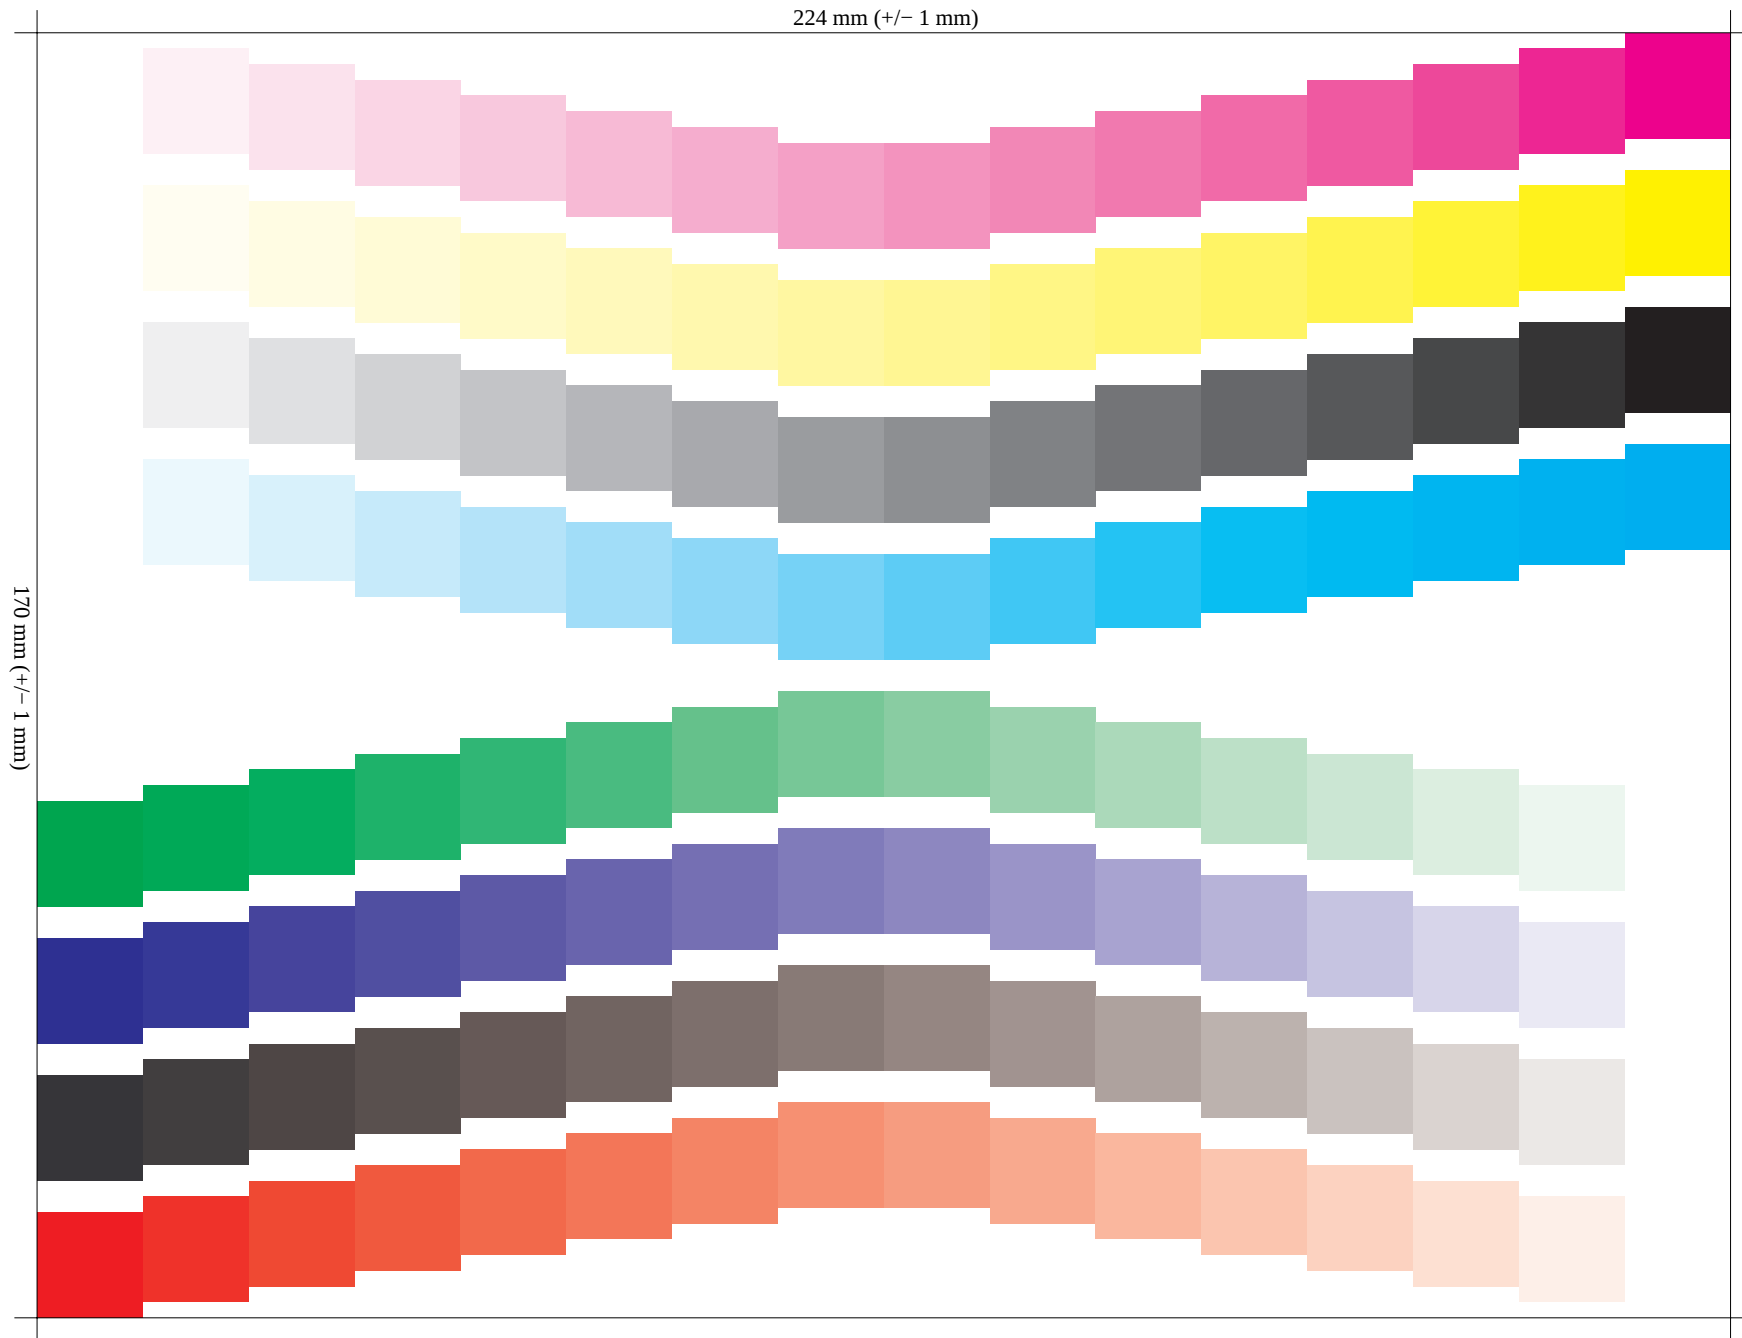


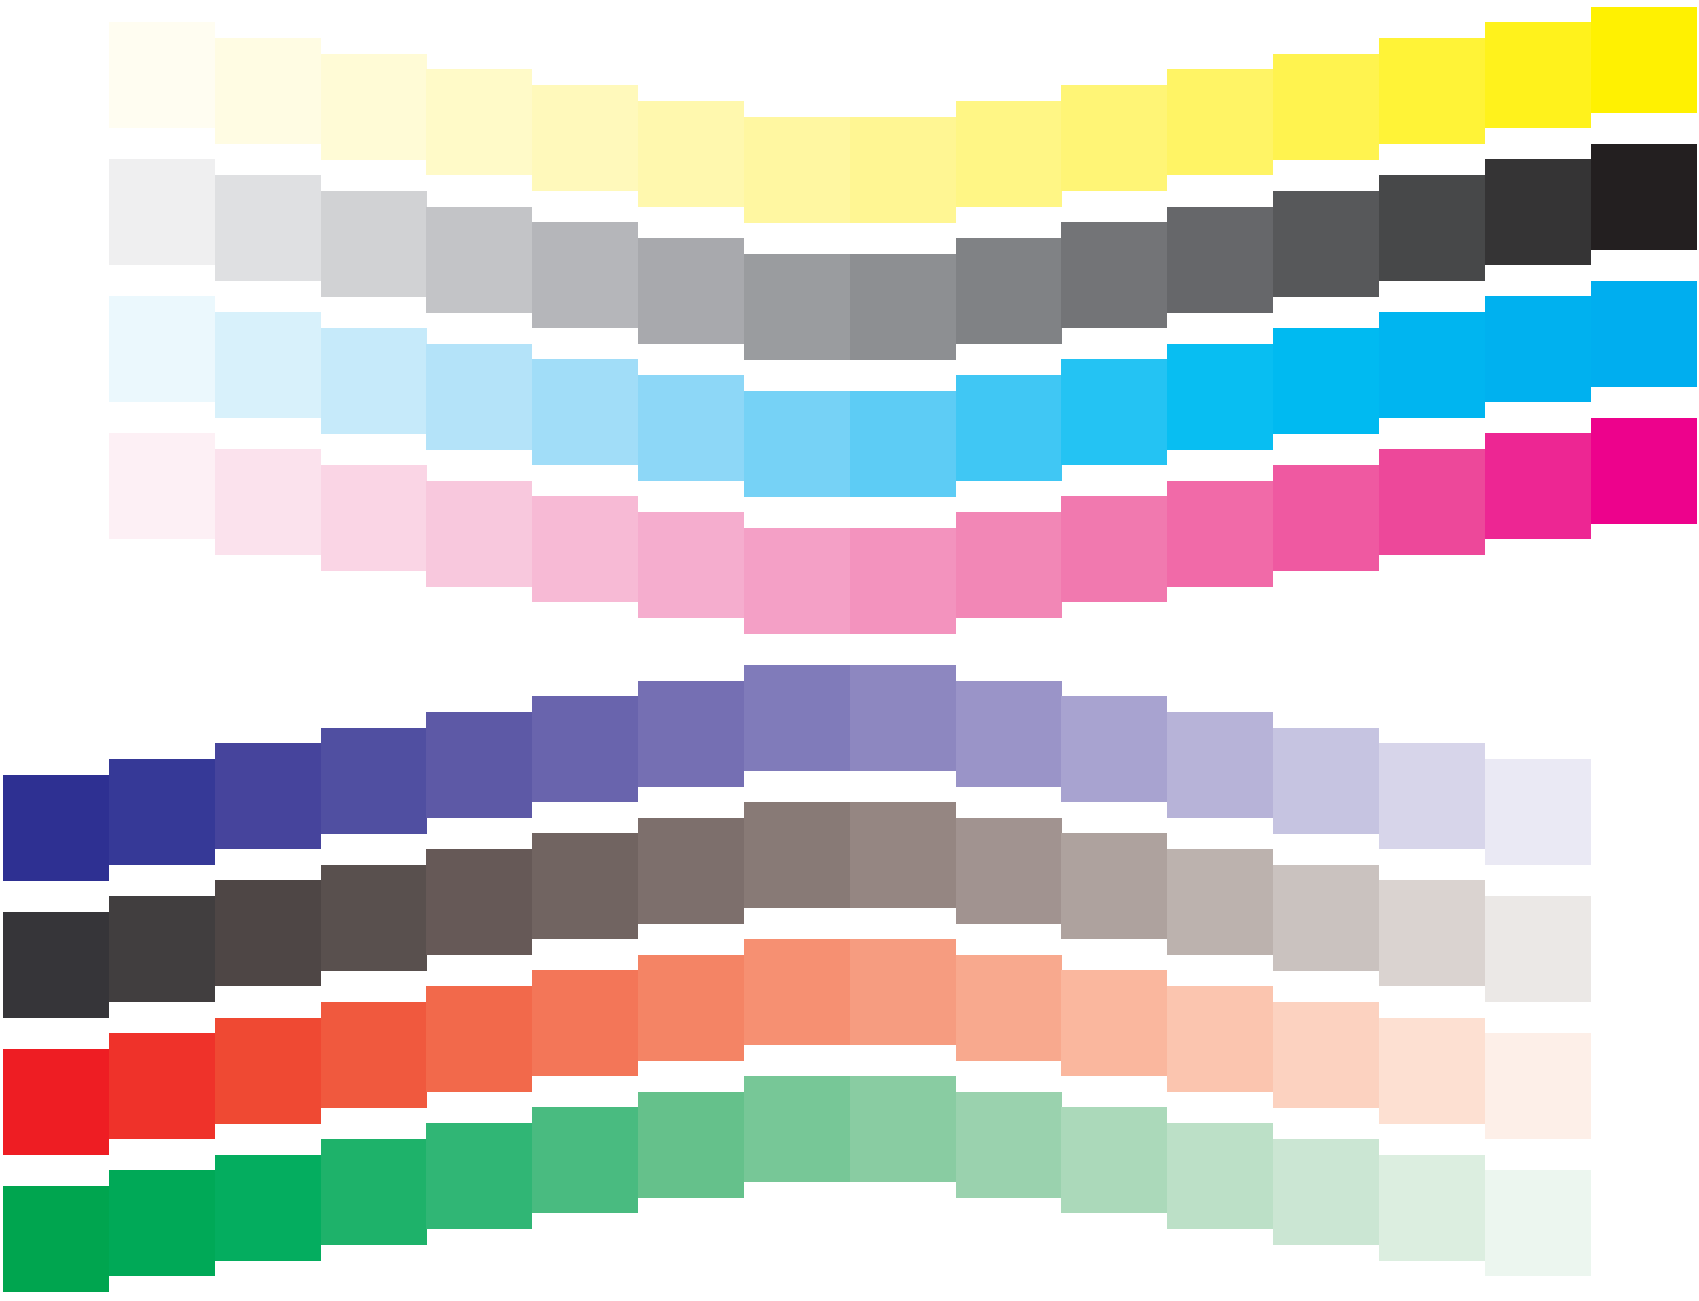


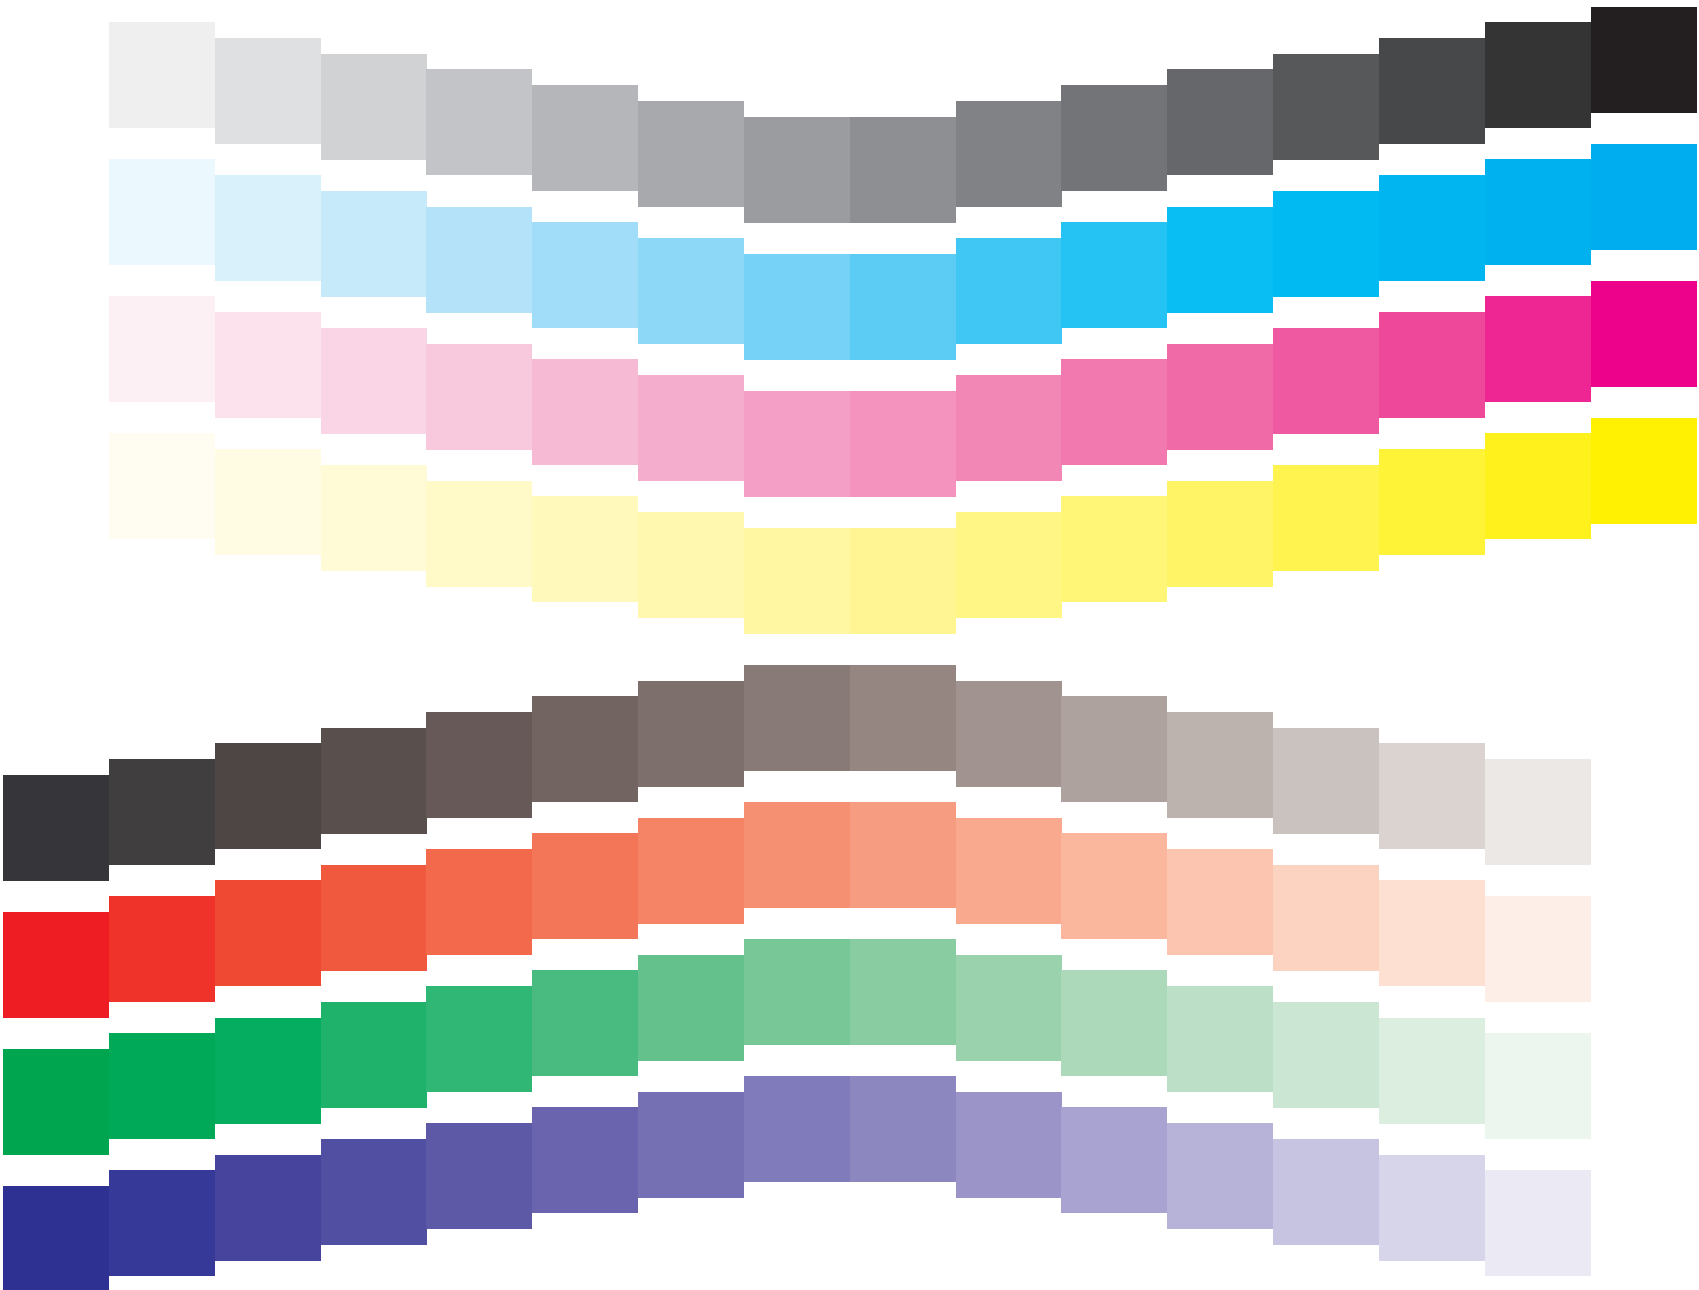

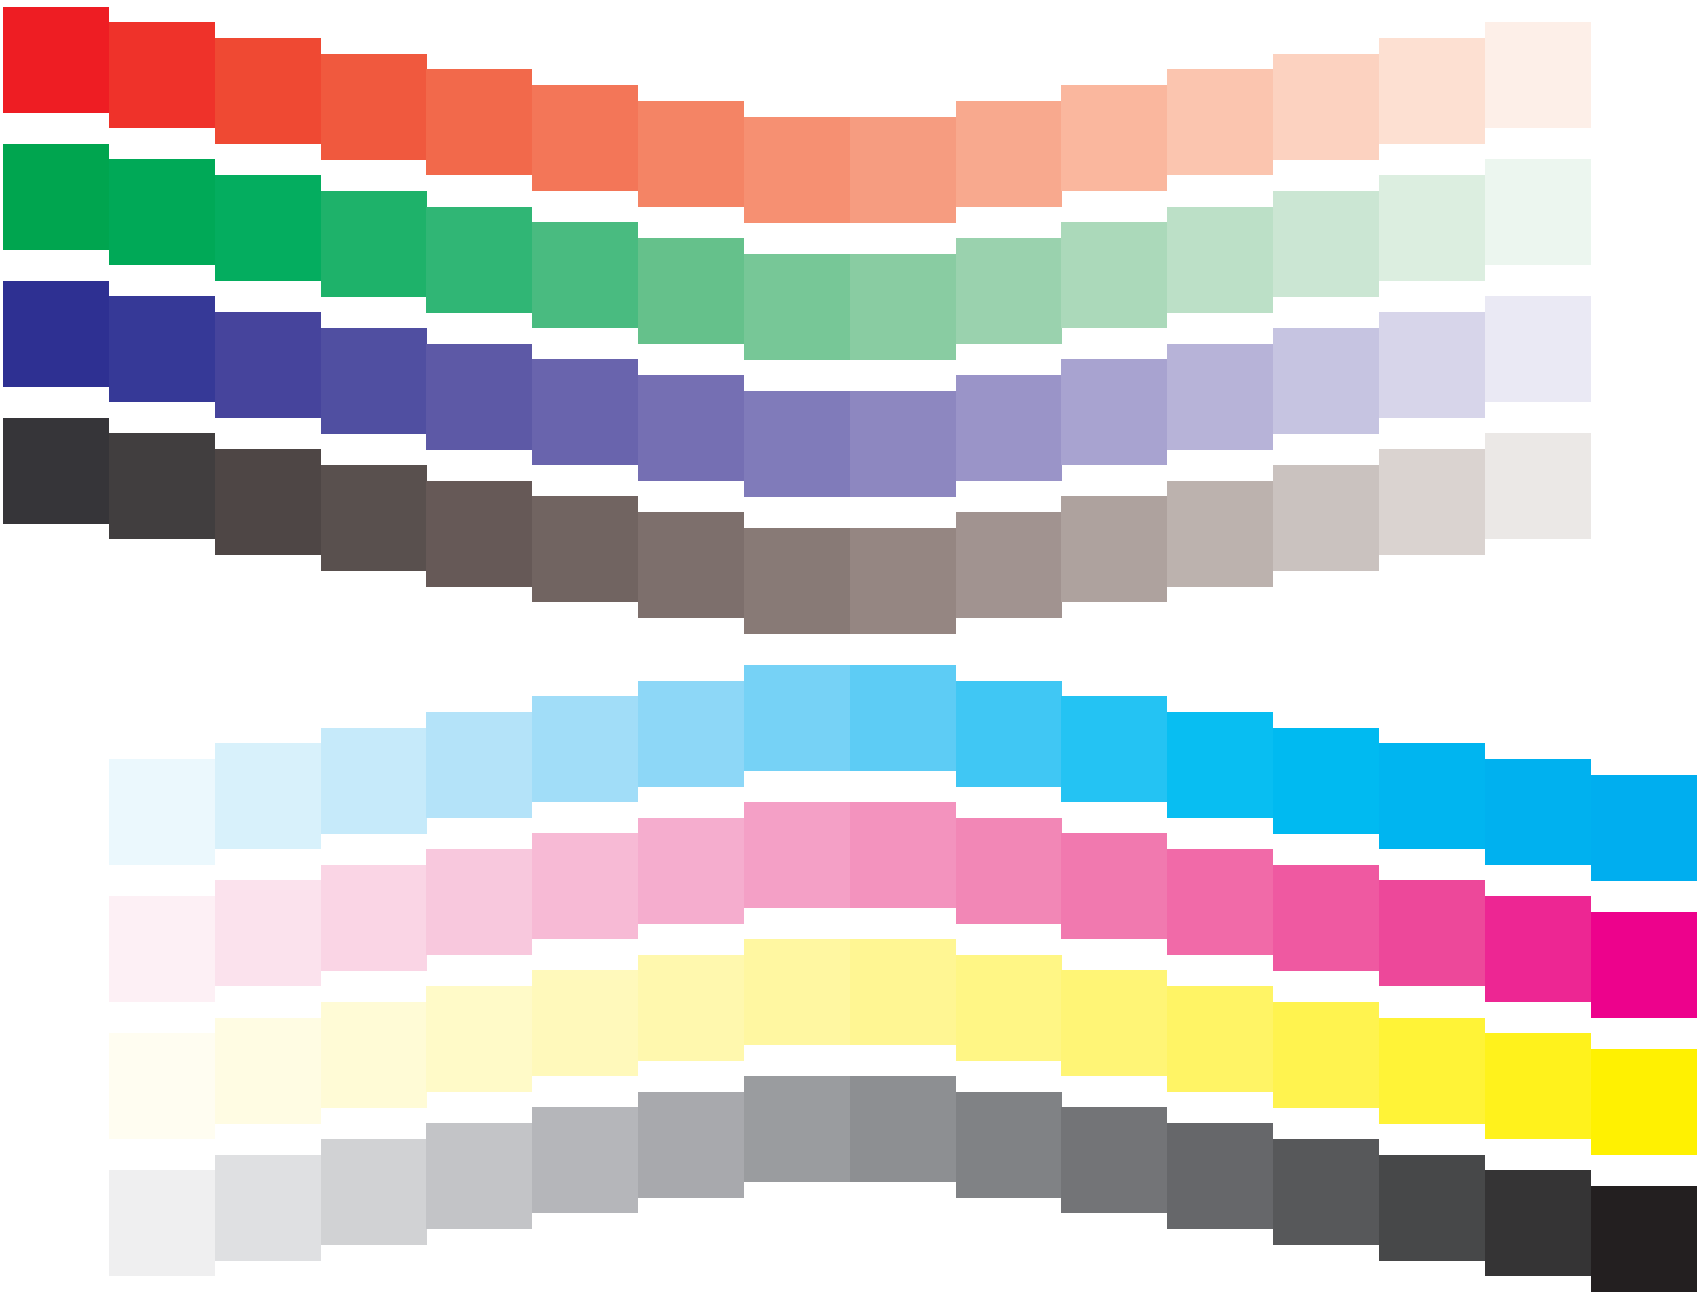

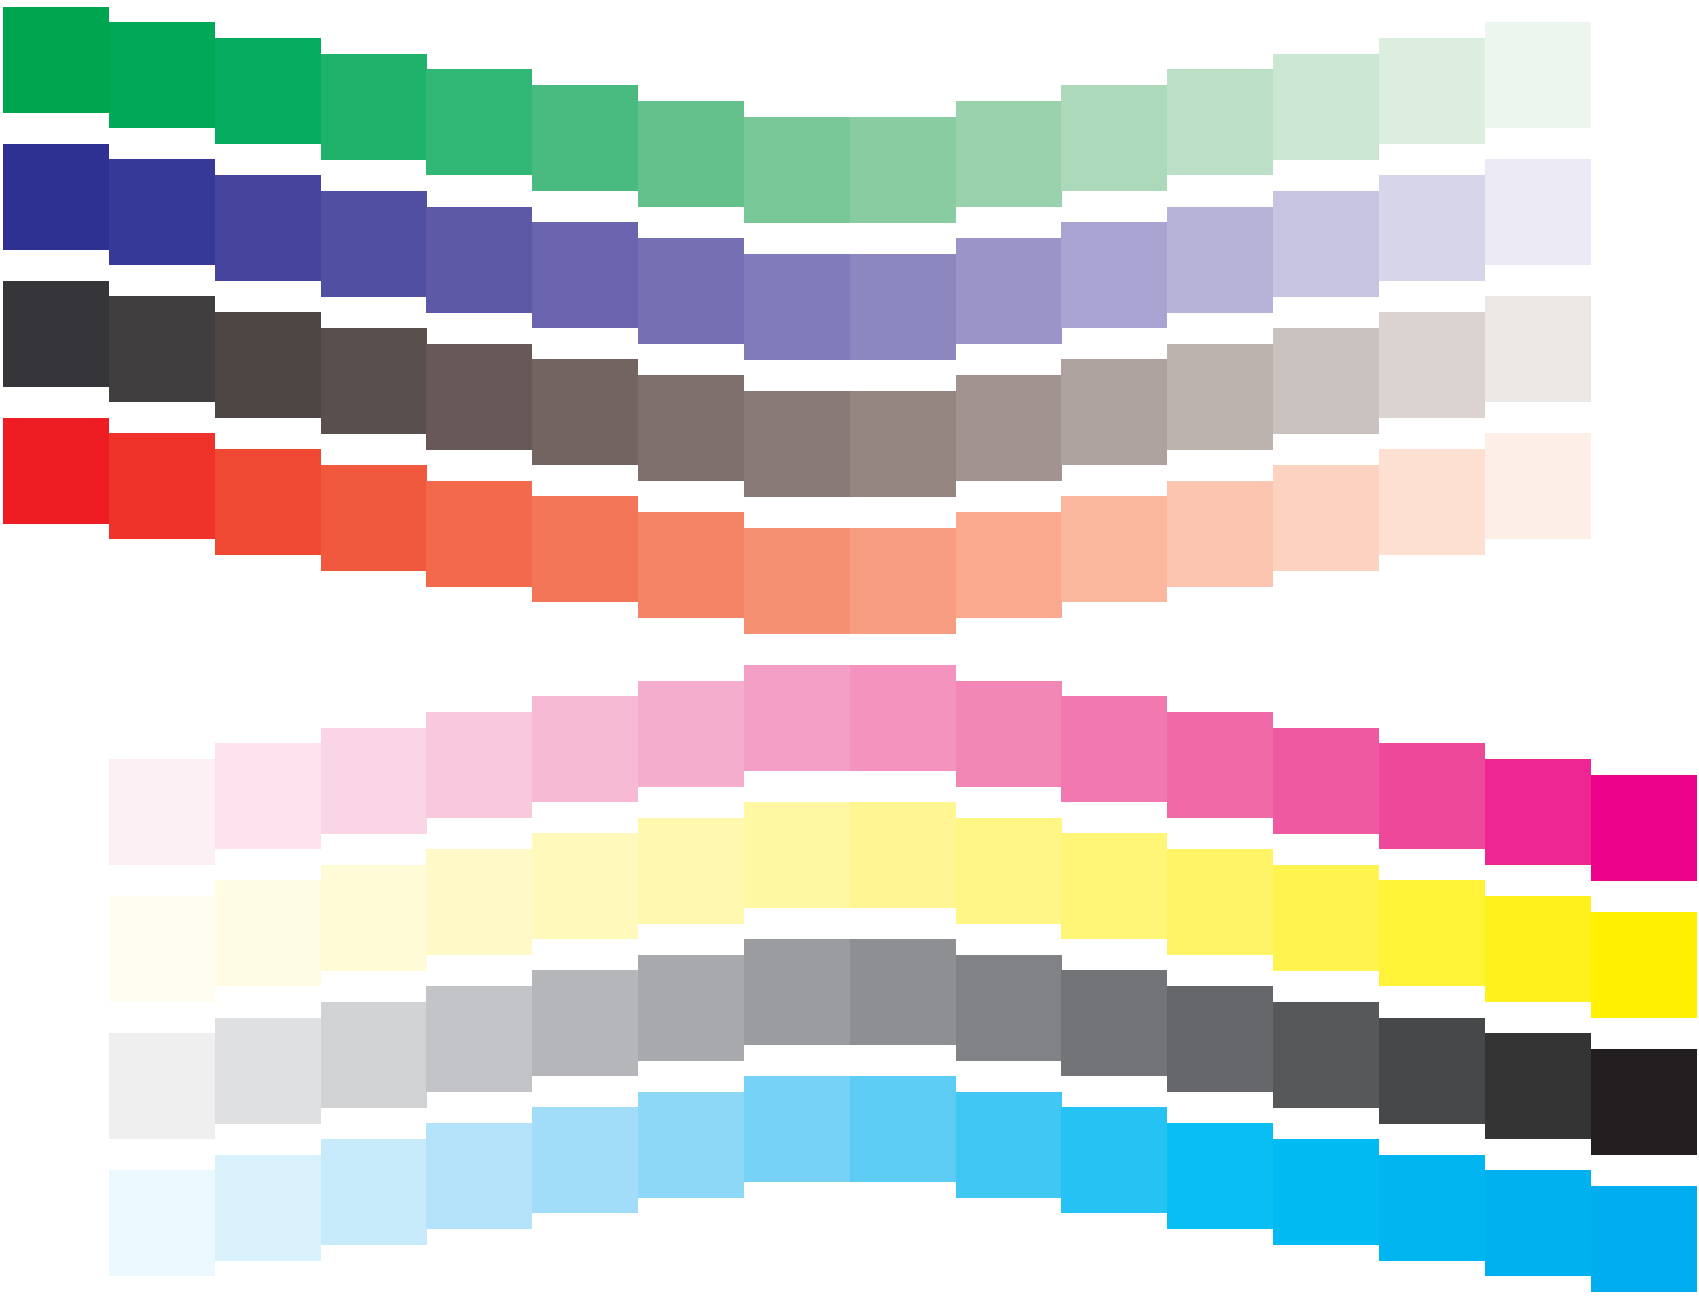

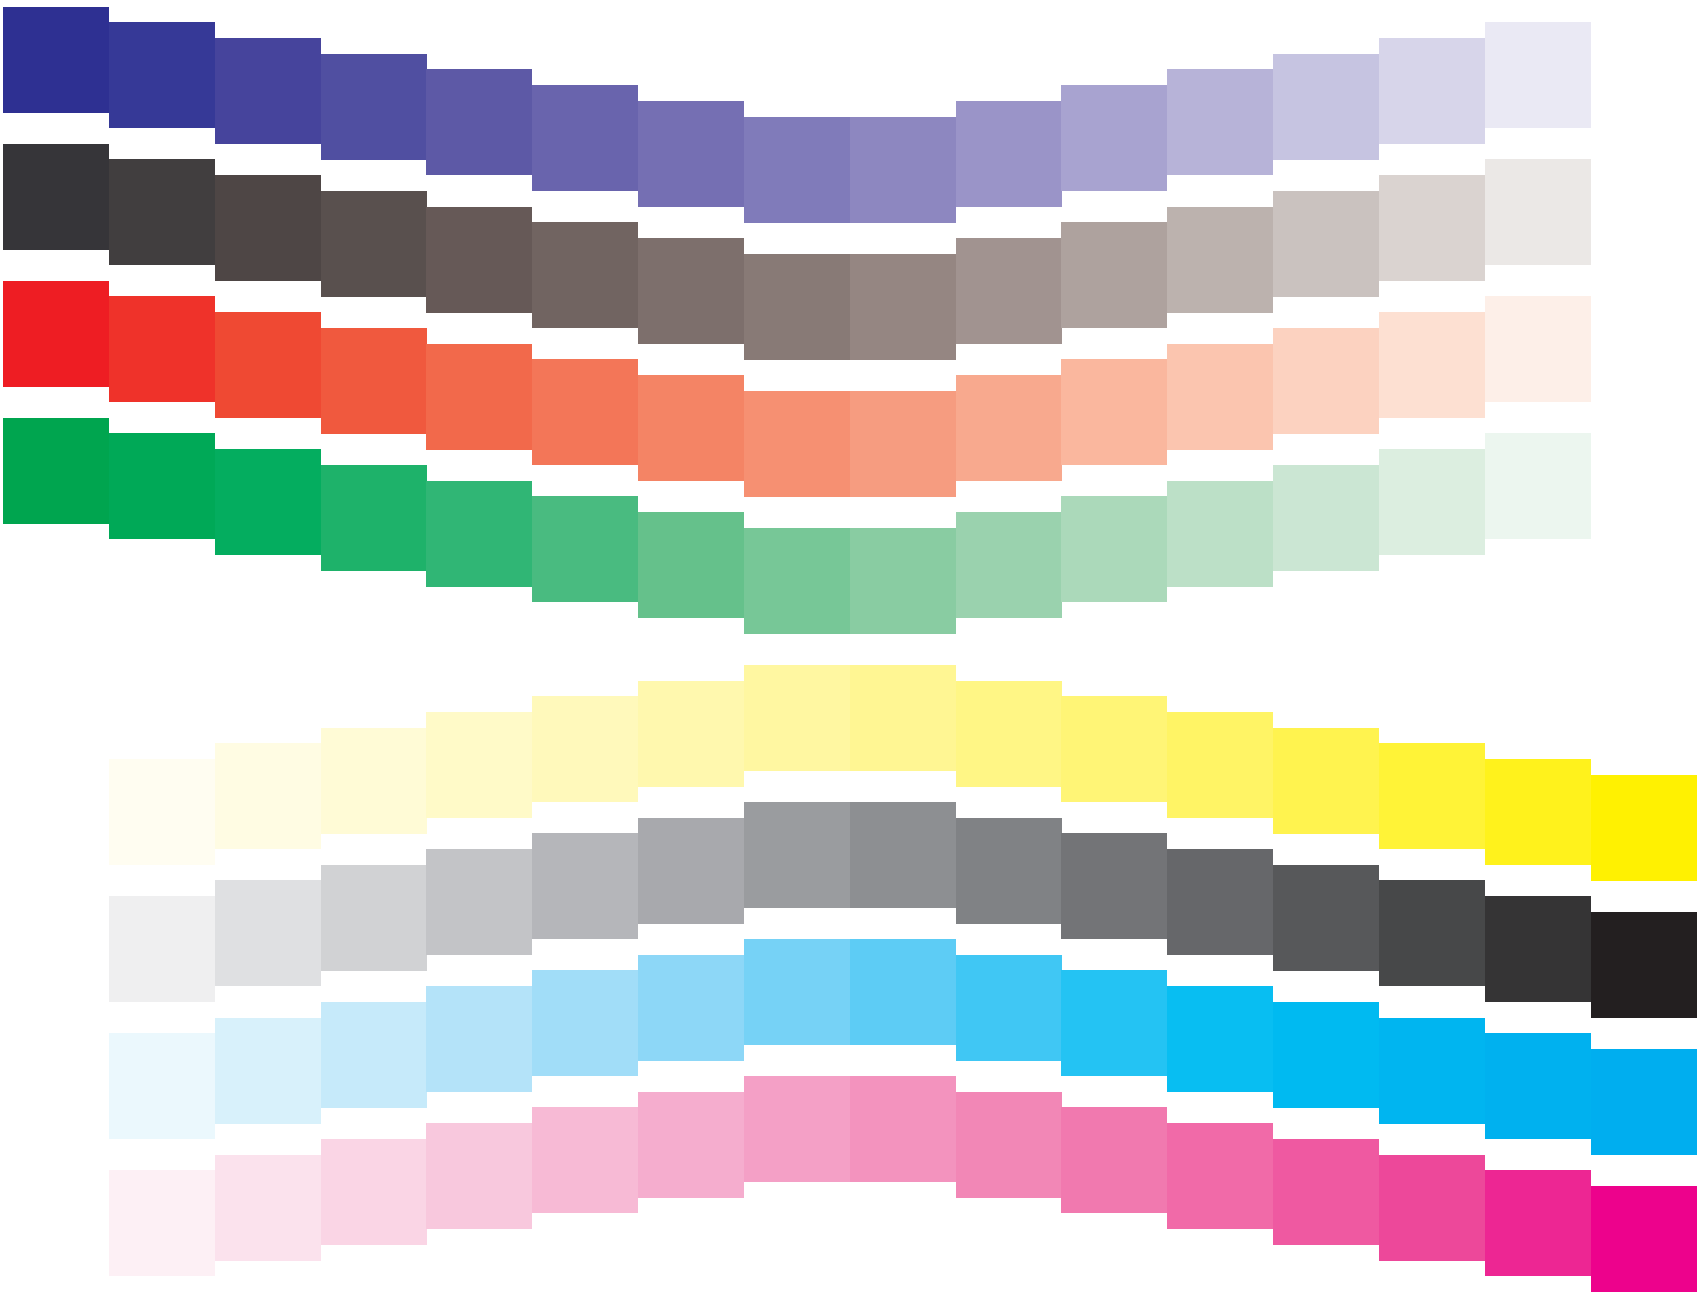

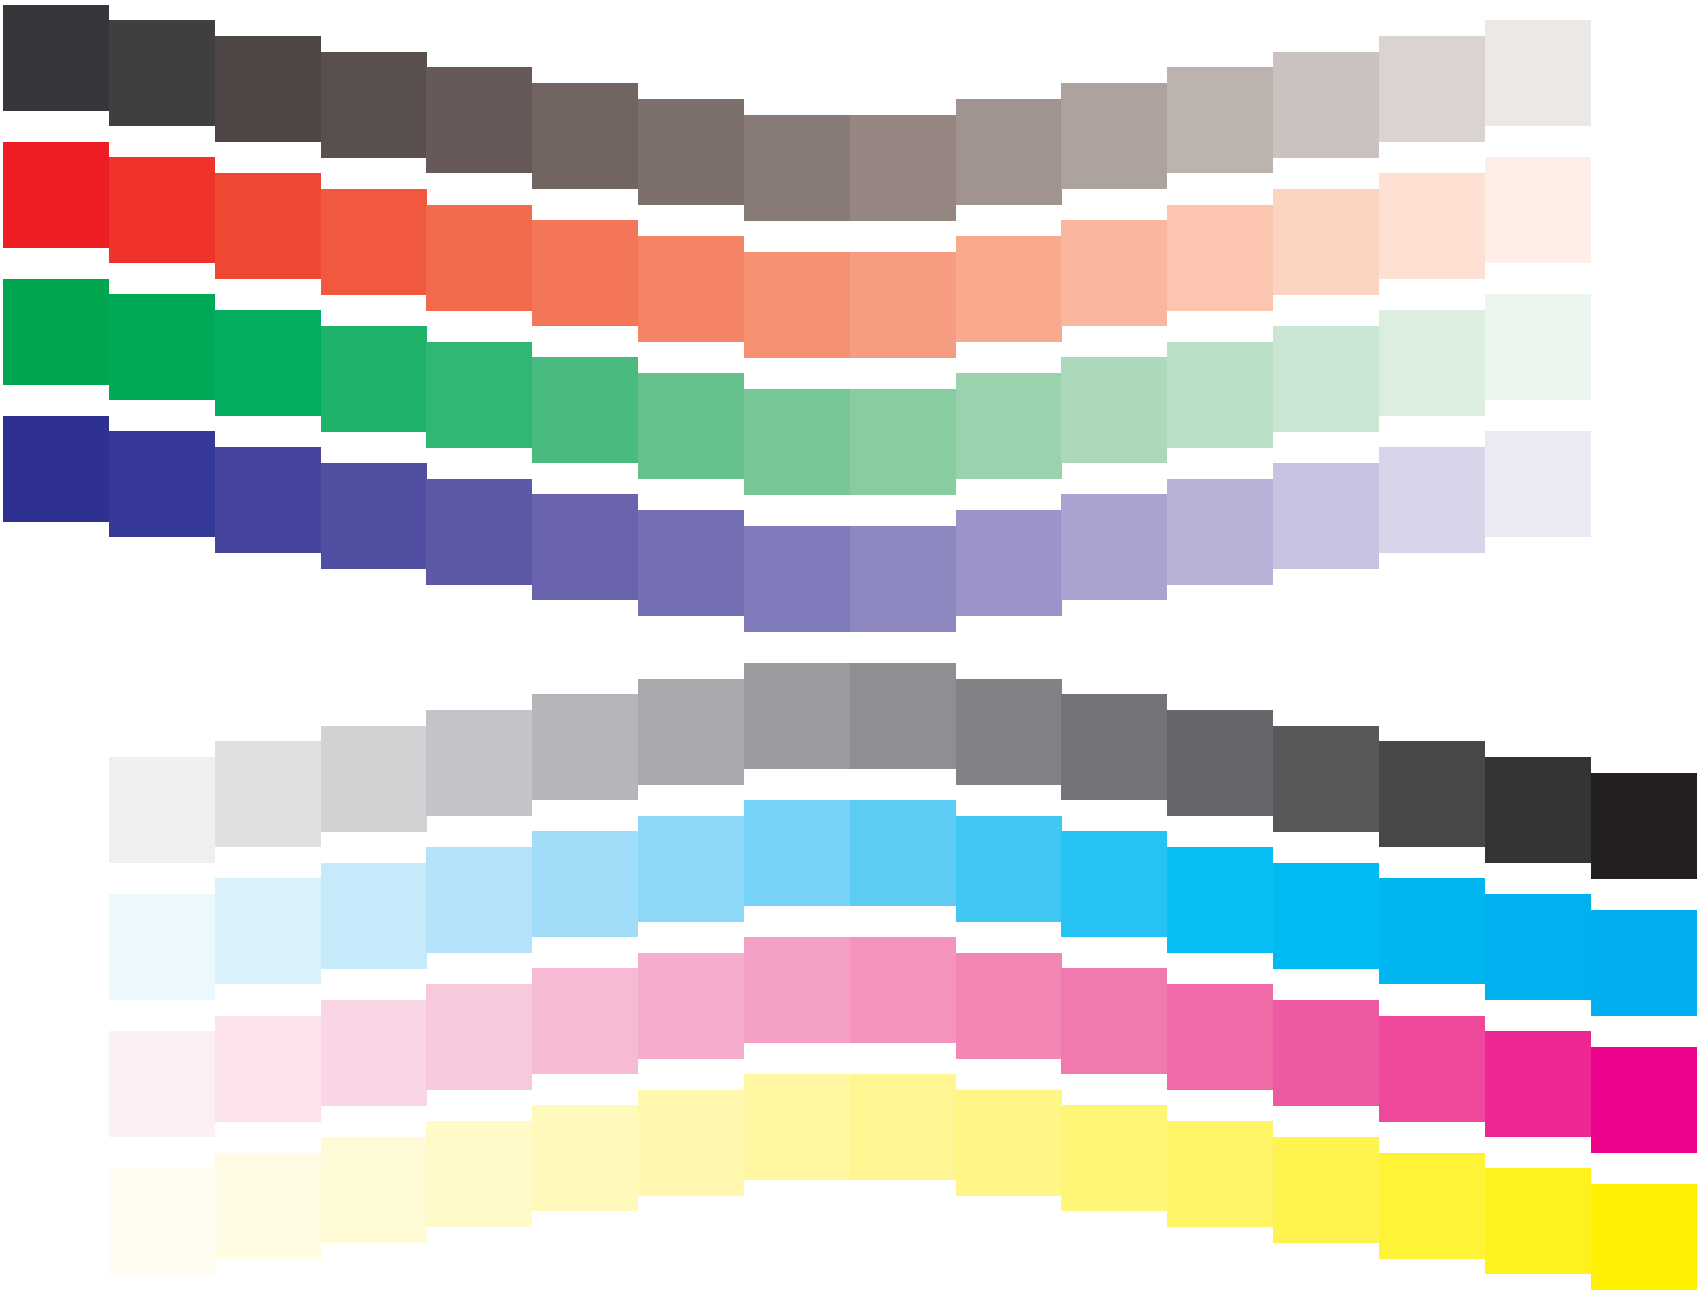

Proposal: Test chart for yield and emission of colour toner modules and inkjet cartridges, PDF-Format

Date, Test person: 2004-05-01, Name

Driver adjustment

Paper:

Resolution:

Modus:

Test device type: unknown



Test device number:

Ink: black:

coloured:

Driver version:

Test paper:



www.ps.bam.de/BE13/10L/L13E00NP.PS/.PDF; start output

N: No Output Linearization (OL) data in File (F), Startup (S) or Device (D)

224 mm (+/- 1 mm)



C c000* M 0m00* Y 00y0* N 000n* 1/70 mm (+/- 1 mm) O 0my0* L c0y0* V cm00* CMY cmY0*

See for similar files: <http://www.ps.bam.de/BE13/>
Technical information: <http://www.ps.bam.de> Version 2.0, io=0,0

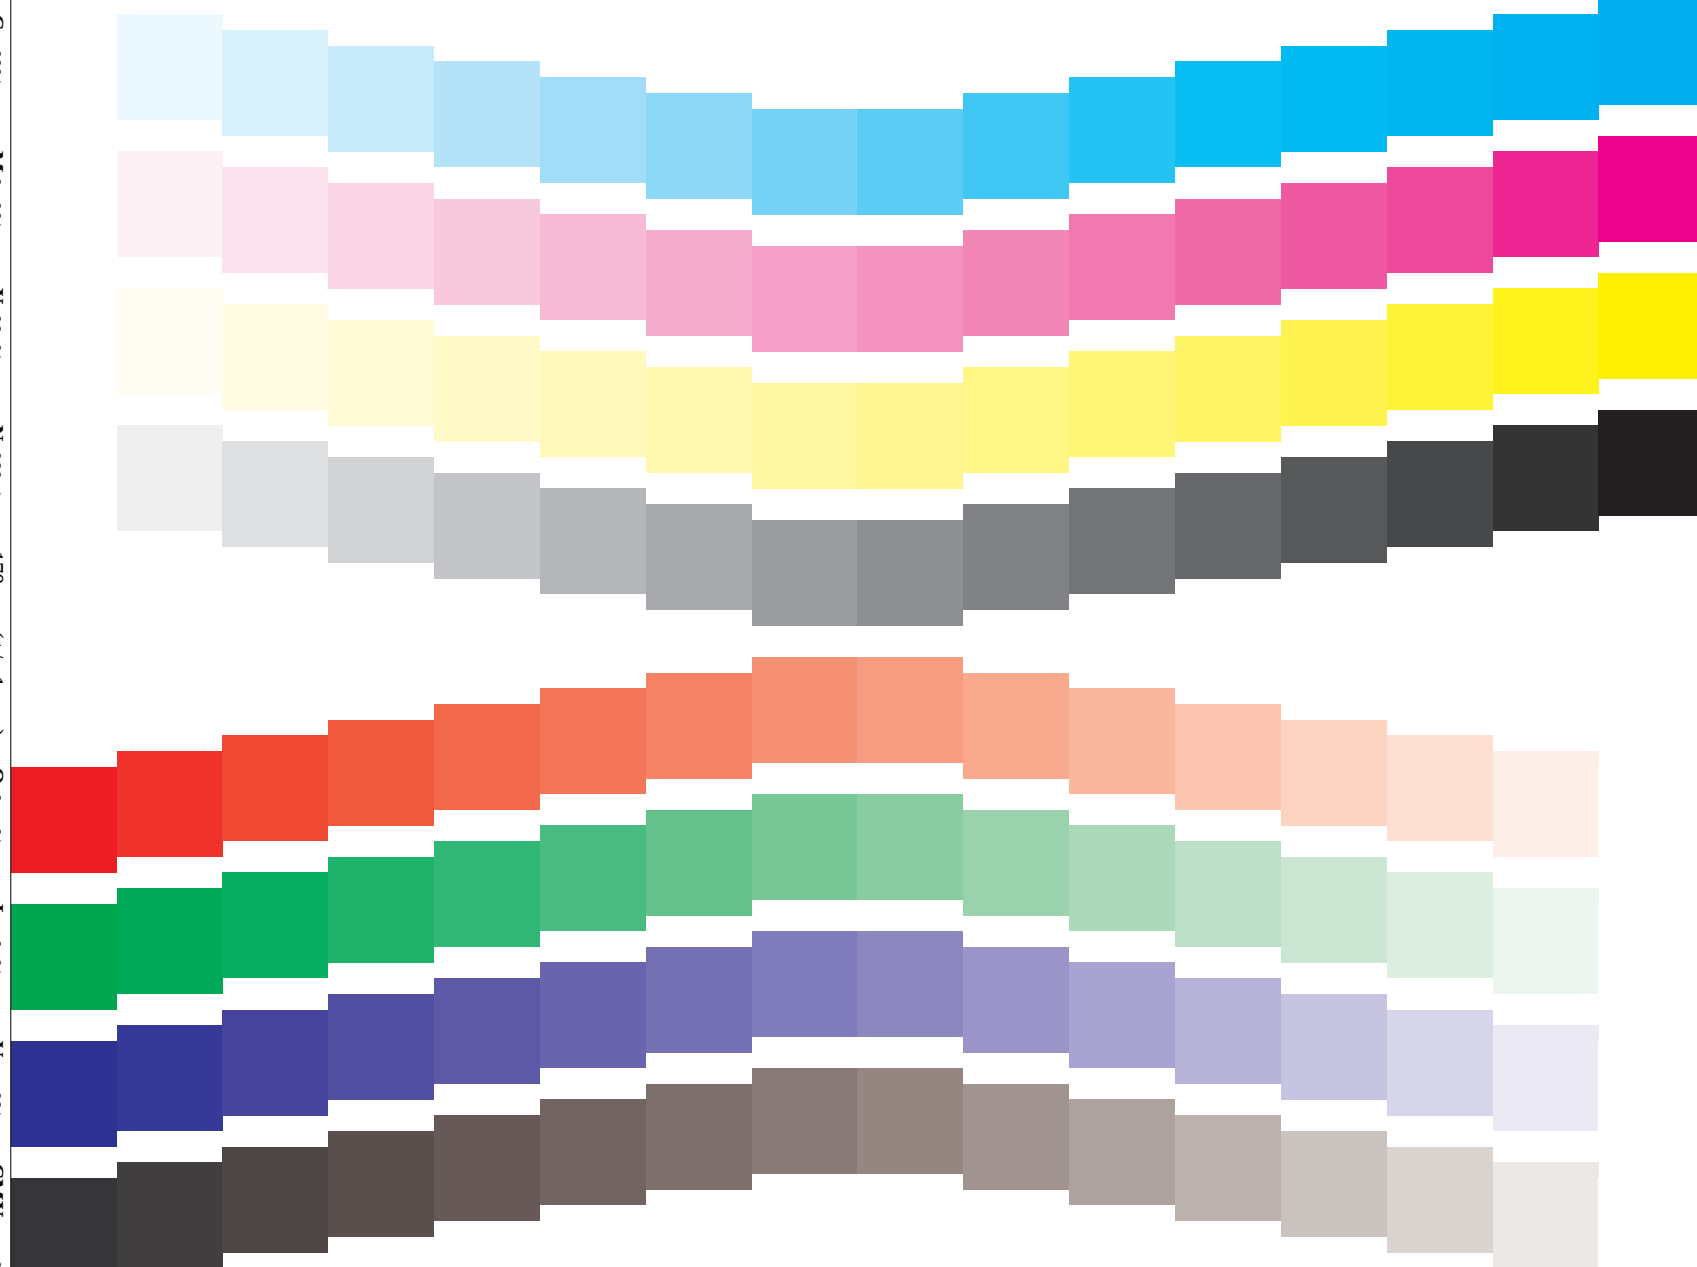


Fig. 1: Colour area 14 mm x 14 mm; Yield / Emission: 40% geometrical colour area coverage and 20% visual colour coverage; PS operator: cmy0* / 000n* setcmykcolor



BAM-test chart no. BE13

Step: S1

input: cmy0* / 000n* setcmykcolor

Yield/Emission: 40% geometrical and 20% visual area coverage output: no change compared to input



