


See for similar files: <http://www.ps.bam.de/BE16/>
Technical information: <http://www.ps.bam.de>

Version 2.0, io=0; iORS; oORS, CIE/LAB

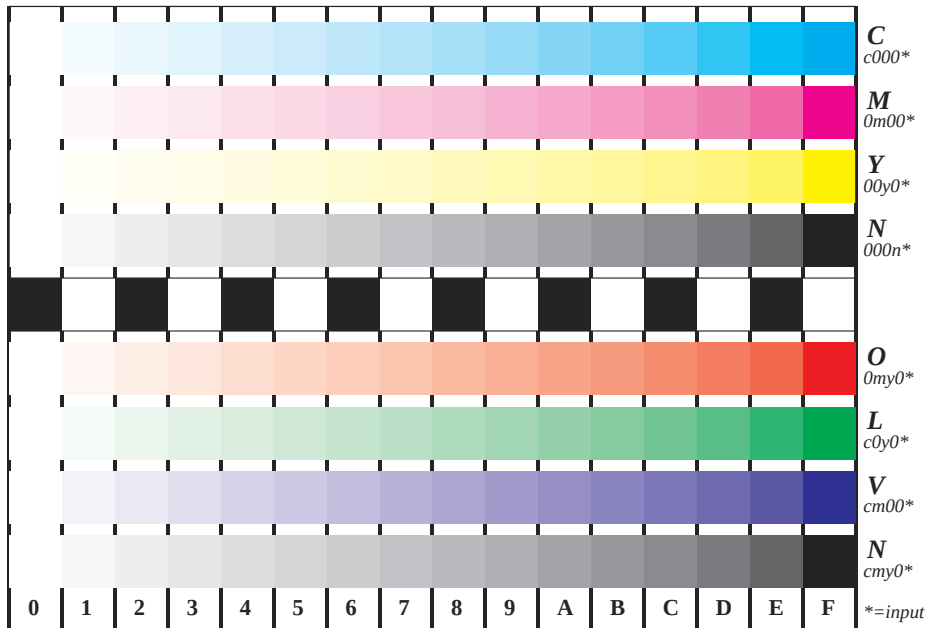

Picture 5: 16 equidistant steps for "measurement", "banding" and "strike through"; Use of PS operator; B4: $\text{cmy0}^* / 000n^* \text{ setcmykcolor}$; D4: $\text{cmy0}^* \text{ setcmykcolor}$ (only)

BAM-test chart no. BE16

Color reproduction properties of ISO/IEC TR 19797 and 24705

Step: S2

input: $\text{cmy0}^* / 000n^* \text{ setcmykcolor}$

output: $\text{cmy0}^* / 000n^* \text{ setcmykcolor}$

BAM registration: 20040501-BE16/10Q/Q16E00F1.PS/.TXT
BAM material: code=ha4ta
application for relative yield and reproduction properties of chromatic printers

IEC TR 19797, Part 1, Series 1/L, Page 1
Page count: 1