



A1

JDEI

Funtres Solber Netener

Version 2.0, io=0,0?

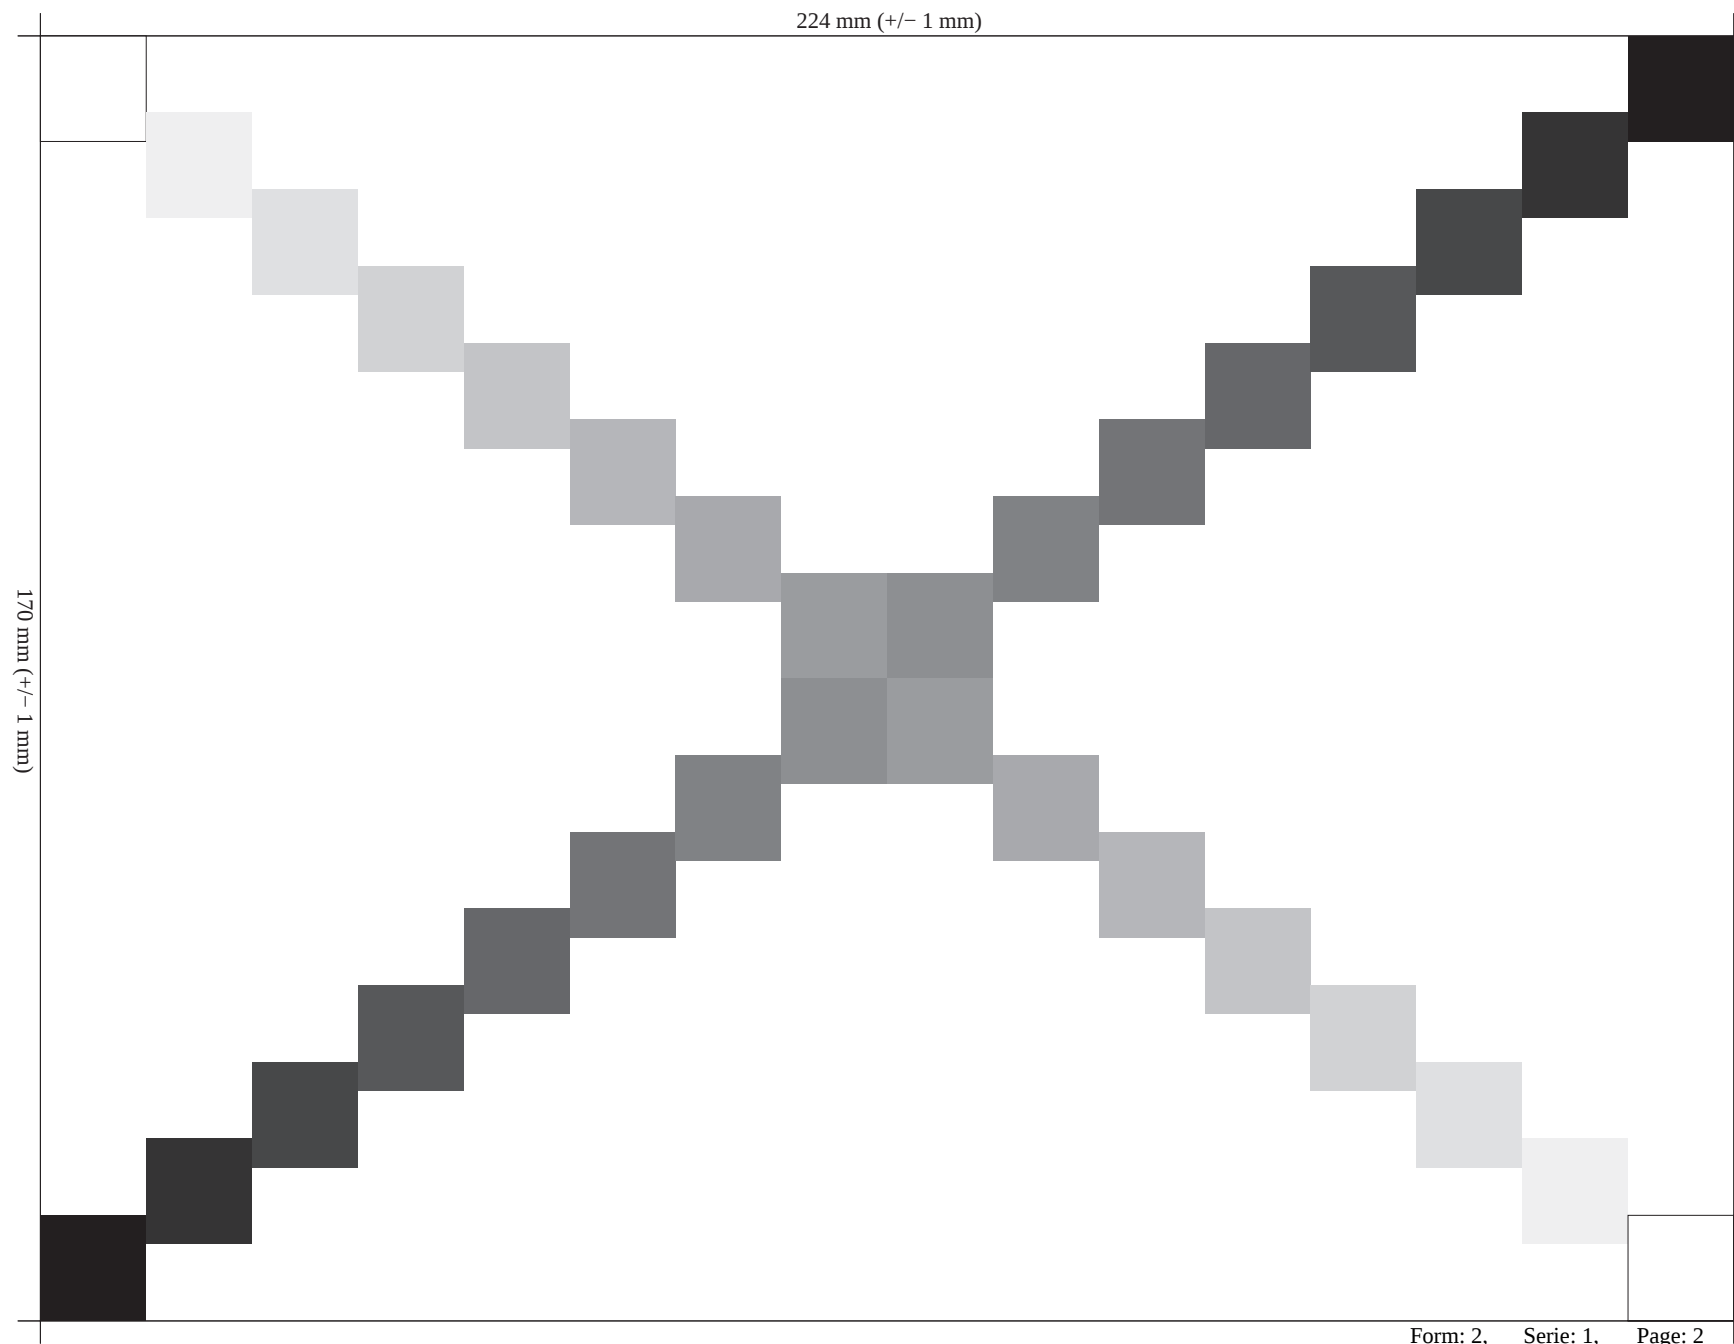


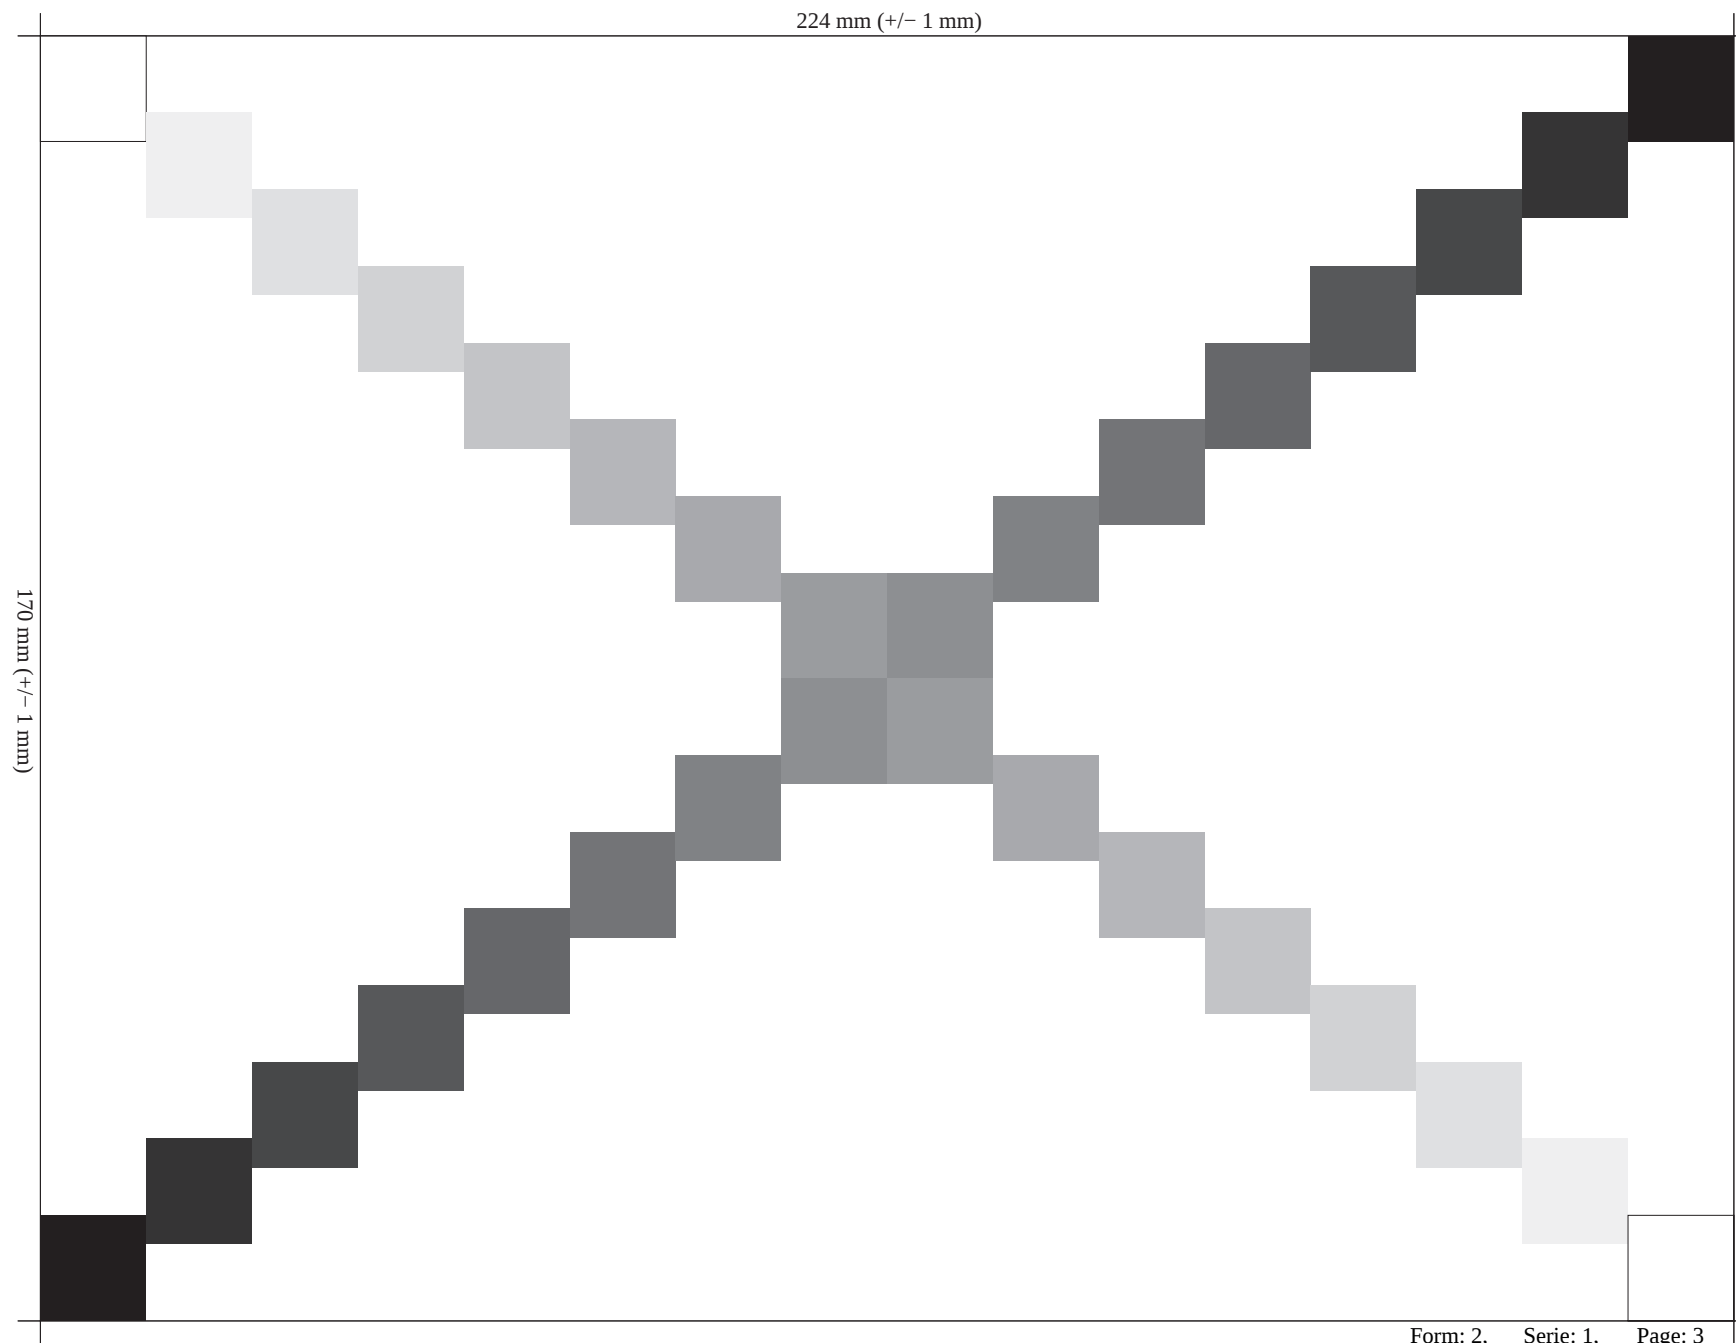


See for similar files: <http://www.ps.bam.de/BE95/>
Technical information: <http://www.ps.bam.de/19752>

Version 2.0, io=0.0?


BAM registration: 20030501-BE95/10L/Q95E02SP.PS/.PDF BAM material: code=rh4ta
application for yield test of monochromatic printers

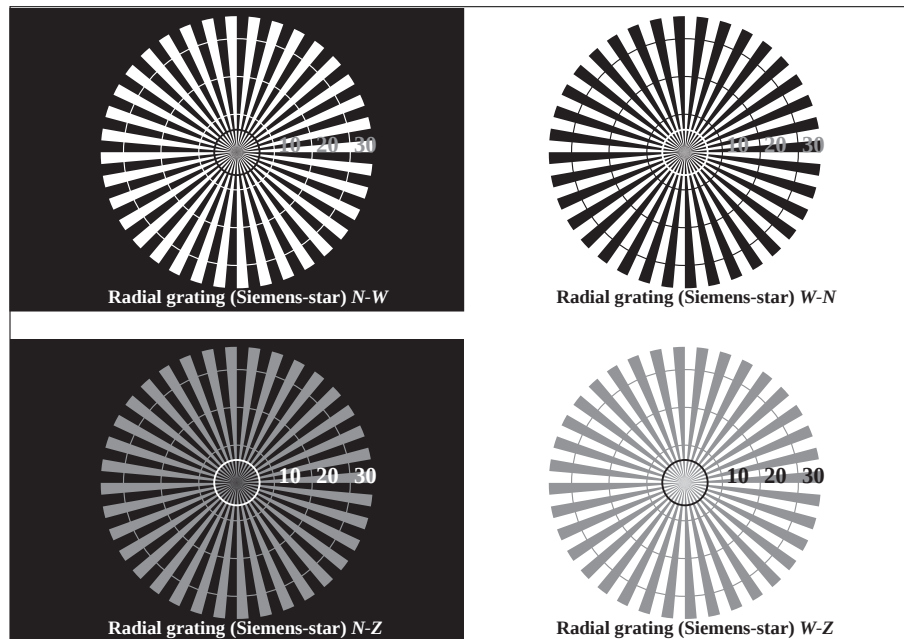

Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS operator: 000n* setcmykcolor

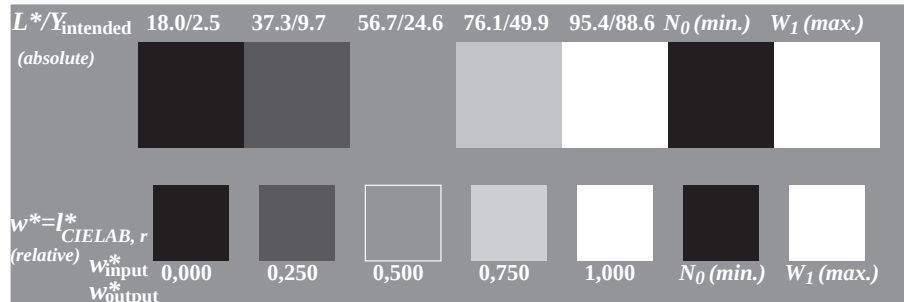

Picture C2: 5 visual equidistant L^* -grey steps + N_0 + W_1 ; PS operator: 000n* setcmykcolor

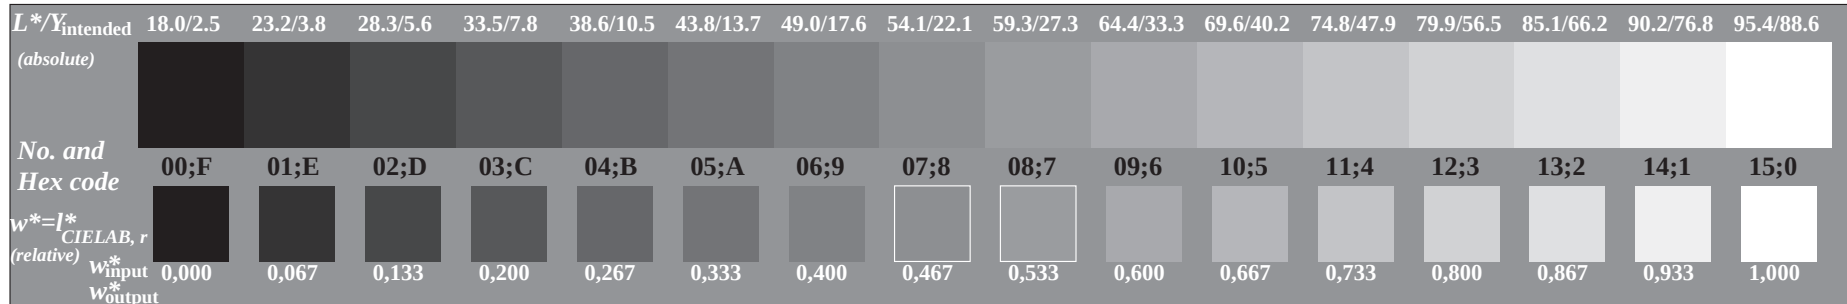


Picture C3: 16 visual equidistant L^* -grey steps; PS operator: 000n* setcmykcolor


ISO/IEC 19752-test chart, form 3
Proposal by DIN NI28

2003-05-01, name1 input: 000n* setcmykcolor
Test device type: name2 output: Startup (S) data depend


Form: 3, Serie: 1, Page: 4

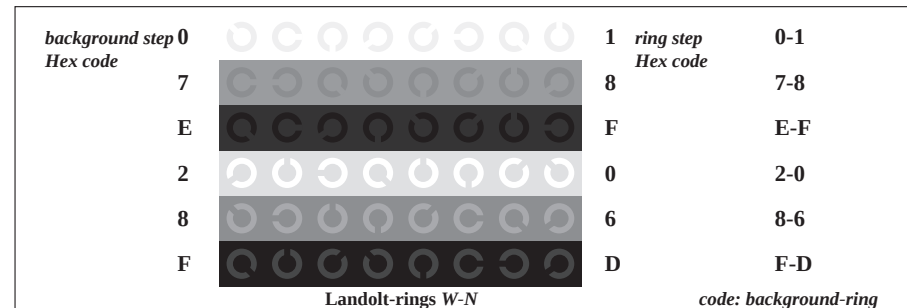

Picture C4: Landolt-rings W-N; PS operator: 000n* setcmykcolor

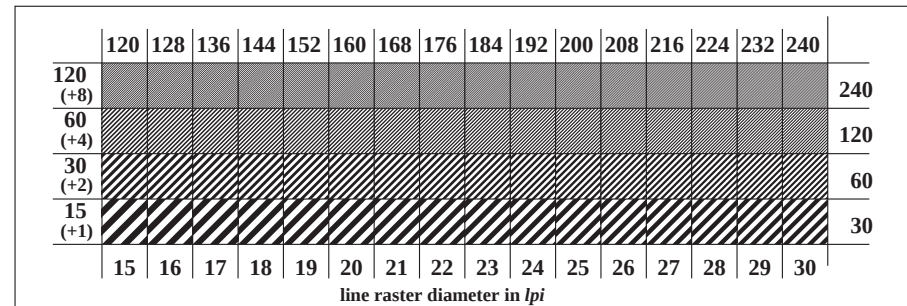

Picture C5: Line raster under 45° (or 135°); PS operator: 000n* setcmykcolor

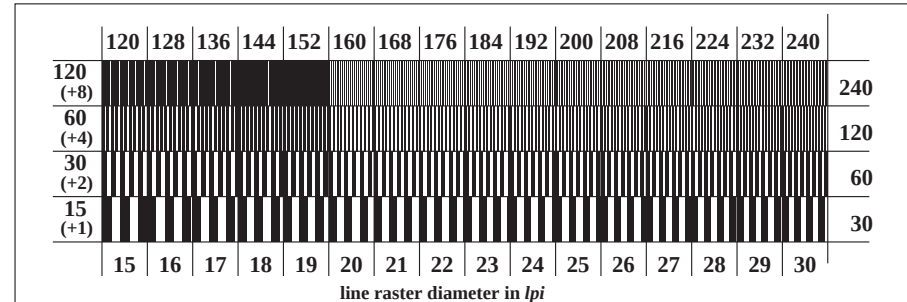

Picture C6: Line raster under 90° (or 0°); Use of the PS operator 000n* setcmykcolor

170 mm (+/- 1 mm)

N 0000*

N 0001*

Form 4: Grey areas 14 mm x 14 mm for yield or emission: 10% geometrical and 5% visual area coverage; PS operator used: 000n* setcmykcolor

Form: 4,

Serie: 1,

Page: 5

BAM registration: 20030501-BE95/10L/Q95E03SP.PS/.PDF BAM material: code=rh4ta
application for yield test of monochromatic printers

See for similar files: <http://www.ps.bam.de/BE95/>
Technical information: <http://www.ps.bam.de/19752> Version 2.0, io=0,0?

170 mm (+/- 1 mm)


Grey Page

White Page

Black Page

See for similar files: <http://www.ps.bam.de/BE95/>
Technical information: <http://www.ps.bam.de/19752> Version 2.0, io=0,0?

BAM registration: 20030501-BE95/10L/Q95E08SP.PS/.PDF BAM material: code=rh4ta
application for yield test of monochromatic printers

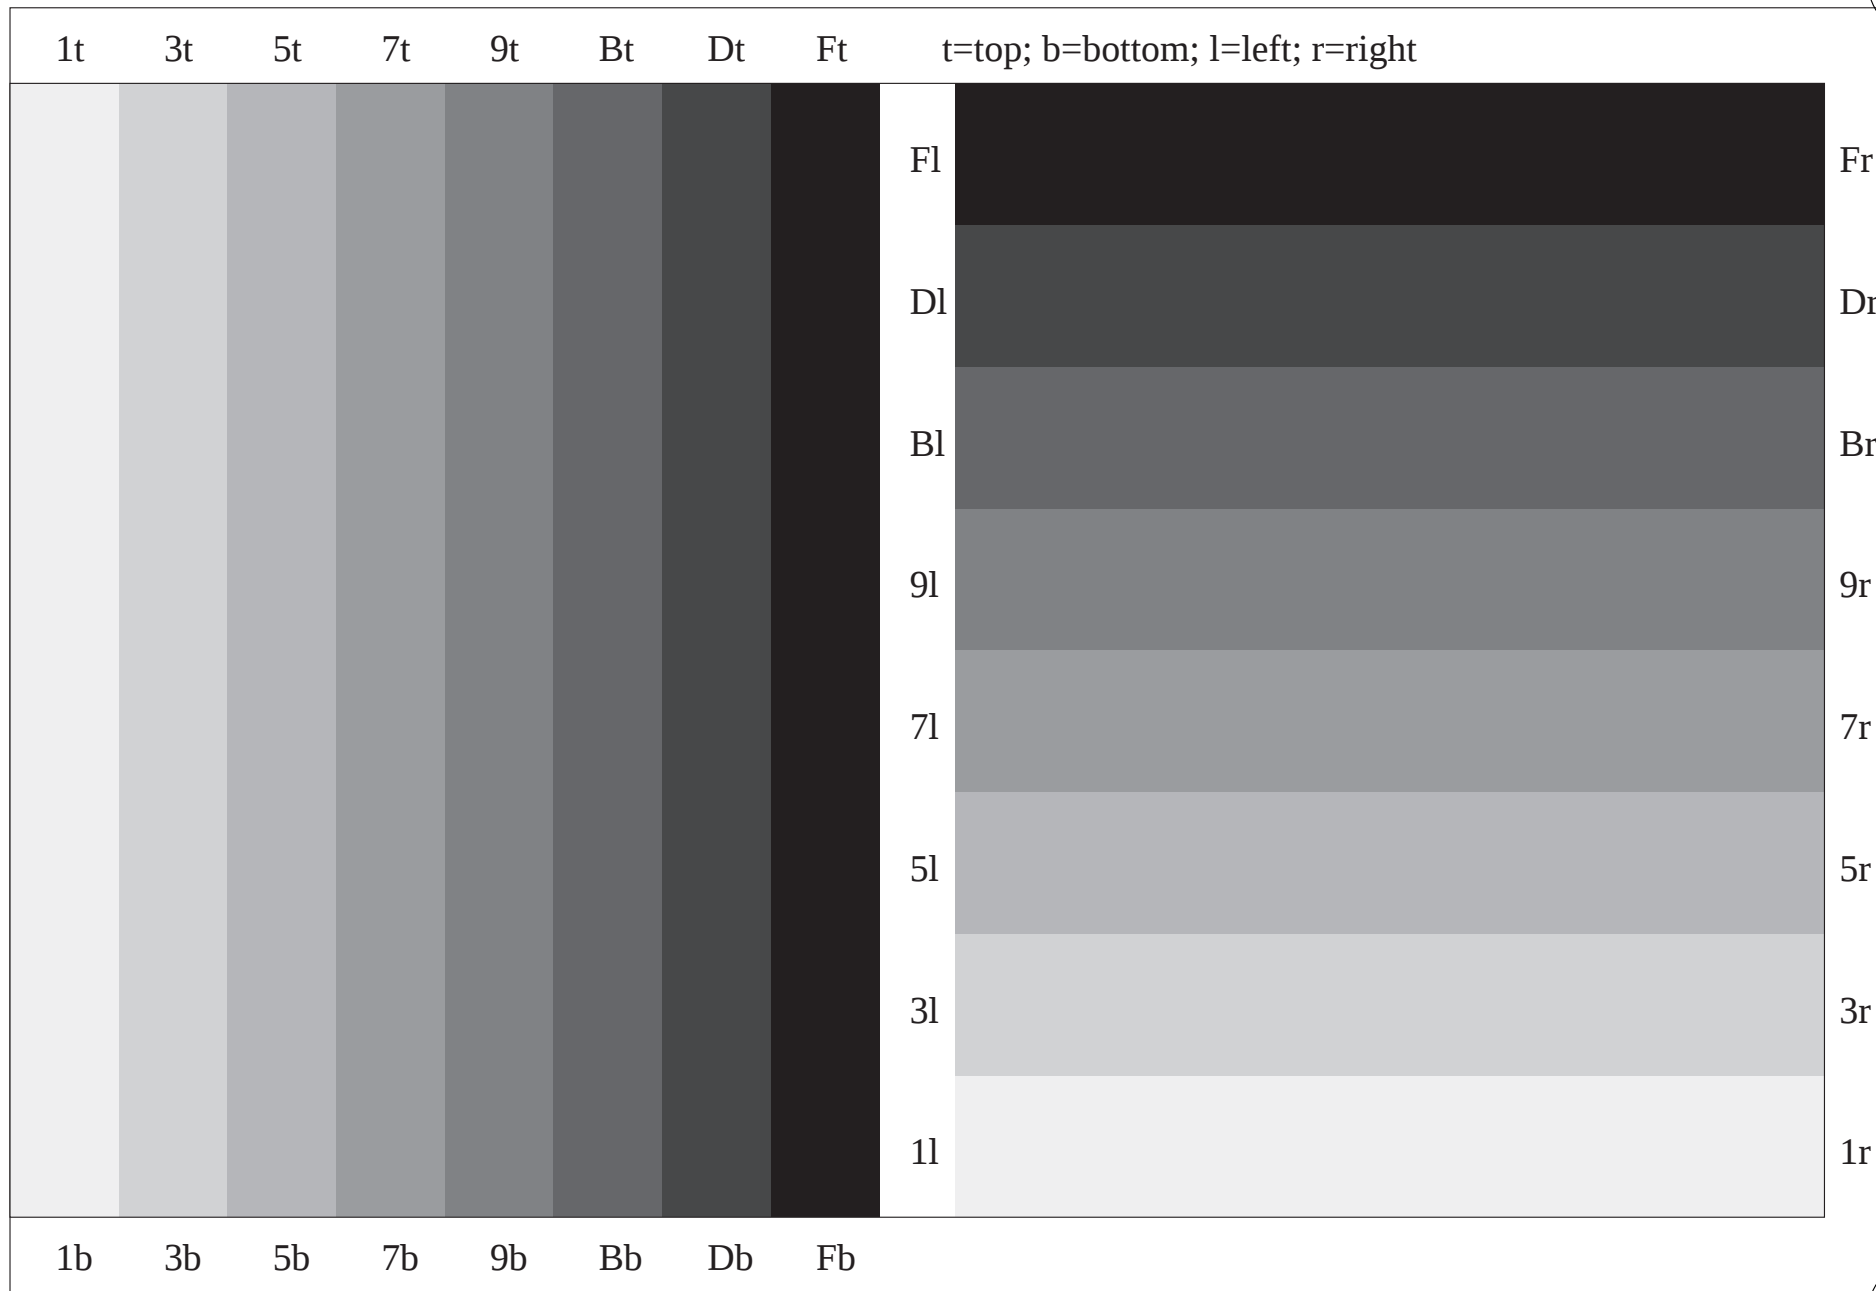

Form 9: Grey rectangles 115 mm x 14.4 mm for yield or emission; PS operator used: 000n* setcmykcolor

ISO/IEC 19752-test chart, form 9
Proposal by DIN NI28

2003-05-01, name1 input: 000n* setcmykcolor
Test device type: name2 output: *Startup (S) data depend*

Form: 9, Serie: 1, Page: 10

Stephen J.Singel
Labanda Sinpat Abarress
Tendar,BSF
URANGLE



Landolt-rings W-N





L^* / Y (absolute)	18,0/2,5	23,1/3,8	28,2/5,5	33,3/7,7	38,5/10,3	43,6/13,6	48,8/17,4	54,0/21,9	59,1/27,2	64,3/33,2	69,5/40,0	74,7/47,8	79,8/56,5	85,0/66,1	90,2/76,8	95,4/88,6
No. and Hex code	00,F	01,E	02,D	03,C	04,B	05,A	06,9	07,8	08,7	09,6	10,5	11,4	12,3	13,2	14,1	15,0
L^* _{CIELAB,r} w^*	0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000


Stephen J.Singel
Demperta Aminerimum
Labanda Sinpat Abarress

SJS:dwg


Technical information: <http://www.ps.bam.de/19752> Version 2.0, io=0,0?

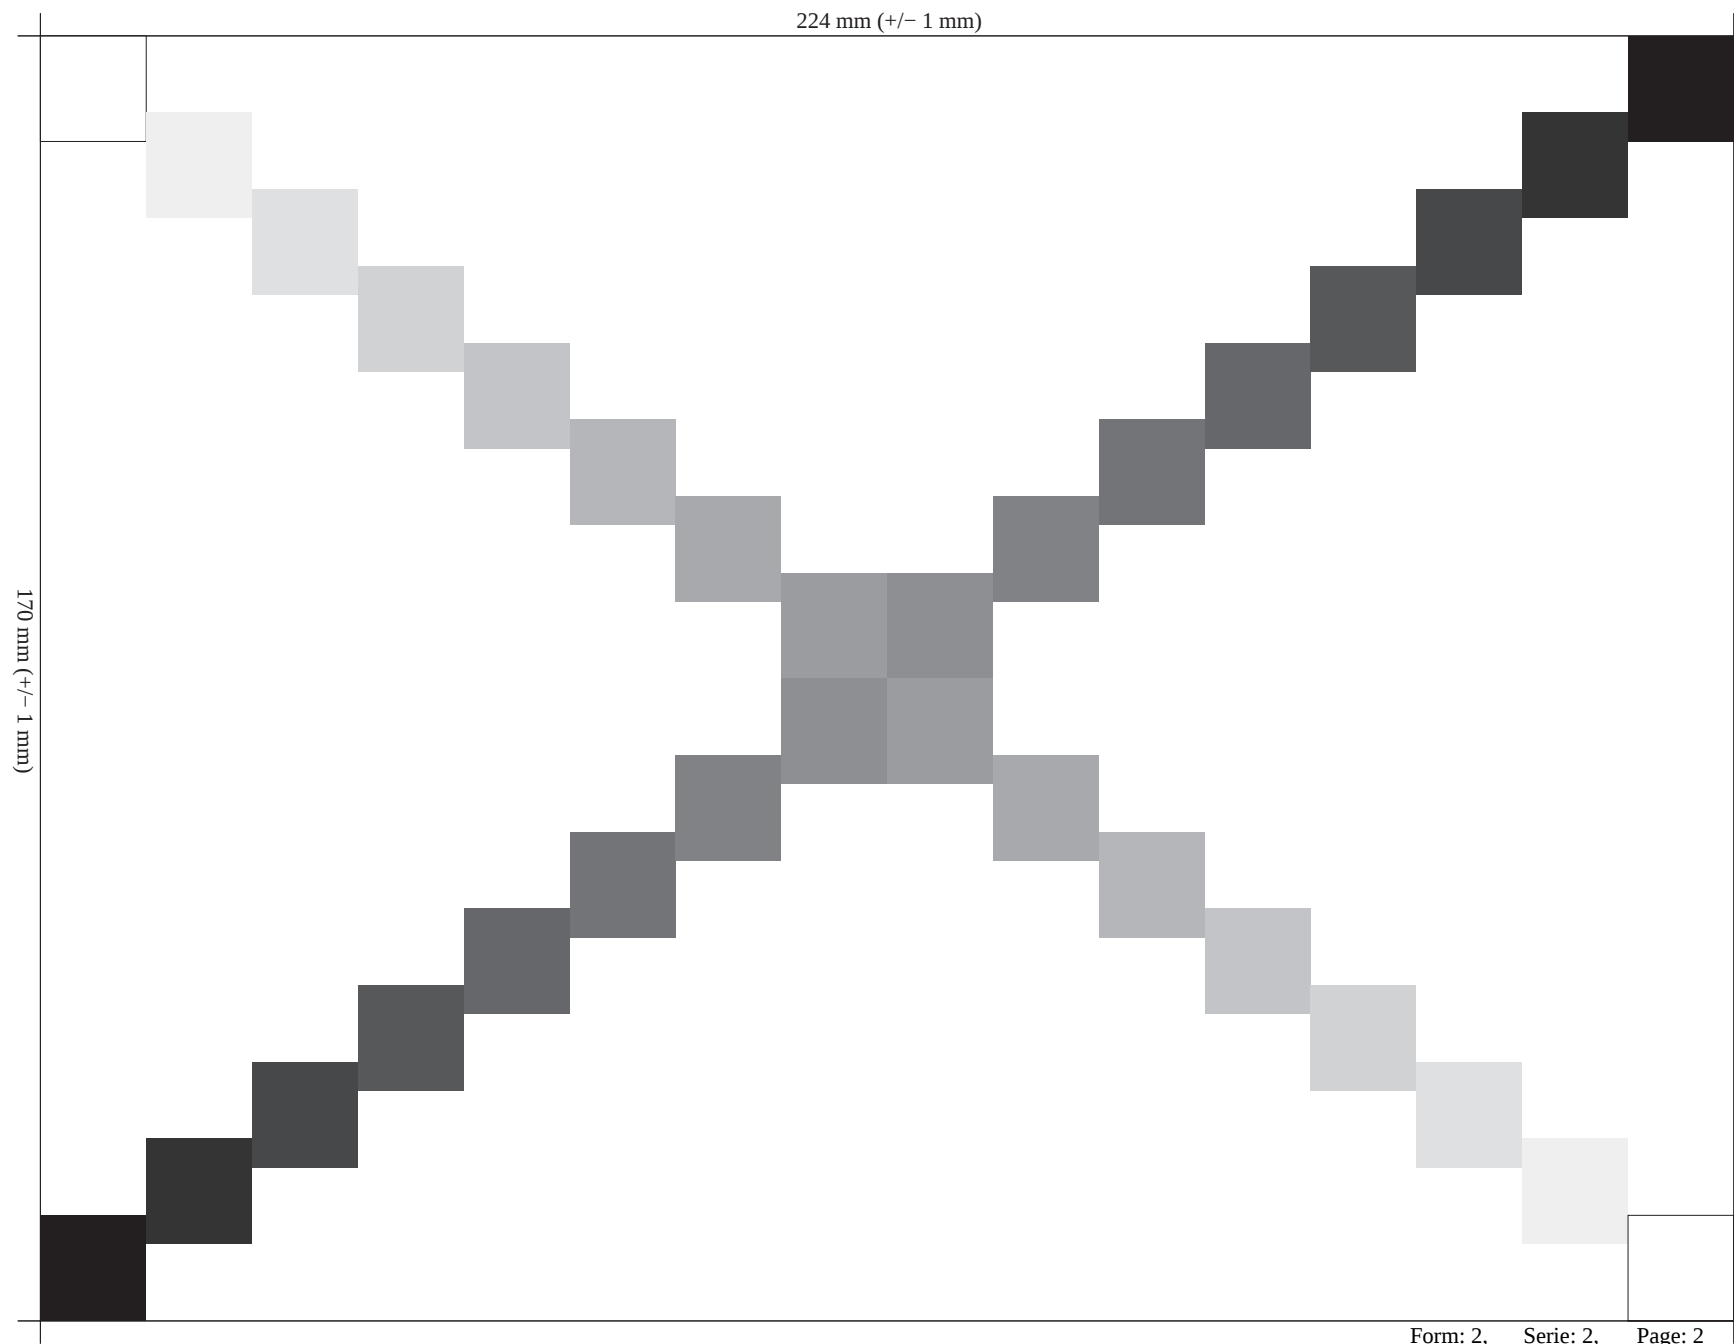

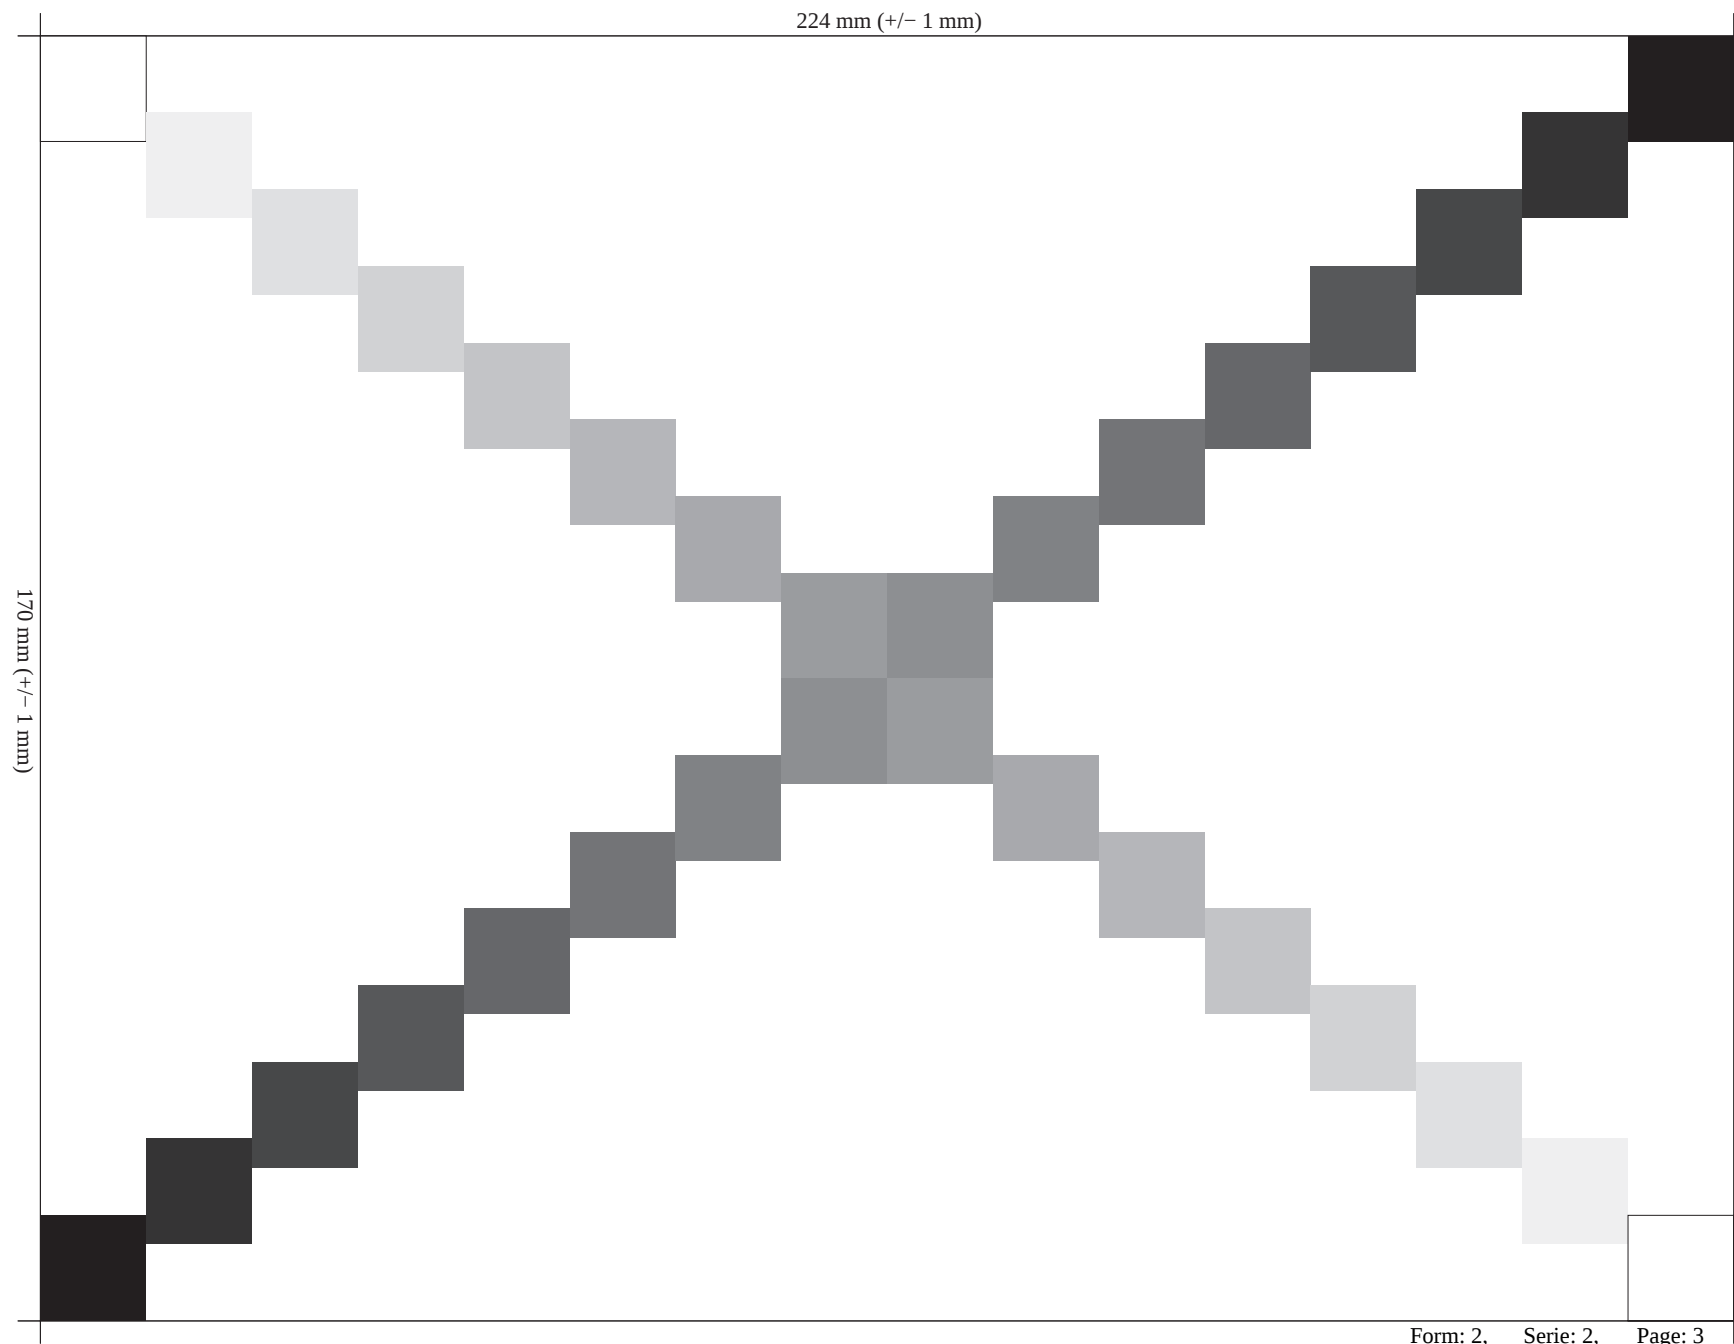


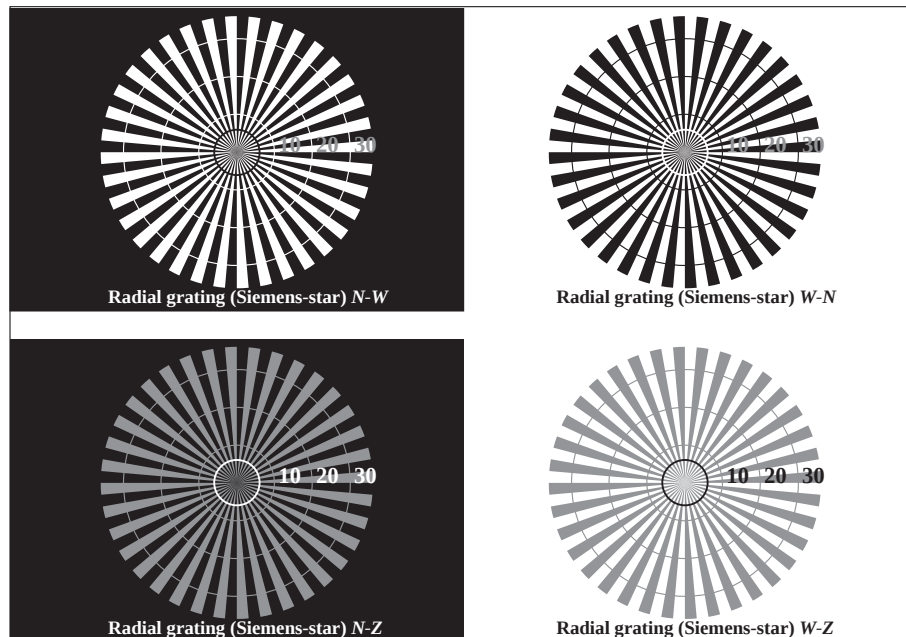

Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS operator: 000n* setcmykcolor

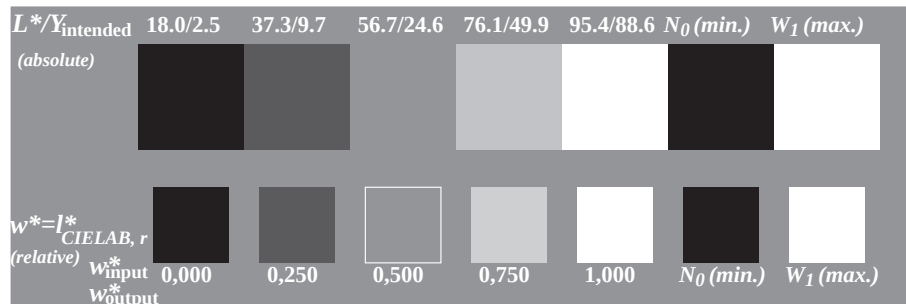

Picture C2: 5 visual equidistant L*-grey steps + N0 + W1; PS operator: 000n* setcmykcolor

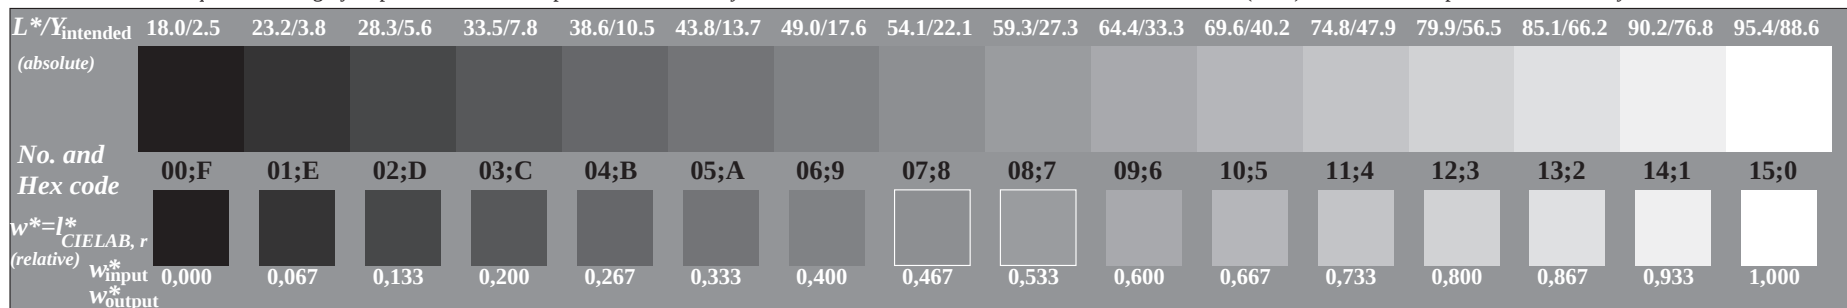


Picture C3: 16 visual equidistant L*-grey steps; PS operator: 000n* setcmykcolor


ISO/IEC 19752-test chart, form 3
Proposal by DIN NI28

2003-05-01, name1 input: 000n* setcmykcolor
Test device type: name2 output: Startup (S) data depend


Form: 3, Serie: 2, Page: 4

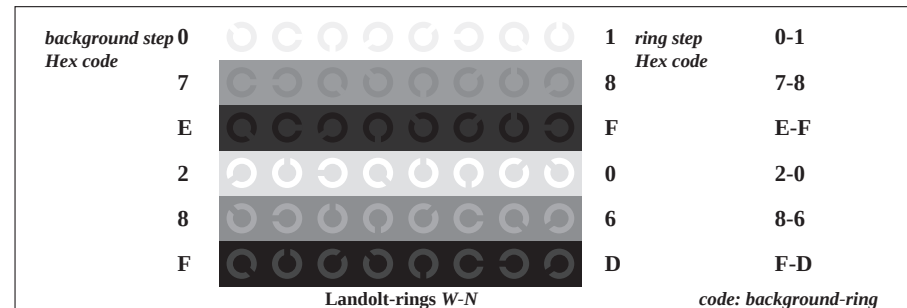

Picture C4: Landolt-rings W-N; PS operator: 000n* setcmykcolor

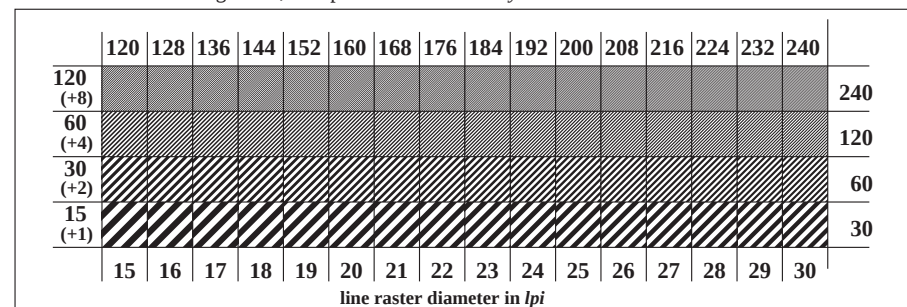

Picture C5: Line raster under 45° (or 135°); PS operator: 000n* setcmykcolor

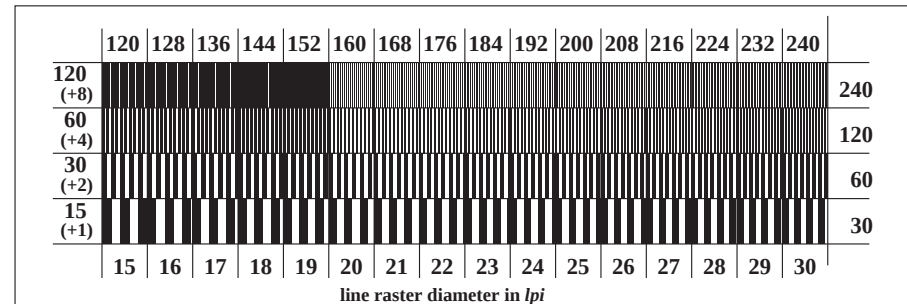

Picture C6: Line raster under 90° (or 0°); Use of the PS operator 000n* setcmykcolor

170 mm (+/- 1 mm)

N 0001*

N 0000*

Fb,0

Eb,1

Db,2

Cb,3

Bb,4

Ab,5

9b,6

8b,7

7b,8

6b,9

5b,10

4b,11

3b,12

2b,13

1b,14

0b,15

Fb,0

Eb,1

Db,2

Cb,3

Bb,4

Ab,5

9b,6

8b,7

7b,8

6b,9

5b,10

4b,11

3b,12

2b,13

1b,14

0b,15

0t,31

1t,30

2t,29

3t,28

4t,27

5t,26

6t,25

7t,24

9t,22

At,21

Bt,20

Ct,19

Dt,18

Et,17

Ft,16

See for similar files: <http://www.ps.bam.de/BE95/>
Technical information: <http://www.ps.bam.de/19752> Version 2.0, io=0,0?

170 mm (+/- 1 mm)


Grey Page

White Page

Black Page

See for similar files: <http://www.ps.bam.de/BE95/>
Technical information: <http://www.ps.bam.de/19752> Version 2.0, io=0,0?

BAM registration: 20030501-BE95/10L/Q95E08SP.PS/.PDF BAM material: code=rh4ta
application for yield test of monochromatic printers

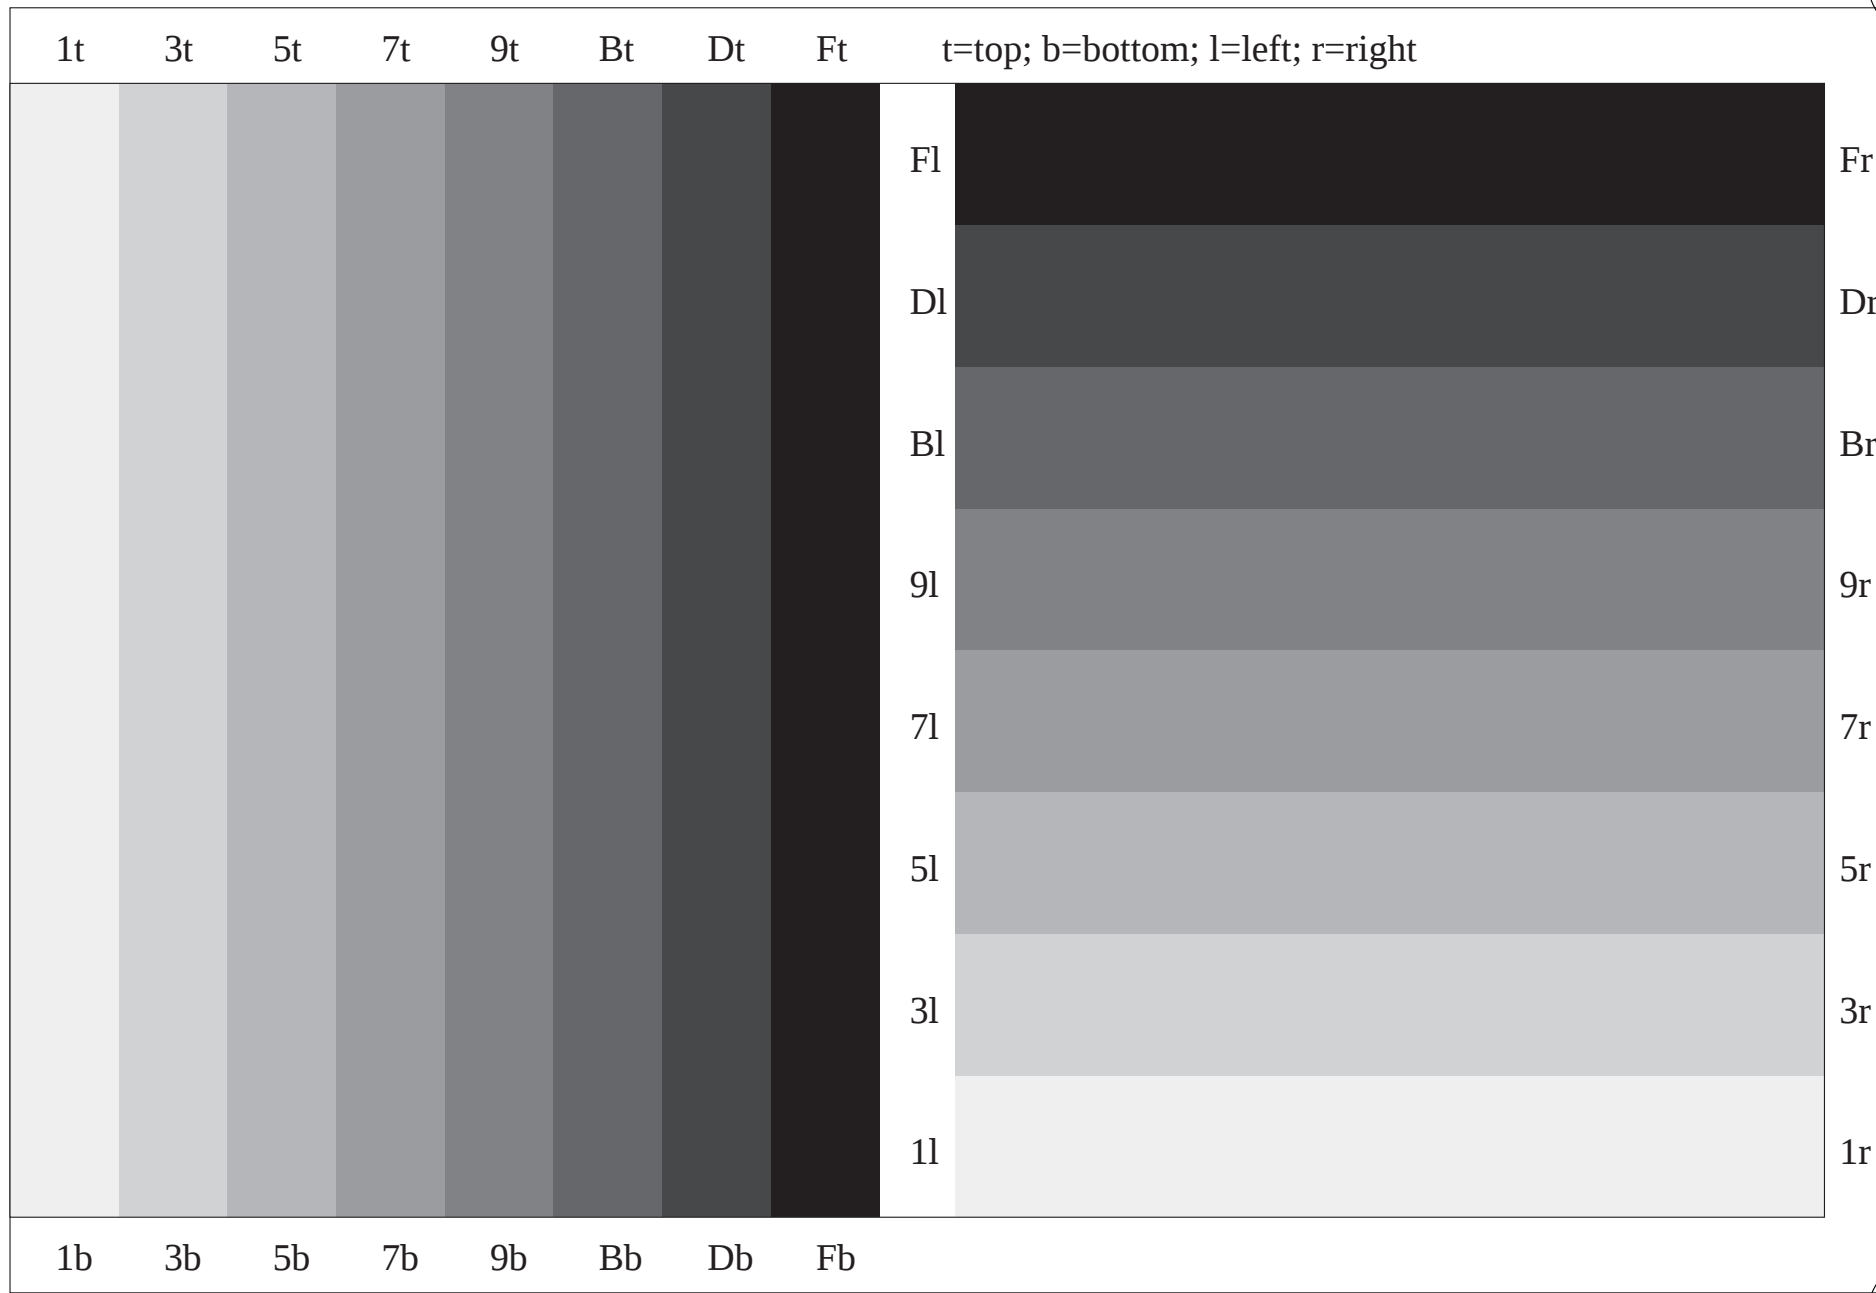

Form 9: Grey rectangles 115 mm x 14.4 mm for yield or emission; PS operator used: 000n* setcmykcolor

ISO/IEC 19752-test chart, form 9
Proposal by DIN NI28

2003-05-01, name1 input: 000n* setcmykcolor
Test device type: name2 output: *Startup (S) data depend*

Form: 9, Serie: 2, Page: 10