



Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS operator:  $w^*$  setgray

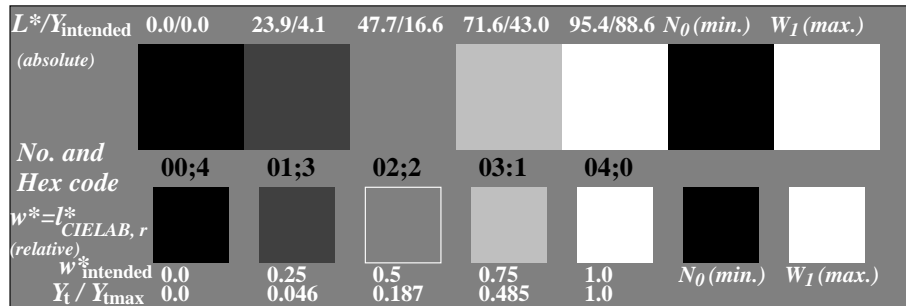

Picture C2: 5 visual equidistant  $L^*$ -grey steps +  $N_0$  +  $W_1$ ; PS operator:  $w^*$  setgray

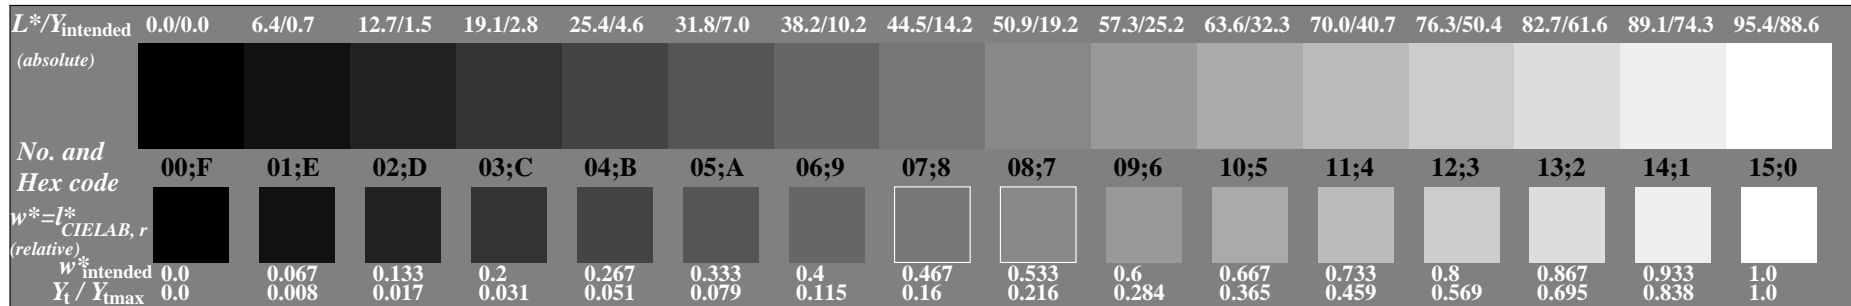


Picture C3: 16 visual equidistant  $L^*$ -grey steps; PS operator:  $w^*$  setgray

ISO 9241-test chart for contrast range  $Y_w:Y_n = 88.6 : 0.0$


Ergonomics – Visual Displays – Field Assessment Methods

input:  $w^*$  setgray


output: no change compared to input

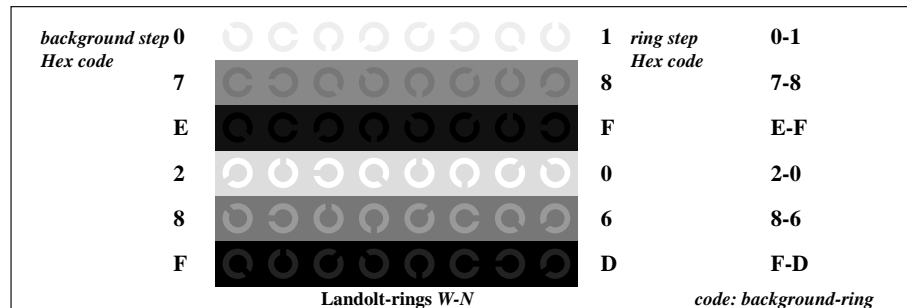

Picture C4: Landolt-rings W-N; PS operator:  $w^*$  setgray

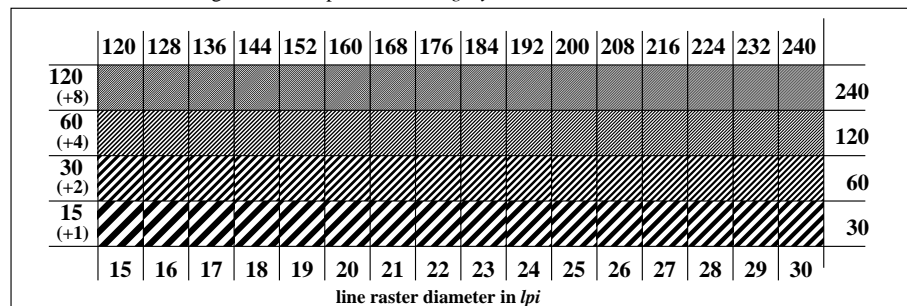

Picture C5: Line raster under 45° (or 135°); PS operator:  $w^*$  setgray

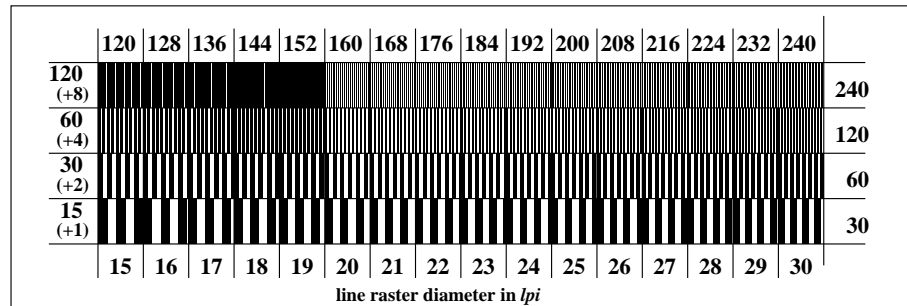

Picture C6: Line raster under 90° (or 0°); PS operator:  $w^*$  setgray