



Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS operator: 000n\* setcmkycolor

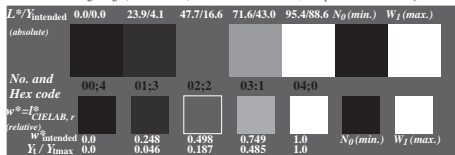


Picture C2: 5 visual equidistant  $L^*$ -grey steps +  $N_0$  +  $W_I$ ; PS operator: 000n\* setcmkycolor

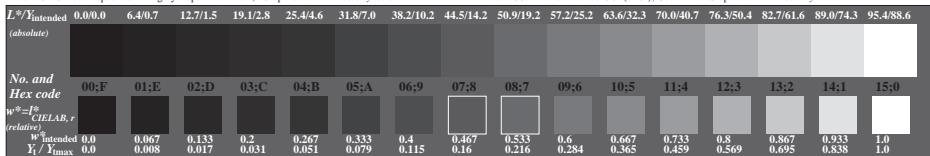


Picture C3: 16 visual equidistant  $L^*$ -grey steps; PS operator: 000n\* setcmkycolor

ISO 9241-test chart for contrast range  $Y_w:Y_n = 88.6 : 0.0$

Ergonomics – Visual Displays – Field Assessment Methods

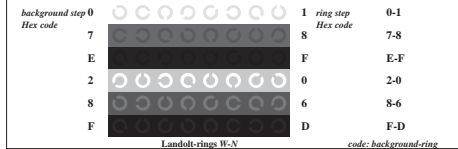

Picture C4: Landolt-rings W-N; PS operator: 000n\* setcmkycolor

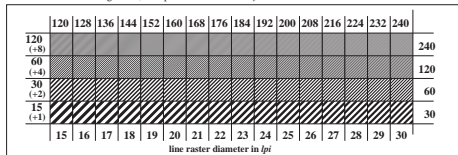

Picture C5: Line raster under 45° (or 135°); PS operator: 000n\* setcmkycolor



Picture C6: Line raster under 90° (or 0°); Use of the PS operator 000n\* setcmkycolor

input: 000n\* setcmkycolor

output: no change compared to input