



See for similar files: <http://www.ps.bam.de/CE77/>  
Technical information: <http://www.ps.bam.de/9241>

Version 2.0, io=2.2, CIE LAB, 1.0 exp


BAM registration: 20040101-CE77/10L/L77E00NP.PS/.PDF BAM material: code=rh4ta  
Application for achromatic display output with CIE LAB contrast range  $L^*:W:L^*\eta = 95.4 : 0.0$

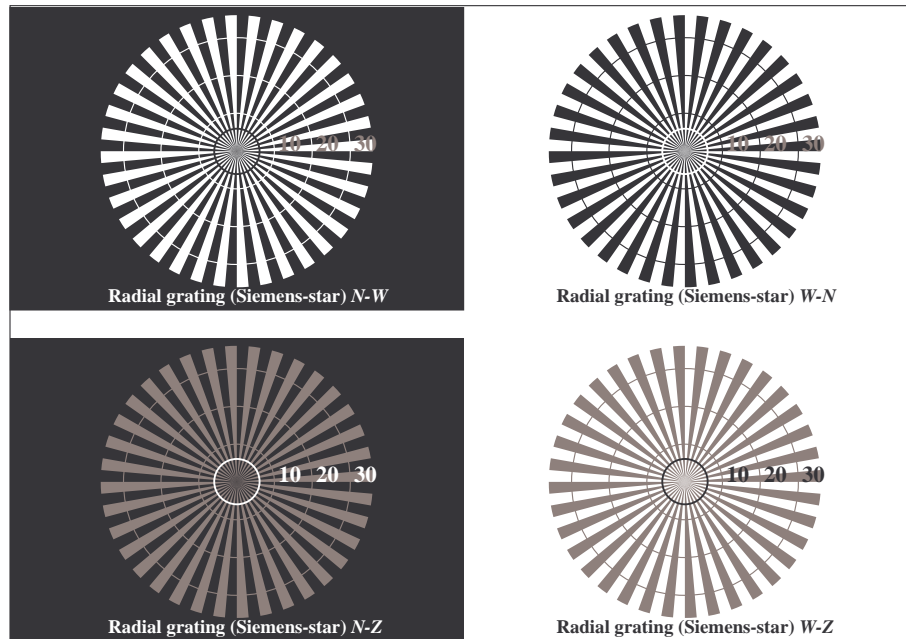

Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS operator: *nnn0\* setcmykcolor*

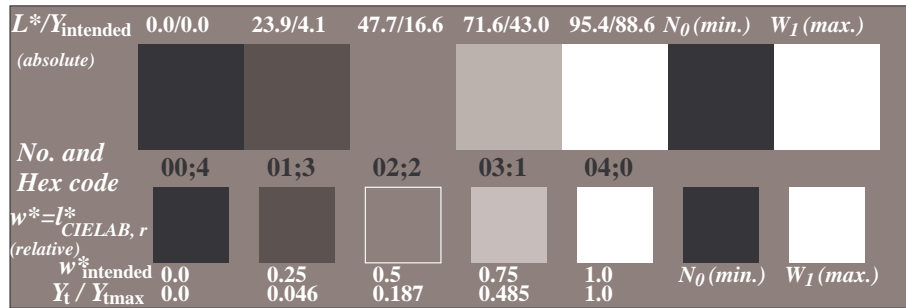

Picture C2: 5 visual equidistant  $L^*$ -grey steps +  $N_0$  +  $W_1$ ; PS operator: *cmv0\* setcmykcolor*

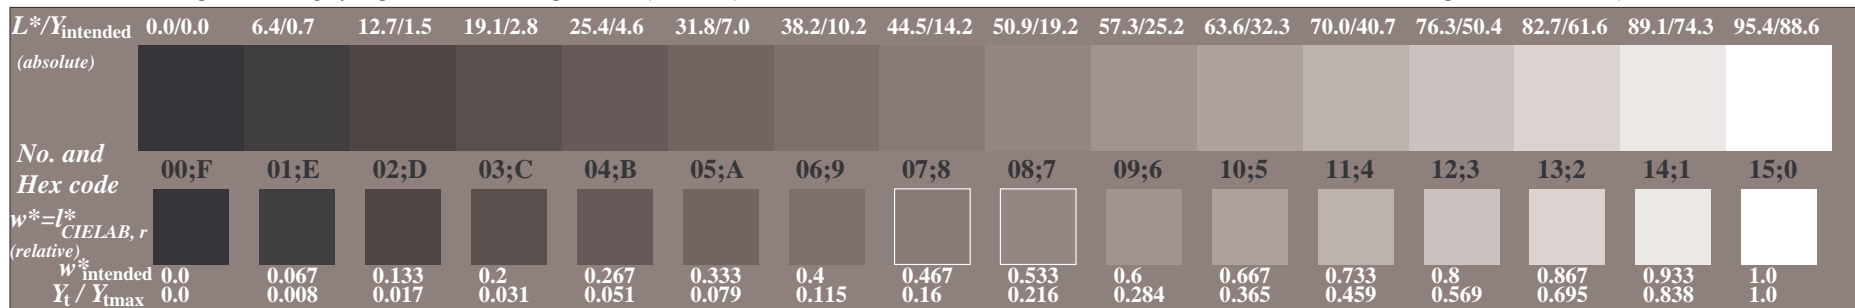


Picture C3: 16 visual equidistant  $L^*$ -grey steps; PS operator: *nnn0\* setcmykcolor*

ISO 9241-test chart for contrast range  $Y_w:Y_n = 88.6 : 0.0$


Ergonomics – Visual Displays – Field Assessment Methods

input: *nnn0\* setcmykcolor*


output: *no change compared to input*

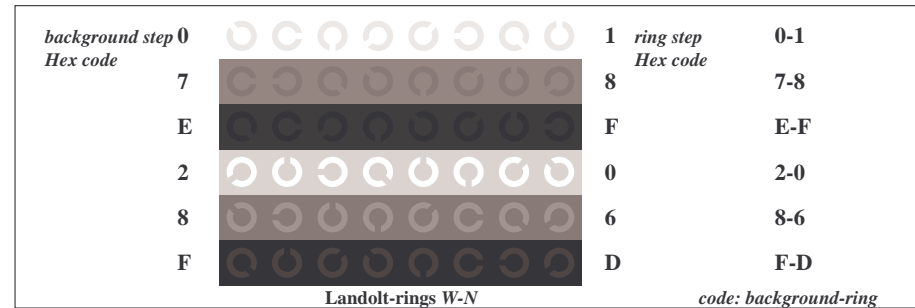

Picture C4: Landolt-rings W-N; PS operator: *nnn0\* setcmykcolor*

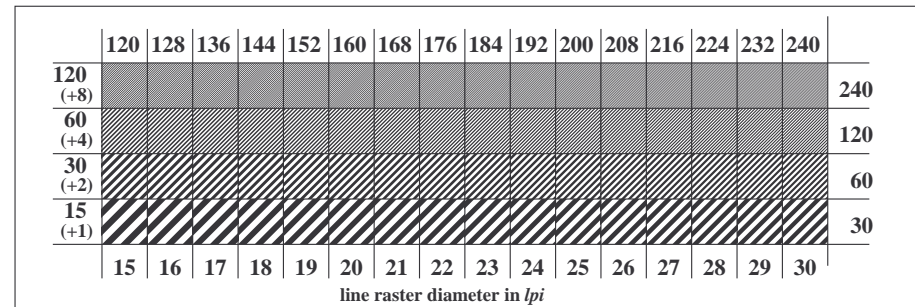

Picture C5: Line raster under 45° (or 135°); PS operator: *nnn0\* setcmykcolor*

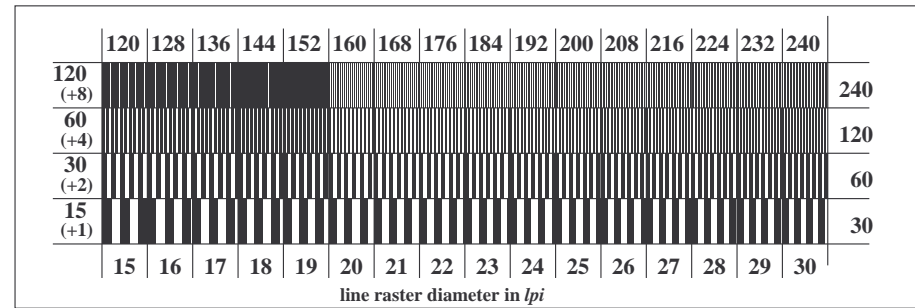

Picture C6: Line raster under 90° (or 0°); Use of the PS operator *nnn0\* setcmykcolor*