



Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS operator: *nnn0\* setcmykcolor*

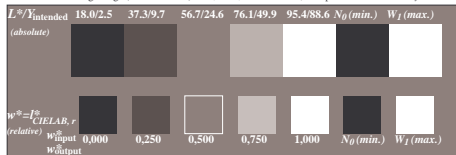


Picture C2: 5 visual equidistant  $L^*$ -grey steps +  $N_0$  +  $W_1$ ; PS operator: *cmv0\* setcmykcolor*

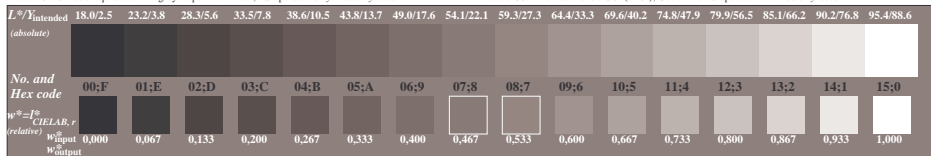


Picture C3: 16 visual equidistant  $L^*$ -grey steps; PS operator: *nnn0\* setcmykcolor*


ISO/IEC 19752-test chart, form 3  
Proposal by DIN N128

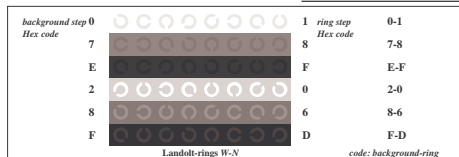

Picture C4: Landolt-rings W-N; PS operator: *nnn0\* setcmykcolor*

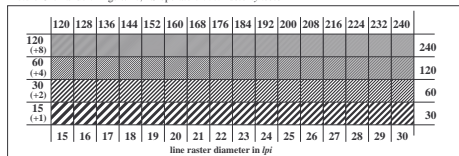

Picture C5: Line raster under 45° (or 135°); PS operator: *nnn0\* setcmykcolor*

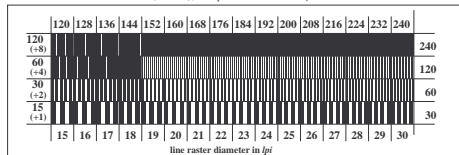

Picture C6: Line raster under 90° (or 0°); Use of the PS operator *nnn0\* setcmykcolor*

2003-05-01, name1 input: *nnn0\* setcmykcolor*  
Test device type: name2 output: *cmv0\*/nnn0\* setcmykcolor*