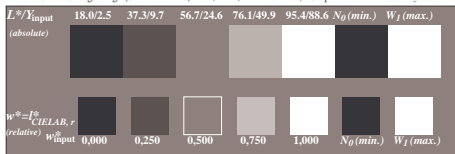
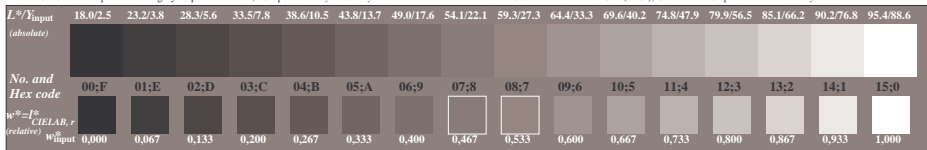
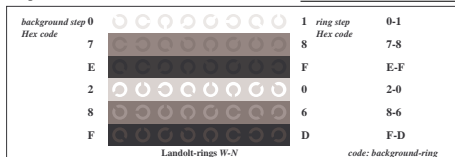
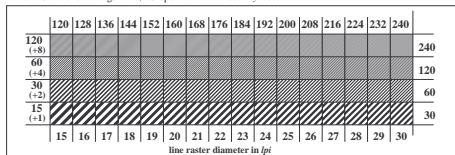
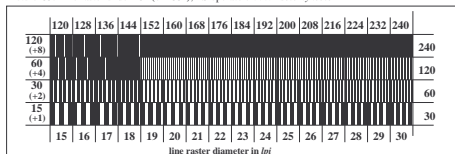
Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS operator: *nnn0* setcmkycolor*Picture C2: 5 visual equidistant L^* -grey steps + N_0 + W_1 ; PS operator: *cmv0* setcmkycolor*Picture C3: 16 visual equidistant L^* -grey steps; PS operator: *nnn0* setcmkycolor*ISO/IEC 19752-test chart, form 3
Proposal by DIN N1282003-05-01, name1 input: *nnn0* setcmkycolor*
Test device type: name2 output: *no change compared to input*

Form: 3, Series: 1, Page: 1

Picture C4: Landolt-rings W-N; PS operator: *nnn0* setcmkycolor*Picture C5: Line raster under 45° (or 135°); PS operator: *nnn0* setcmkycolor*Picture C6: Line raster under 90° (or 0°); Use of the PS operator *nnn0* setcmkycolor*