





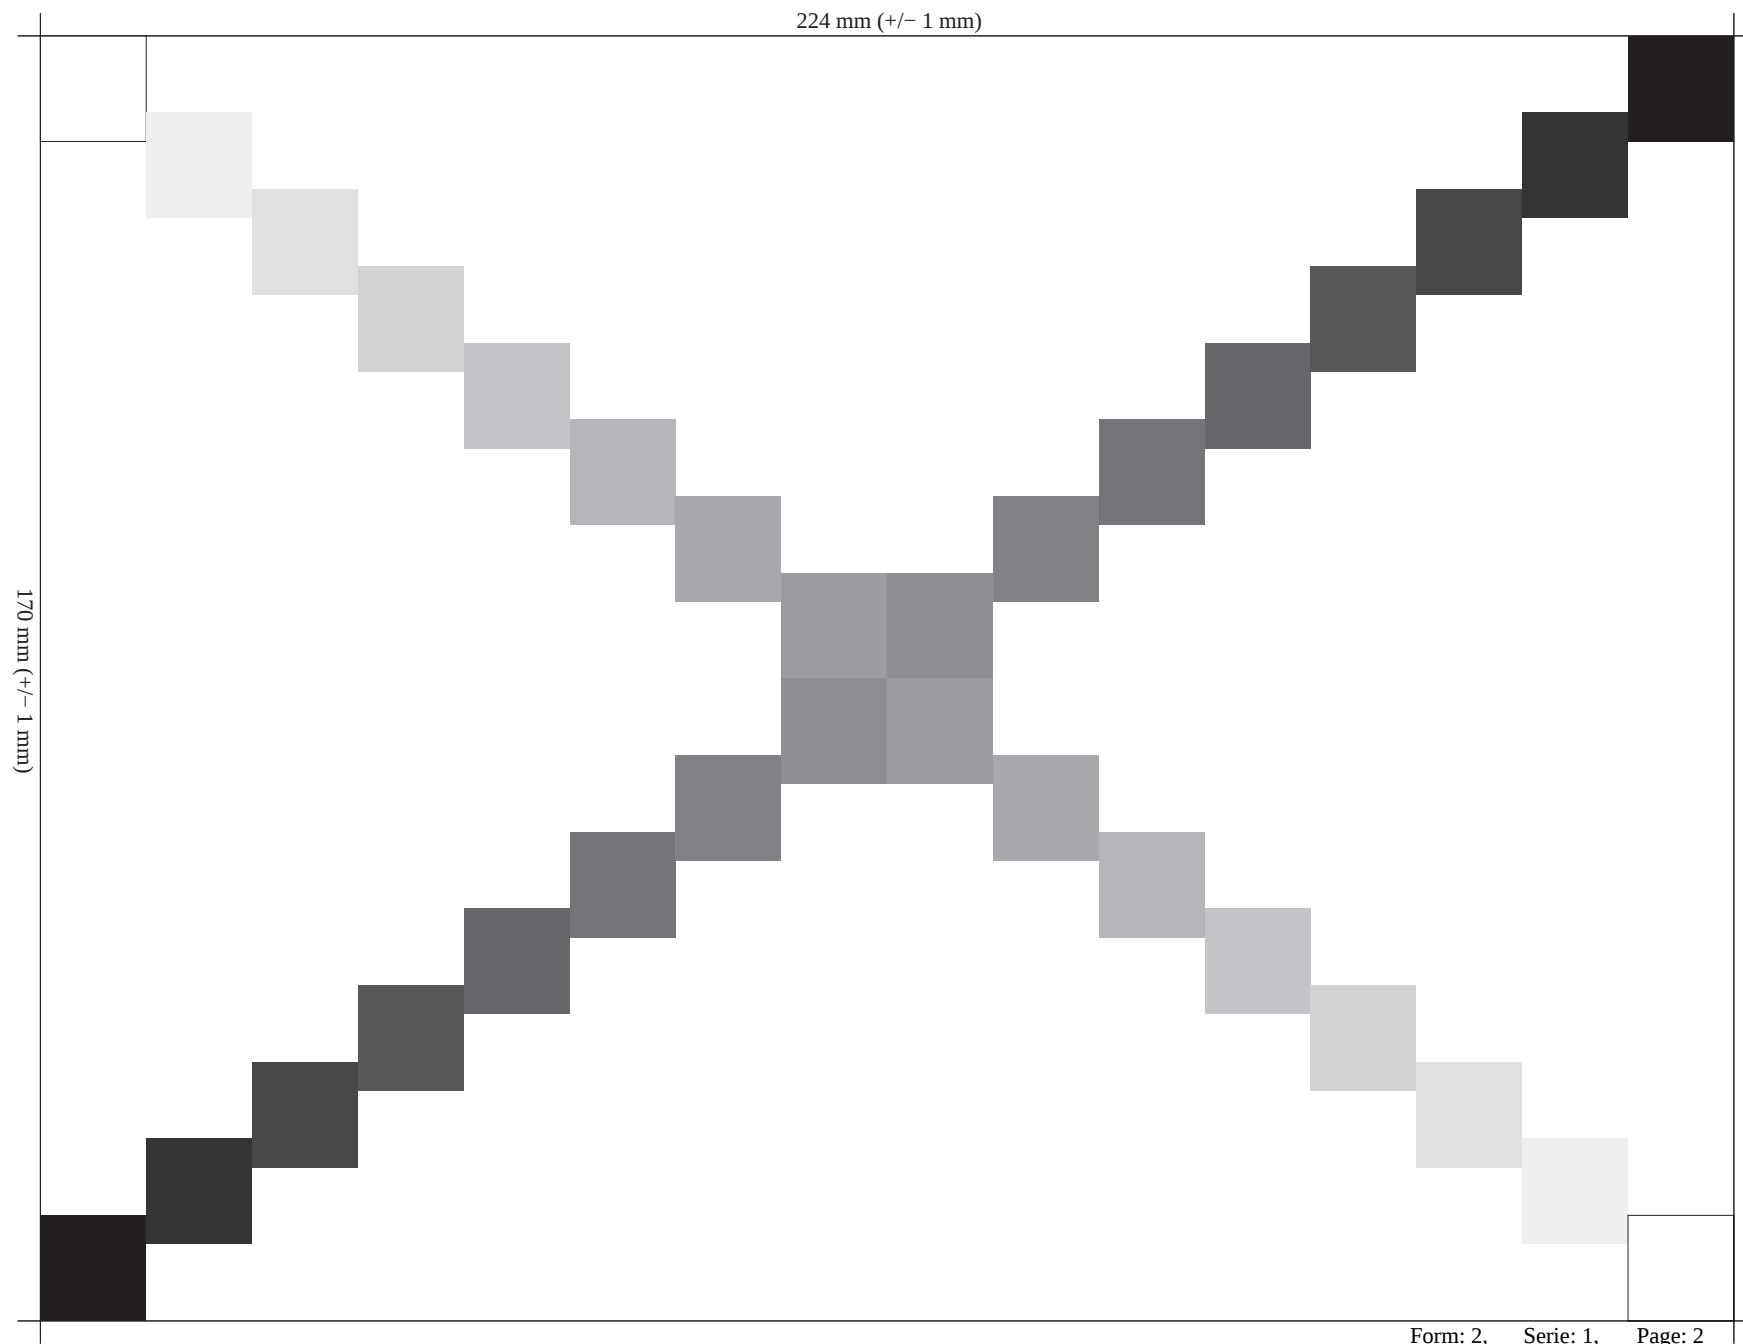

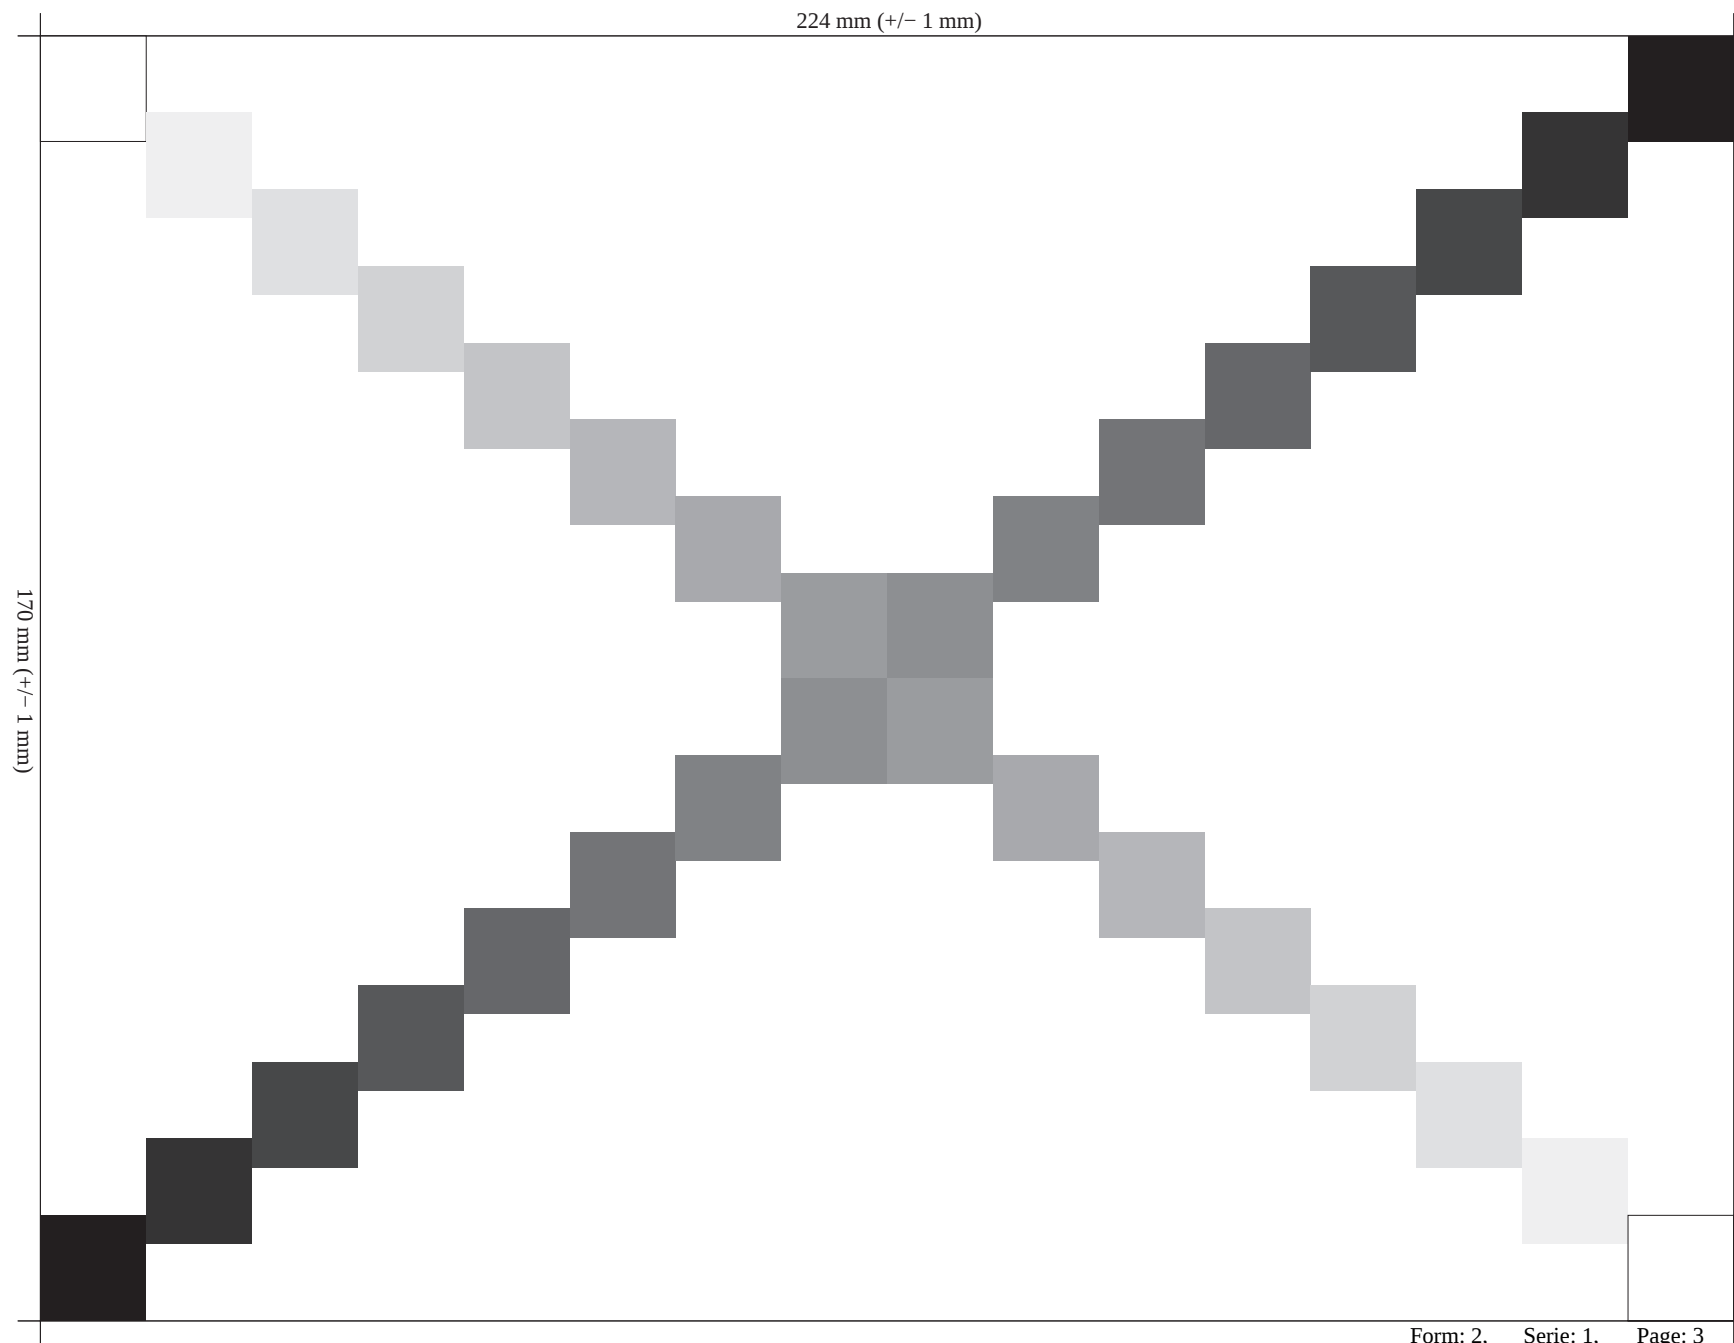


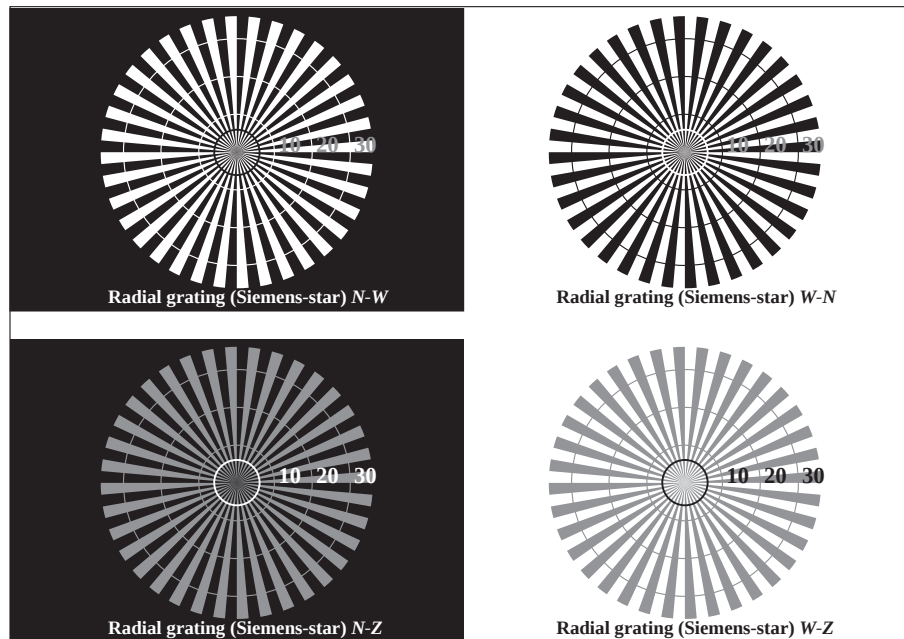

Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS operator: 000n* setcmykcolor

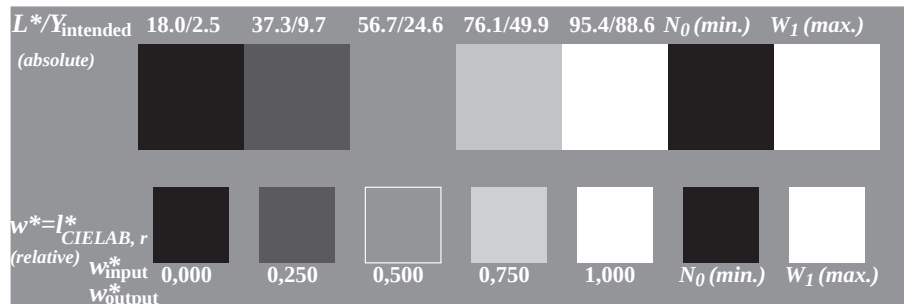

Picture C2: 5 visual equidistant L^* -grey steps + N_0 + W_1 ; PS operator: 000n* setcmykcolor

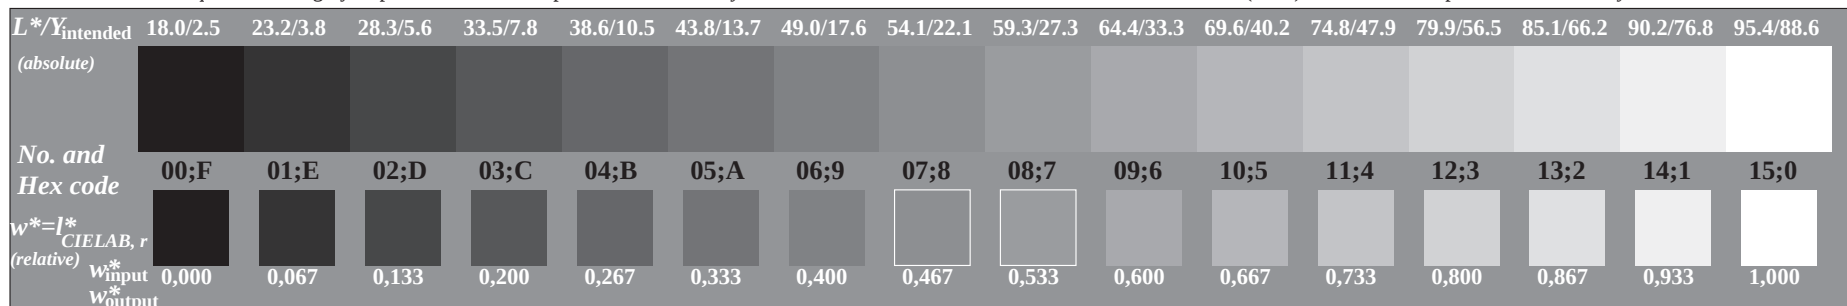


Picture C3: 16 visual equidistant L^* -grey steps; PS operator: 000n* setcmykcolor


ISO/IEC 19752-test chart, form 3
Proposal by DIN NI28

2003-05-01, name1 input: 000n* setcmykcolor
Test device type: name2 output: Startup (S) data depend


Form: 3, Serie: 1, Page: 4

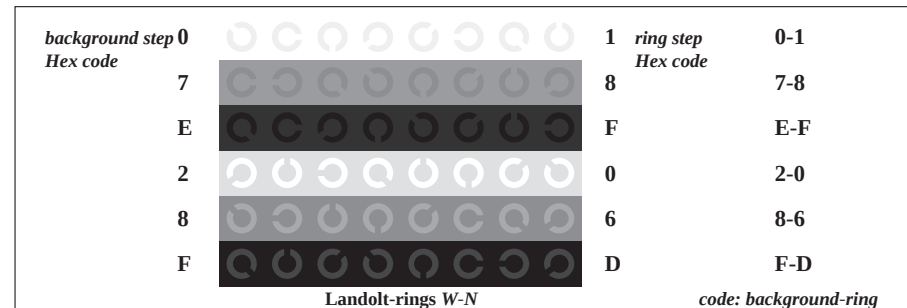

Picture C4: Landolt-rings W-N; PS operator: 000n* setcmykcolor

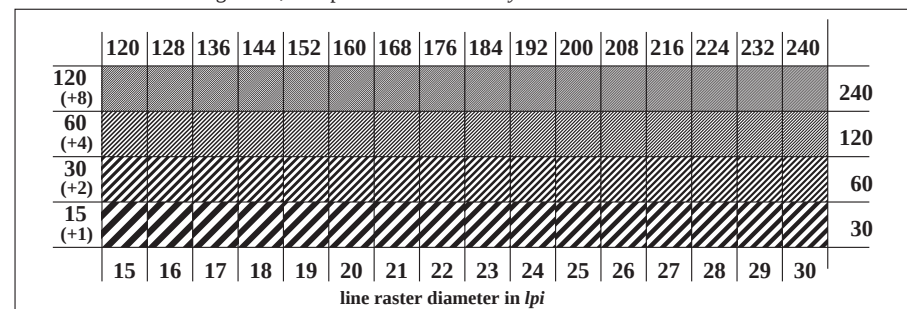

Picture C5: Line raster under 45° (or 135°); PS operator: 000n* setcmykcolor

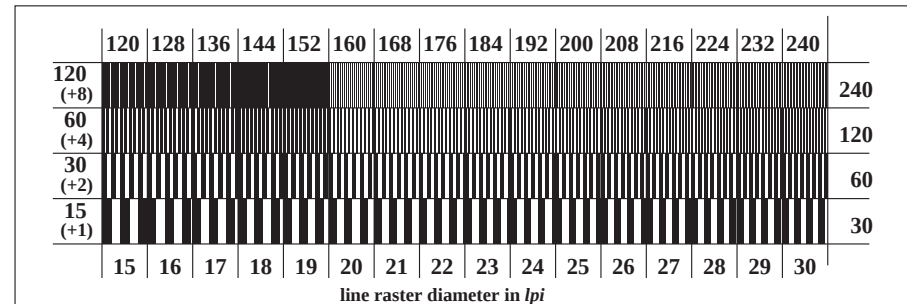

Picture C6: Line raster under 90° (or 0°); Use of the PS operator 000n* setcmykcolor

170 mm (+/- 1 mm)

N 0000*

N 0001*

170 mm (+/- 1 mm)

See for similar files: <http://www.ps.bam.de/CE95/CE95.HTM>
Technical information: <http://www.ps.bam.de/19752> Version 2.0, io=0,0?

BAM registration: 20030501-CE95/10L/L95E04SP.PS/.PDF BAM material: code=rh4ta
application for yield test of monochromatic printers


Grey Page

White Page

Black Page

See for similar files: <http://www.ps.bam.de/CE95/CE95.HTM>
Technical information: <http://www.ps.bam.de/19752> Version 2.0, io=0,0?

BAM registration: 20030501-CE95/10L/L95E08SP.PS/.PDF BAM material: code=rh4ta
application for yield test of monochromatic printers

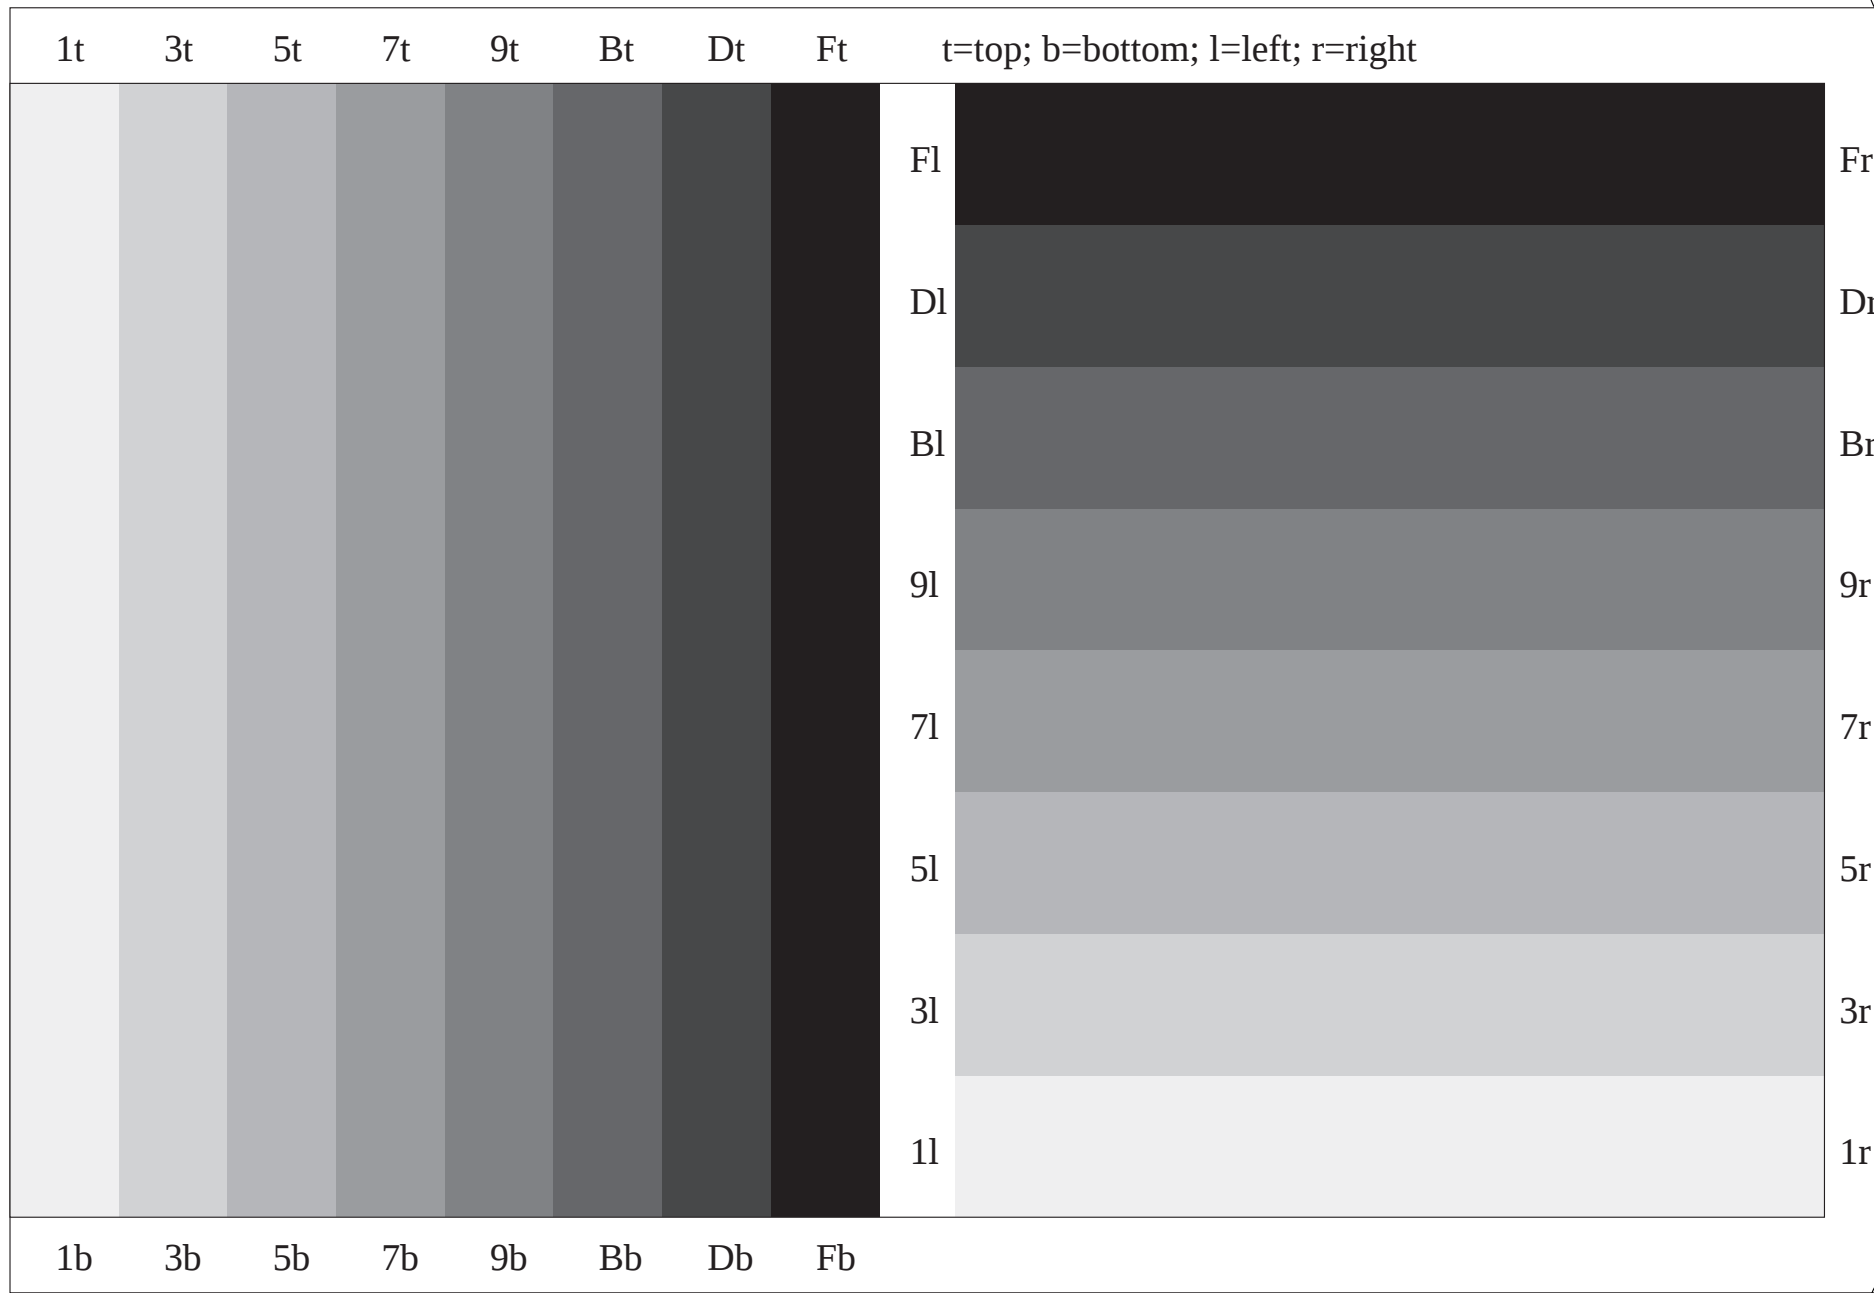

Form 9: Grey rectangles 115 mm x 14.4 mm for yield or emission; PS operator used: 000n* setcmykcolor

ISO/IEC 19752-test chart, form 9
Proposal by DIN NI28

2003-05-01, name1


input: 000n* setcmykcolor


Test device type: name2 output: *Startup (S) data depend*


Form: 9,

Serie: 1,


Page: 10

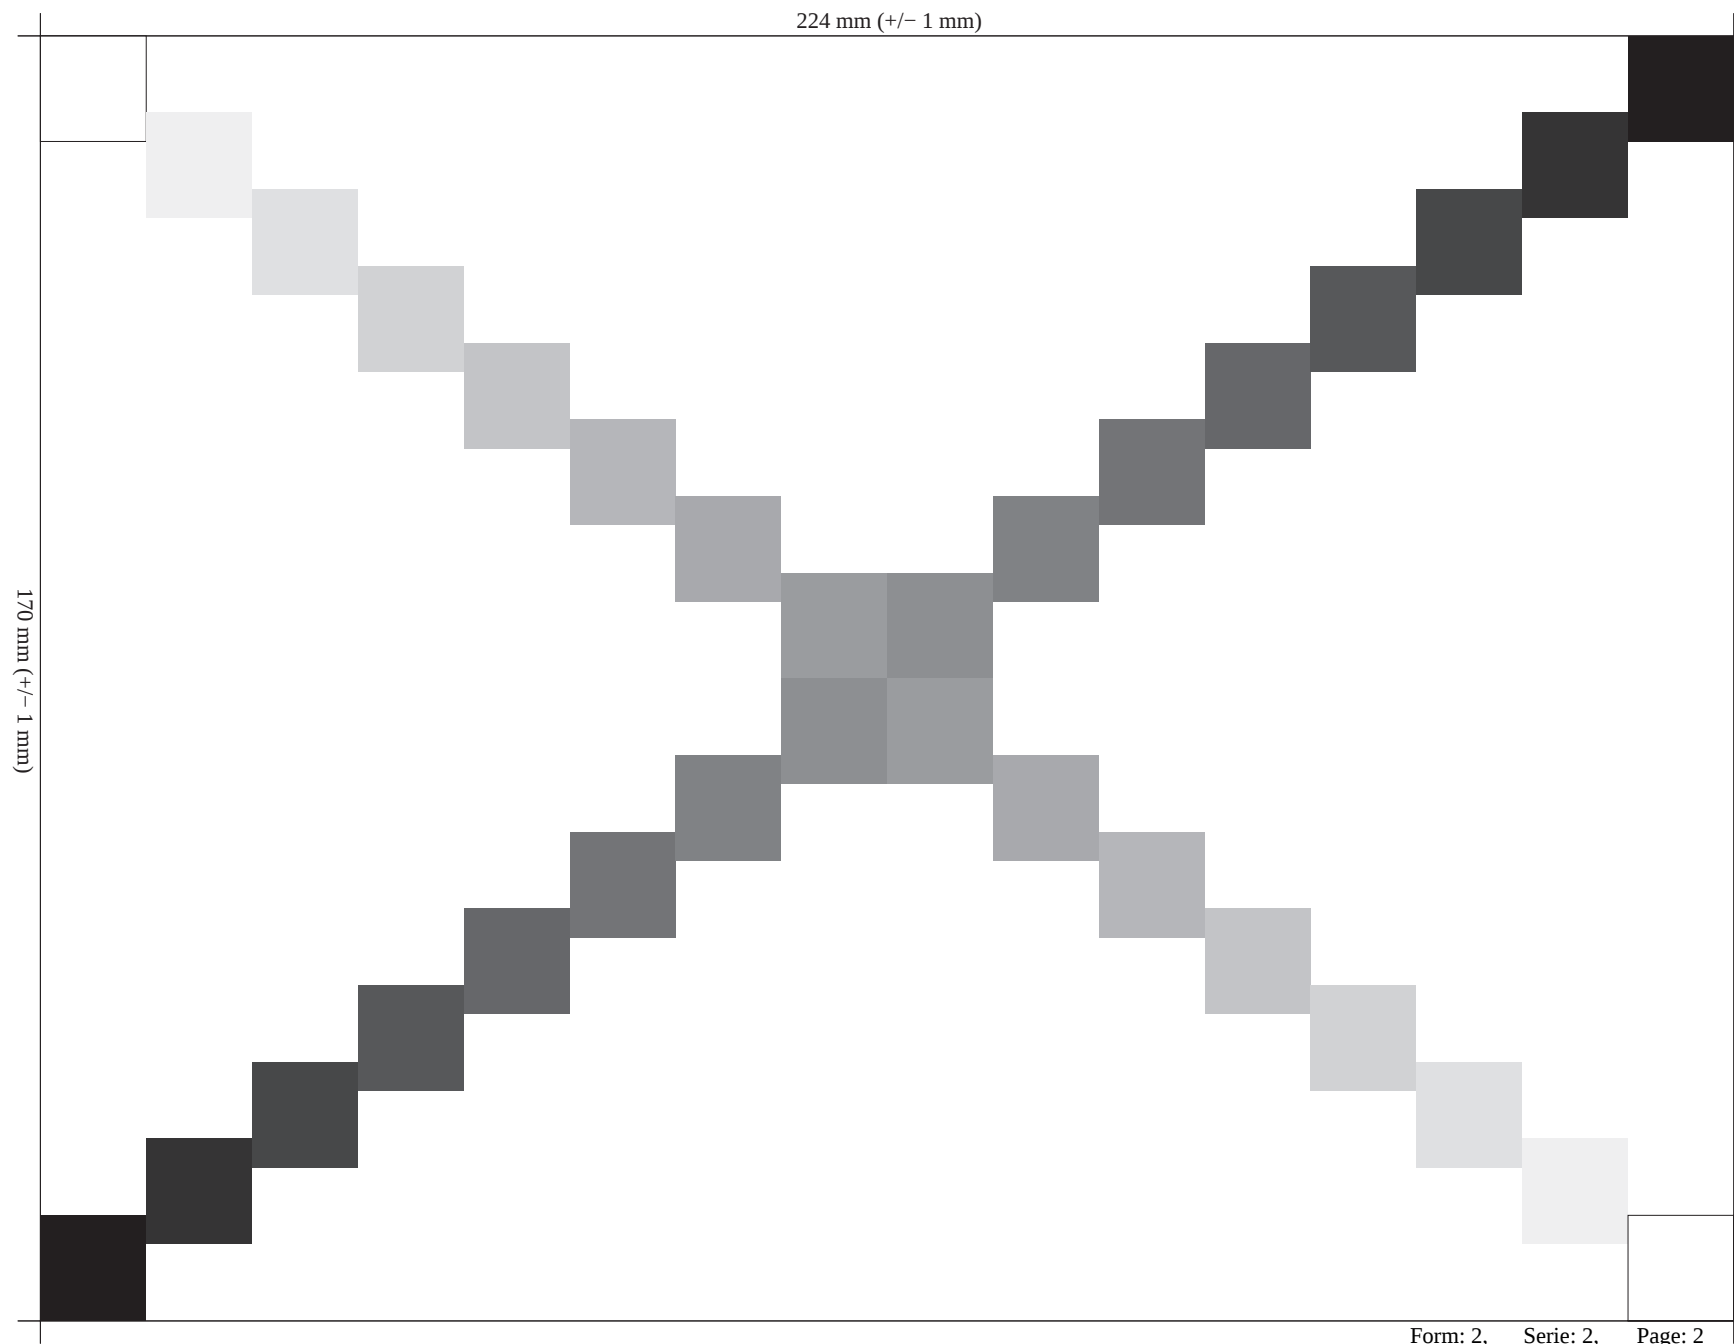

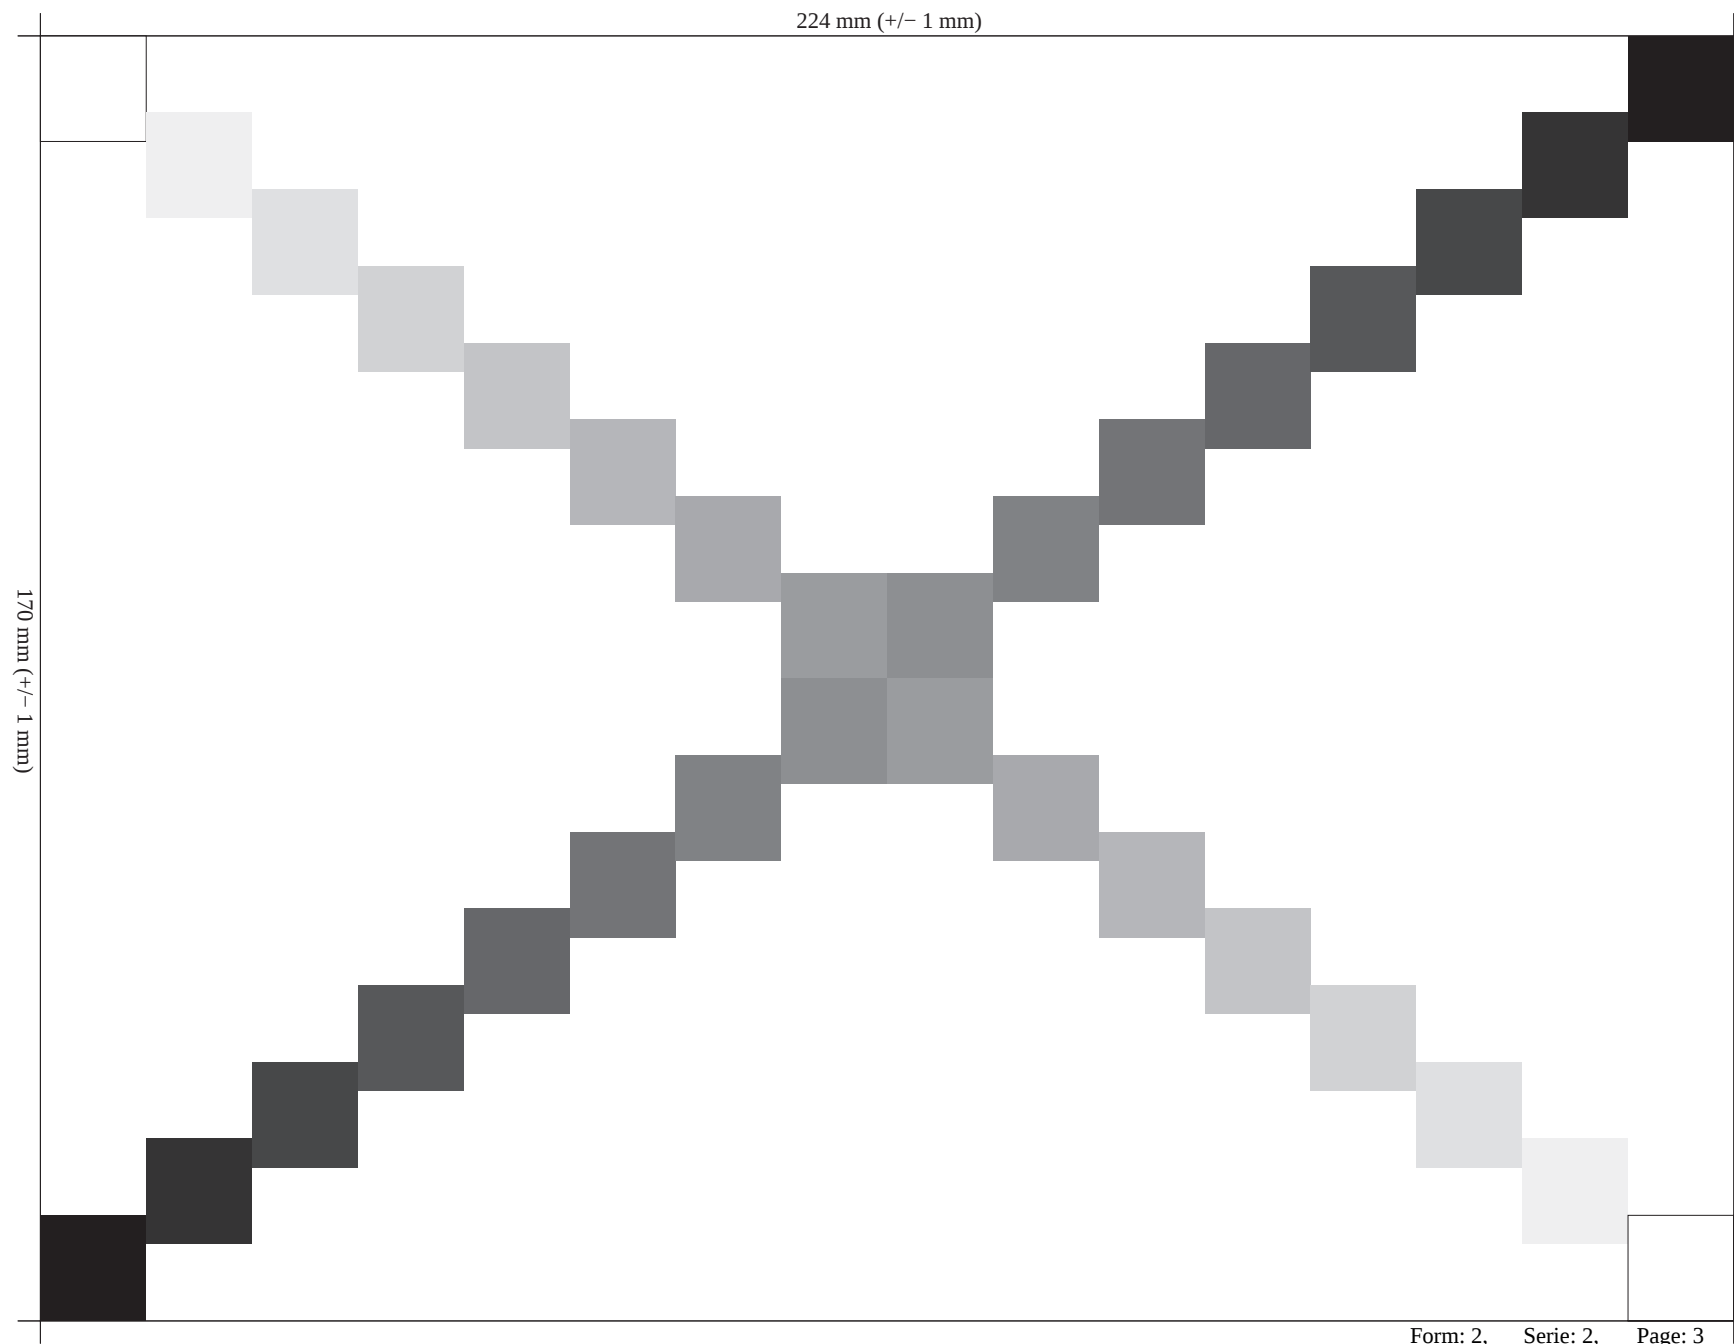


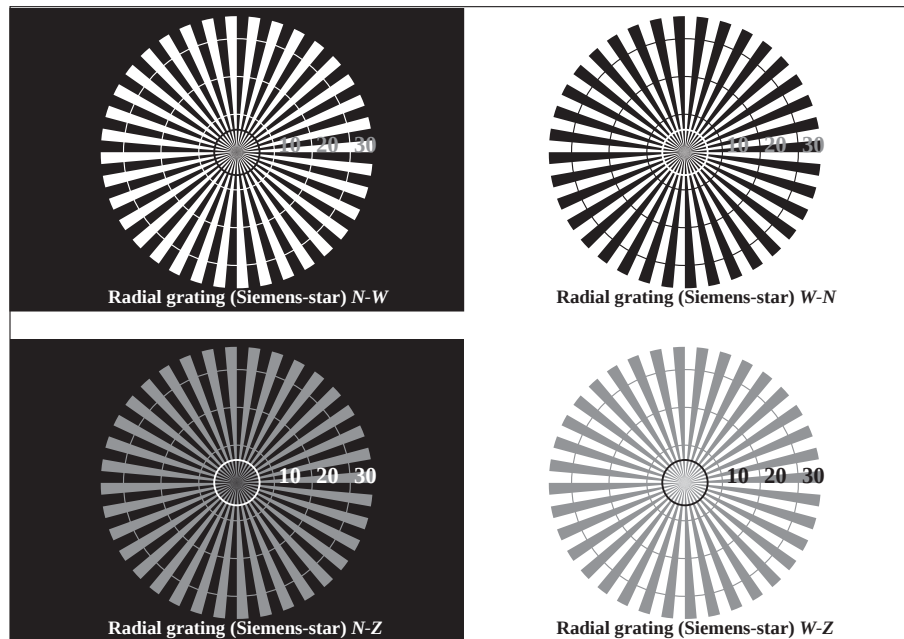

Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS operator: 000n* setcmykcolor

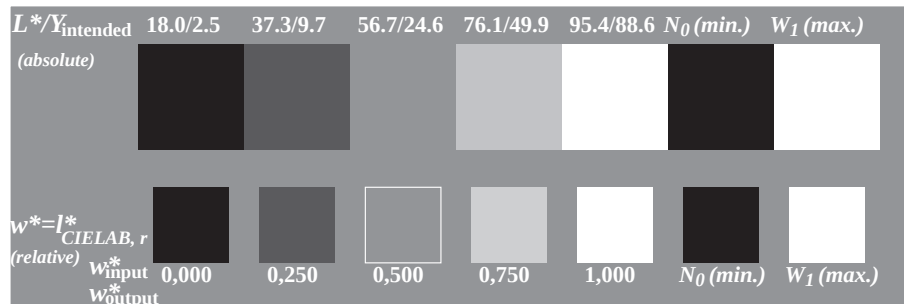

Picture C2: 5 visual equidistant L*-grey steps + N0 + W1; PS operator: 000n* setcmykcolor

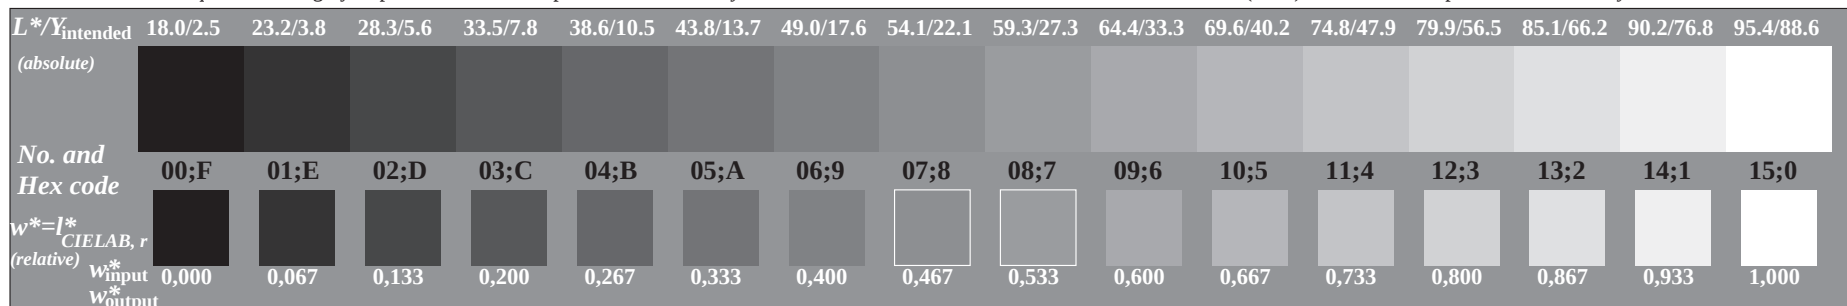


Picture C3: 16 visual equidistant L*-grey steps; PS operator: 000n* setcmykcolor


ISO/IEC 19752-test chart, form 3
Proposal by DIN NI28

2003-05-01, name1 input: 000n* setcmykcolor
Test device type: name2 output: Startup (S) data depend


Form: 3, Serie: 2, Page: 4

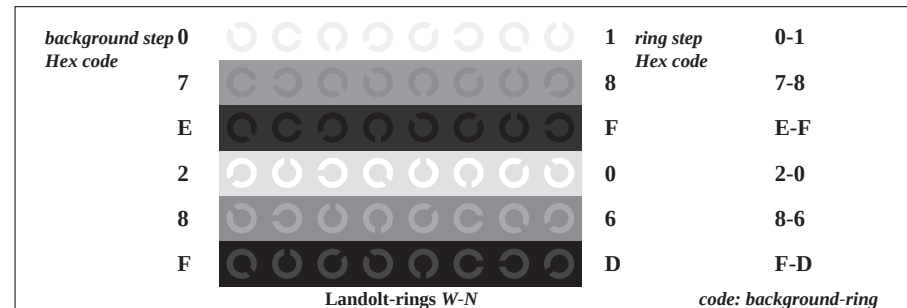

Picture C4: Landolt-rings W-N; PS operator: 000n* setcmykcolor

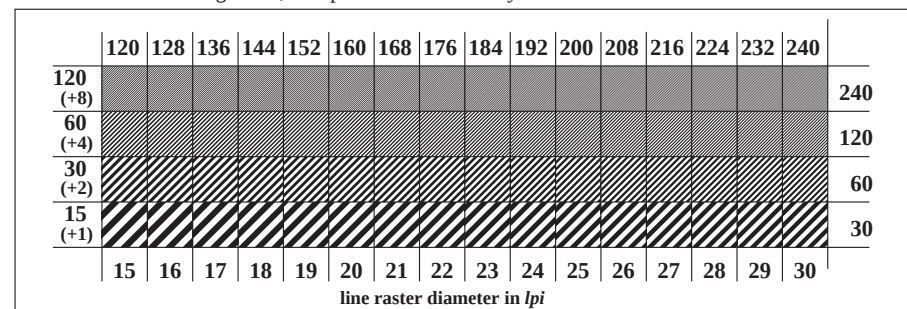

Picture C5: Line raster under 45° (or 135°); PS operator: 000n* setcmykcolor

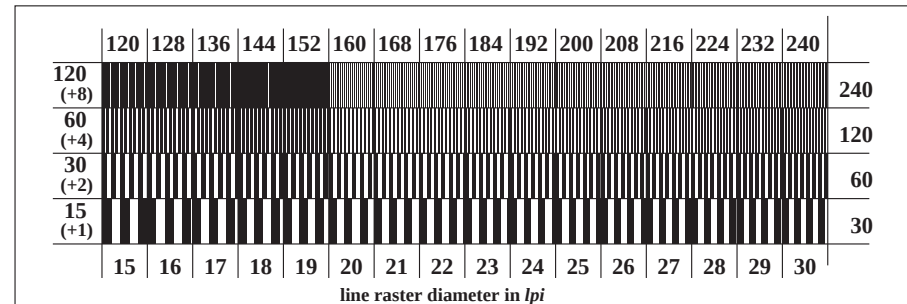

Picture C6: Line raster under 90° (or 0°); Use of the PS operator 000n* setcmykcolor

N 0000*

0t,31

1t,30

2t,29

3t,28

4t,27

5t,26

6t,25

7t,24

8t,23

9t,22

At,21

Bt,20

Ct,19

Dt,18

Et,17

Ft,16

170 mm (+/- 1 mm)

Fb,0

Eb,1

Db,2

Cb,3

Bb,4

Ab,5

9b,6

8b,7

7b,8

6b,9

5b,10

4b,11

3b,12

2b,13

1b,14

0b,15

N 0001*

170 mm (+/- 1 mm)

See for similar files: <http://www.ps.bam.de/CE95/CE95.HTM>
Technical information: <http://www.ps.bam.de/19752> Version 2.0, io=0,0?

BAM registration: 20030501-CE95/10L/L95E04SP.PS/.PDF BAM material: code=rh4ta
application for yield test of monochromatic printers

Grey Page

White Page


See for similar files: <http://www.ps.bam.de/CE95/CE95.HTM>
Technical information: <http://www.ps.bam.de/19752> Version 2.0, io=0,0?

BAM registration: 20030501-CE95/10L/L95E06SP.PS/.PDF BAM material: code=rh4ta
application for yield test of monochromatic printers

Black Page

See for similar files: <http://www.ps.bam.de/CE95/CE95.HTM>
Technical information: <http://www.ps.bam.de/19752> Version 2.0, io=0,0?

BAM registration: 20030501-CE95/10L/L95E08SP.PS/.PDF BAM material: code=rh4ta
application for yield test of monochromatic printers

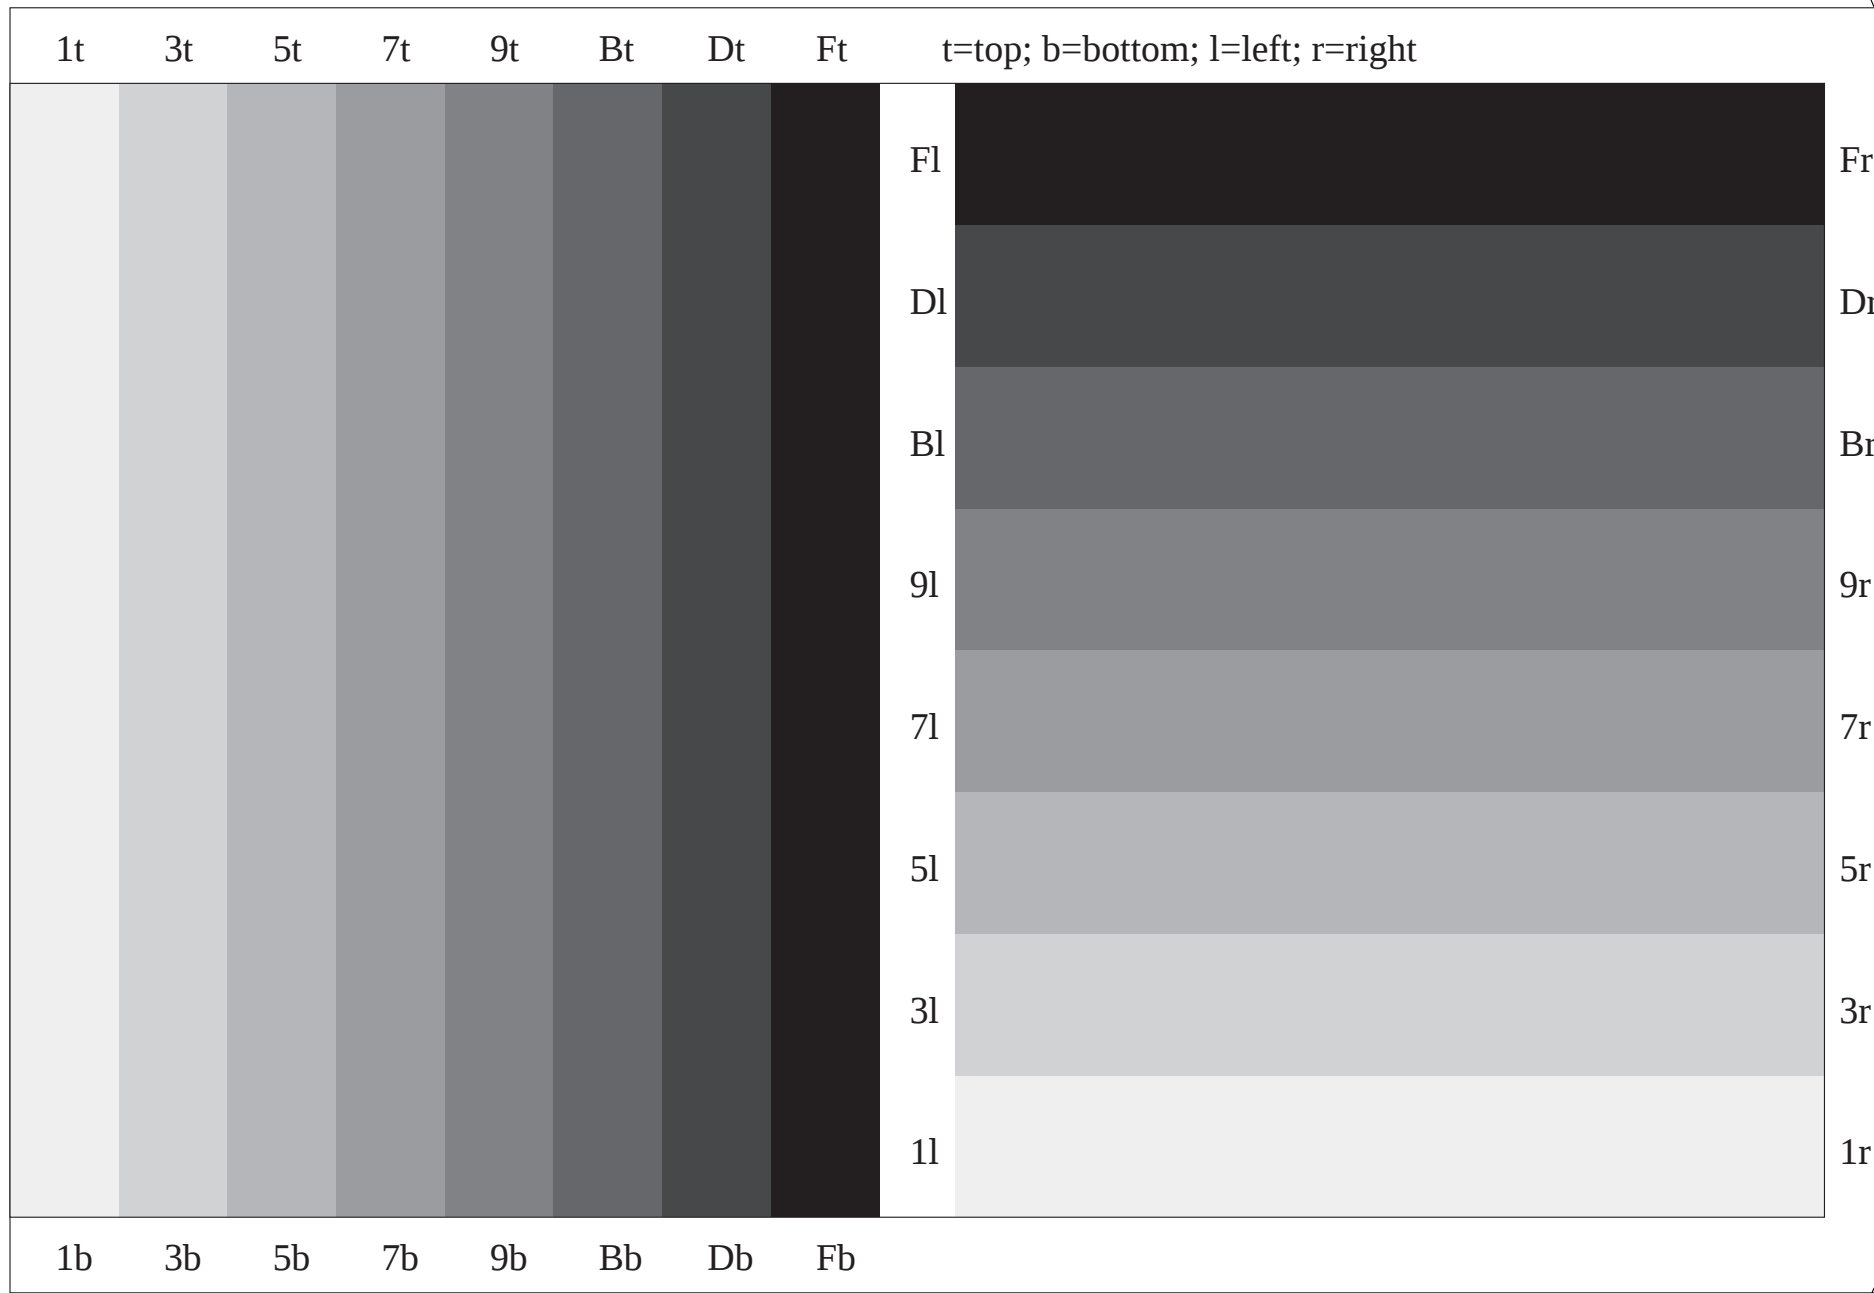

Form 9: Grey rectangles 115 mm x 14.4 mm for yield or emission; PS operator used: 000n* setcmykcolor

ISO/IEC 19752-test chart, form 9
Proposal by DIN NI28

2003-05-01, name1 input: 000n* setcmykcolor
Test device type: name2 output: *Startup (S) data depend*

Form: 9, Serie: 2, Page: 10