


i	LAB*ref	LAB*out, relative	LAB*out/c-ref	ΔE^*	Start output S1
1	66.26 -39.9 -23.26	66.26 -39.9 -23.26	0.0 0.0 0.0	0.01	Specification according to
2	67.98 -37.2 -21.81	66.54 -39.46 -23.02	-1.43 -2.25 -1.21	2.95	ISO/IEC 15775 Annex G
3	69.7 -34.49 -20.35	66.95 -38.82 -22.68	-2.74 -4.31 -2.32	5.63	and DIN 33866-1 Annex G
4	71.42 -31.79 -18.9	67.24 -38.37 -22.43	-4.18 -6.57 -3.53	8.56	relative CIELAB data used for "out"
5	73.15 -29.09 -17.44	68.0 -37.17 -21.79	-5.14 -8.07 -4.34	10.52	$\Delta L^* = 92.08 - 66.26$
6	74.87 -26.38 -15.99	69.02 -35.57 -20.93	-5.84 -9.18 -4.93	11.96	Regularity
7	76.59 -23.68 -14.54	70.18 -33.75 -19.95	-6.4 -10.06 -5.41	13.11	$g^* = 13.5$
8	78.31 -20.98 -13.08	71.51 -31.65 -18.82	-6.79 -10.66 -5.73	13.9	
9	80.03 -18.27 -11.63	72.98 -29.34 -17.58	-7.04 -11.06 -5.94	14.41	Lightness gamut rel. to offset
10	81.75 -15.57 -10.17	74.72 -26.62 -16.12	-7.03 -11.04 -5.93	14.38	$f^* = 33.4$
11	83.47 -12.87 -8.72	76.97 -23.09 -14.22	-6.5 -10.21 -5.49	13.3	
12	85.19 -10.16 -7.27	79.76 -18.7 -11.86	-5.42 -8.52 -4.58	11.11	ΔL^* -gray variation
13	86.92 -7.46 -5.81	83.08 -13.49 -9.05	-3.83 -6.02 -3.23	7.84	$v^* = 0.0$
14	88.64 -4.76 -4.36	86.65 -7.88 -6.04	-1.98 -3.12 -1.67	4.07	
15	90.36 -2.05 -2.9	89.74 -3.03 -3.43	-0.61 -0.97 -0.52	1.27	Mean CIELAB difference (16 steps)
16	92.08 0.64 -1.45	92.08 0.64 -1.45	0.0 0.0 0.0	0.01	$\Delta E^*_{\text{CIELAB}} = 8.3$
17	66.26 -39.9 -23.26	66.26 -39.9 -23.26	0.0 0.0 0.0	0.01	
18	72.72 -29.76 -17.81	67.81 -37.47 -21.95	-4.9 -7.69 -4.13	10.03	
19	79.17 -19.63 -12.36	72.25 -30.5 -18.2	-6.91 -10.86 -5.84	14.15	
20	85.63 -9.49 -6.9	80.59 -17.39 -11.16	-5.02 -7.9 -4.24	10.29	Mean CIELAB difference (5 steps)
21	92.08 0.64 -1.45	92.08 0.64 -1.45	0.0 0.0 0.0	0.01	$\Delta L^*_{\text{CIELAB}} = 6.9$
Mean colour reproduction index: $R^*_{\text{ab,m}} = 63$					

Device: (F); Meas.: F10E00NA.PS; Date: 010501

www.ps.bam.de/DE14/10F/F10E00NA.PS

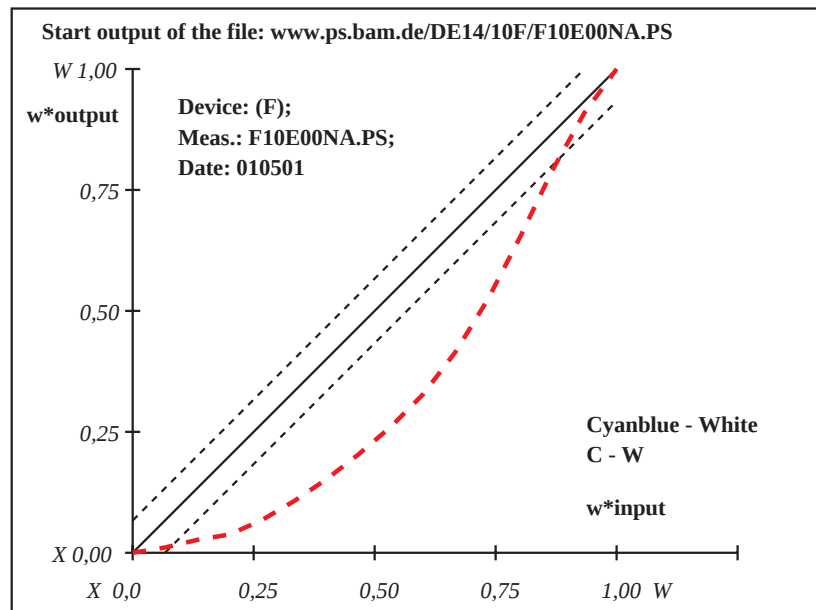

Device: (F); Meas.: F10E00NA.PS; Date: 010501


www.ps.bam.de/DE14/10F/F10E00NA.PS

Output linearization of 16 colour steps according to ISO/IEC 15775; PS operator cmyn* setcmykcolor

i	LAB*ref	LAB*out, relative	LAB*out/c-ref	ΔE^*	Linearized output S2
1	65.89 -40.26 -22.7	65.89 -40.26 -22.7	0.0 0.0 0.0	0.01	Specification according to
2	67.61 -37.57 -21.29	67.44 -37.84 -21.43	-0.16 -0.26 -0.13	0.35	ISO/IEC 15775 Annex G
3	69.33 -34.88 -19.88	69.33 -34.89 -19.89	0.0 0.0 0.0	0.01	and DIN 33866-1 Annex G
4	71.05 -32.19 -18.47	71.12 -32.09 -18.42	0.06 0.1 0.05	0.13	relative CIELAB data used for "out"
5	72.78 -29.5 -17.07	72.84 -29.41 -17.01	0.06 0.1 0.05	0.13	$\Delta L^* = 91.71 - 65.89$
6	74.5 -26.81 -15.66	74.53 -26.76 -15.63	0.03 0.05 0.03	0.07	Regularity
7	76.22 -24.12 -14.25	76.26 -24.05 -14.21	0.05 0.07 0.04	0.1	$g^* = 85.6$
8	77.94 -21.43 -12.84	77.96 -21.41 -12.83	0.02 0.02 0.01	0.03	
9	79.66 -18.75 -11.43	79.53 -18.96 -11.54	-0.13 -0.2 -0.1	0.28	Lightness gamut rel. to offset
10	81.38 -16.06 -10.02	81.0 -16.65 -10.33	-0.37 -0.58 -0.3	0.77	$f^* = 33.4$
11	83.1 -13.37 -8.61	82.78 -13.87 -8.88	-0.31 -0.49 -0.25	0.65	
12	84.82 -10.68 -7.2	84.28 -11.53 -7.65	-0.54 -0.84 -0.44	1.11	ΔL^* -gray variation
13	86.55 -7.99 -5.8	86.05 -8.76 -6.2	-0.48 -0.76 -0.39	1.0	$v^* = 0.0$
14	88.27 -5.3 -4.39	87.99 -5.73 -4.61	-0.27 -0.42 -0.22	0.56	
15	89.99 -2.61 -2.98	89.66 -3.13 -3.25	-0.32 -0.51 -0.26	0.67	Mean CIELAB difference (16 steps)
16	91.71 0.07 -1.57	91.71 0.07 -1.57	0.0 0.0 0.0	0.01	$\Delta E^*_{\text{CIELAB}} = 0.4$
17	65.89 -40.26 -22.7	65.89 -40.26 -22.7	0.0 0.0 0.0	0.01	
18	72.35 -30.18 -17.42	72.41 -30.08 -17.37	0.06 0.1 0.05	0.13	
19	78.8 -20.09 -12.14	78.74 -20.18 -12.18	-0.05 -0.08 -0.04	0.12	
20	85.26 -10.0 -6.85	84.72 -10.84 -7.29	-0.52 -0.82 -0.43	1.08	Mean CIELAB difference (5 steps)
21	91.71 0.07 -1.57	91.71 0.07 -1.57	0.0 0.0 0.0	0.01	$\Delta L^*_{\text{CIELAB}} = 0.3$
Mean colour reproduction index: $R^*_{\text{ab,m}} = 98$					

Device: (F); Meas.: F10E00FA.PS; Date: 010501

www.ps.bam.de/DE14/10F/F10E00FA.PS

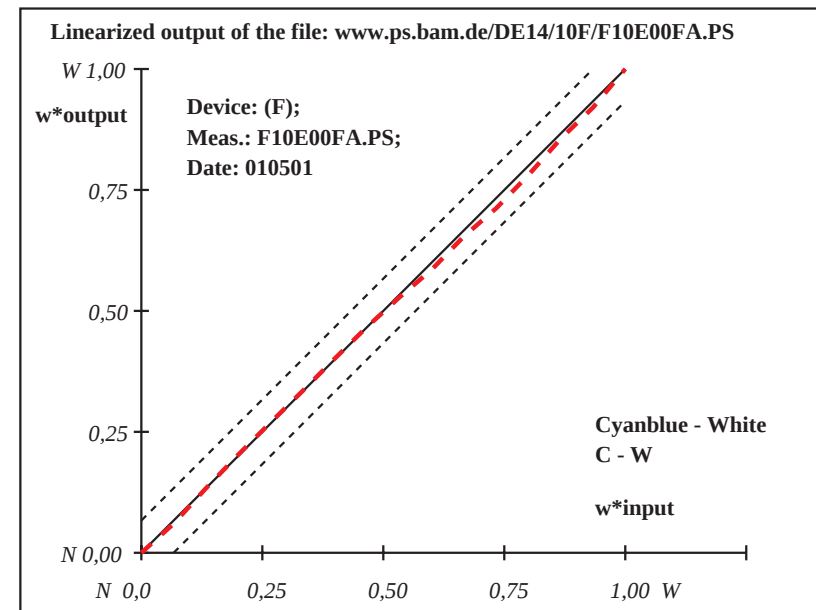

Device: (F); Meas.: F10E00FA.PS; Date: 010501


www.ps.bam.de/DE14/10F/F10E00FA.PS

i	LAB*ref	LAB*out, relative	LAB*out/c-ref	ΔE^*
1	49.38 67.14 -31.92	49.38 67.14 -31.92	0.0 0.0 0.0	0.01
2	52.22 62.71 -29.89	49.82 66.45 -31.6	-2.39 3.74 -1.71	4.77
3	55.07 58.27 -27.85	49.9 66.33 -31.55	-5.16 8.05 -3.68	10.26
4	57.91 53.84 -25.82	50.17 65.9 -31.35	-7.73 12.06 -5.53	15.36
5	60.76 49.41 -23.78	51.08 64.48 -30.7	-9.66 15.07 -6.91	19.2
6	63.6 44.98 -21.75	52.55 62.2 -29.65	-11.05 17.23 -7.89	21.94
7	66.45 40.54 -19.72	55.15 58.15 -27.8	-11.29 17.61 -8.07	22.43
8	69.29 36.11 -17.68	57.72 54.15 -25.96	-11.57 18.04 -8.27	22.98
9	72.14 31.68 -15.65	60.95 49.11 -23.64	-11.17 17.43 -7.99	22.2
10	74.98 27.25 -13.61	65.1 42.65 -20.68	-9.88 15.41 -7.06	19.62
11	77.83 22.81 -11.58	69.64 35.58 -17.44	-8.18 12.76 -5.85	16.26
12	80.67 18.38 -9.55	74.57 27.9 -13.91	-6.1 9.51 -4.36	12.12
13	83.52 13.95 -7.51	79.64 19.98 -10.28	-3.86 6.04 -2.76	7.69
14	86.36 9.52 -5.48	84.93 11.74 -6.5	-1.42 2.23 -1.01	2.84
15	89.21 5.08 -3.44	89.28 4.97 -3.39	0.07 -0.1 0.05	0.14
16	92.05 0.65 -1.41	92.05 0.65 -1.41	0.0 0.0 0.0	0.01
17	49.38 67.14 -31.92	49.38 67.14 -31.92	0.0 0.0 0.0	0.01
18	60.05 50.52 -24.29	50.86 64.84 -30.86	-9.18 14.32 -6.56	18.24
19	70.72 33.9 -16.66	59.33 51.63 -24.8	-11.37 17.73 -8.13	22.59
20	81.38 17.27 -9.04	75.83 25.92 -13.0	-5.54 8.65 -3.96	11.01
21	92.05 0.65 -1.41	92.05 0.65 -1.41	0.0 0.0 0.0	0.01

Start output S1
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 92.05 - 49.38$
Regularity
 $g^* = 9.0$
Lightness gamut rel. to offset
 $f^* = 55.1$
 ΔL^* -gray variation
 $v^* = 0.0$
Mean CIELAB difference (16 steps)
 $\Delta E^*_{CIELAB} = 12.4$
Mean CIELAB difference (5 steps)
 $\Delta L^*_{CIELAB} = 10.4$
Mean colour reproduction index: $R^*_{ab,m} = 45$

Device: (F); Meas.: F10E00NA.PS; Date: 010501

www.ps.bam.de/DE14/10F/F10E00NA.PS

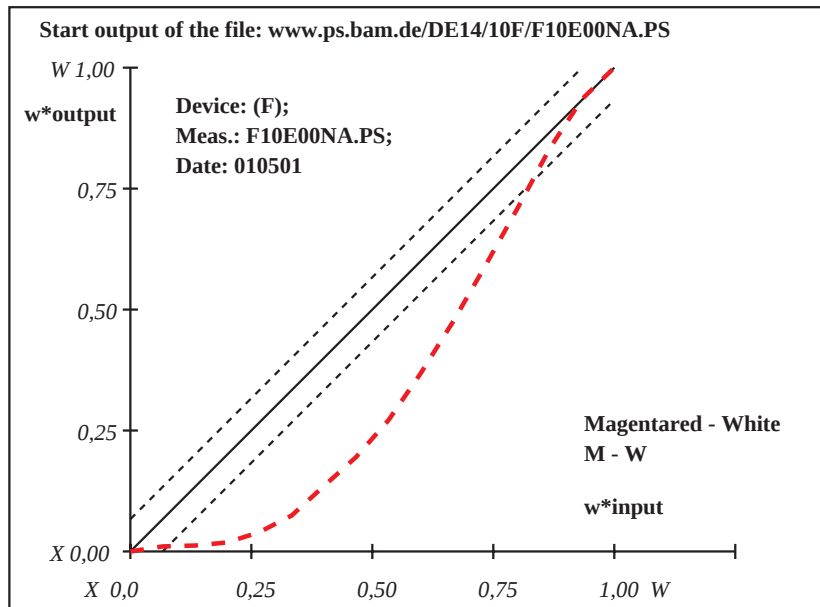

Device: (F); Meas.: F10E00NA.PS; Date: 010501


www.ps.bam.de/DE14/10F/F10E00NA.PS

i	LAB*ref	LAB*out, relative	LAB*out/c-ref	ΔE^*
1	48.85 67.68 -31.88	48.85 67.68 -31.88	0.0 0.0 0.0	0.01
2	51.7 63.18 -29.86	52.2 62.39 -29.51	0.5 -0.77 0.35	0.99
3	54.56 58.67 -27.84	54.87 58.17 -27.62	0.32 -0.49 0.22	0.63
4	57.41 54.17 -25.82	57.44 54.12 -25.8	0.03 -0.04 0.02	0.06
5	60.26 49.66 -23.8	60.12 49.88 -23.9	-0.13 0.22 -0.09	0.28
6	63.11 45.16 -21.78	62.93 45.44 -21.91	-0.17 0.29 -0.12	0.36
7	65.97 40.65 -19.76	65.81 40.89 -19.87	-0.14 0.24 -0.1	0.31
8	68.82 36.15 -17.74	68.21 37.11 -18.18	-0.6 0.96 -0.42	1.22
9	71.67 31.64 -15.73	71.07 32.59 -16.15	-0.59 0.95 -0.41	1.2
10	74.52 27.14 -13.71	73.64 28.54 -14.33	-0.88 1.4 -0.62	1.77
11	77.38 22.63 -11.69	76.9 23.39 -12.03	-0.47 0.76 -0.33	0.96
12	80.23 18.13 -9.67	79.35 19.52 -10.29	-0.87 1.39 -0.61	1.76
13	83.08 13.62 -7.65	82.26 14.92 -8.23	-0.81 1.3 -0.57	1.65
14	85.93 9.12 -5.63	85.01 10.58 -6.29	-0.92 1.46 -0.65	1.85
15	88.79 4.61 -3.61	88.05 5.78 -4.13	-0.73 1.16 -0.51	1.47
16	91.64 0.11 -1.59	91.64 0.11 -1.59	0.0 0.0 0.0	0.01
17	48.85 67.68 -31.88	48.85 67.68 -31.88	0.0 0.0 0.0	0.01
18	59.55 50.79 -24.31	59.45 50.94 -24.38	-0.09 0.15 -0.06	0.19
19	70.24 33.9 -16.73	69.64 34.85 -17.16	-0.59 0.95 -0.42	1.21
20	80.94 17.0 -9.16	80.07 18.37 -9.78	-0.86 1.37 -0.6	1.73
21	91.64 0.11 -1.59	91.64 0.11 -1.59	0.0 0.0 0.0	0.01

Linearized output S2
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 91.64 - 48.85$
Regularity
 $g^* = 88.1$
Lightness gamut rel. to offset
 $f^* = 55.3$
 ΔL^* -gray variation
 $v^* = 0.0$
Mean CIELAB difference (16 steps)
 $\Delta E^*_{CIELAB} = 0.9$
Mean CIELAB difference (5 steps)
 $\Delta L^*_{CIELAB} = 0.6$
Mean colour reproduction index: $R^*_{ab,m} = 96$

Device: (F); Meas.: F10E00FA.PS; Date: 010501

www.ps.bam.de/DE14/10F/F10E00FA.PS

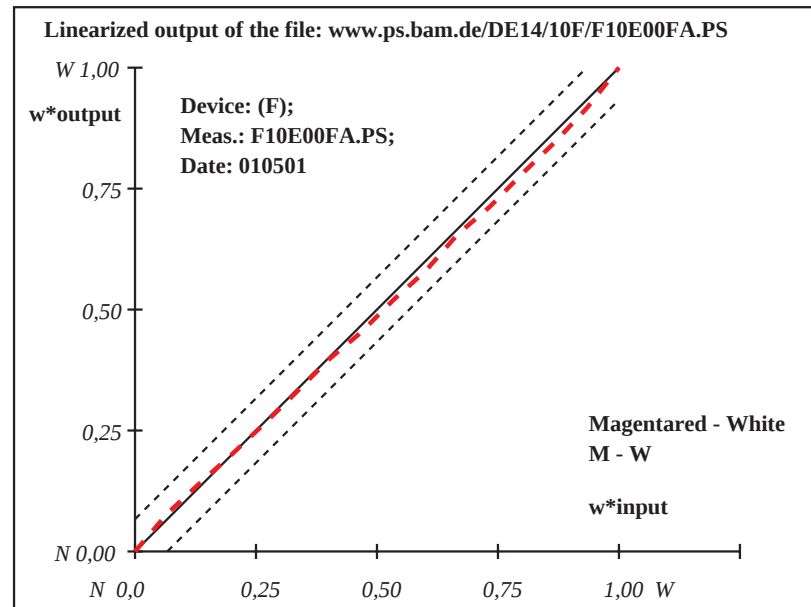

Device: (F); Meas.: F10E00FA.PS; Date: 010501


www.ps.bam.de/DE14/10F/F10E00FA.PS

i	LAB*ref	LAB*out, relative	LAB*out/c-ref	ΔE^*
1	84.74 -9.38 64.86	84.74 -9.38 64.86	0.0 0.0 0.0	0.01
2	85.23 -8.71 60.44	85.18 -8.78 60.86	-0.04 -0.05 0.42	0.43
3	85.71 -8.05 56.03	85.54 -8.28 57.54	-0.16 -0.22 1.52	1.55
4	86.2 -7.38 51.61	85.79 -7.94 55.33	-0.4 -0.55 3.72	3.79
5	86.68 -6.72 47.19	86.21 -7.36 51.48	-0.46 -0.64 4.29	4.36
6	87.17 -6.05 42.77	86.68 -6.73 47.26	-0.48 -0.67 4.49	4.56
7	87.66 -5.38 38.36	87.08 -6.17 43.57	-0.56 -0.78 5.21	5.3
8	88.14 -4.72 33.94	87.62 -5.44 38.73	-0.52 -0.71 4.79	4.87
9	88.63 -4.05 29.52	88.13 -4.73 34.04	-0.49 -0.67 4.52	4.6
10	89.11 -3.39 25.1	88.67 -4.0 29.15	-0.44 -0.6 4.05	4.12
11	89.6 -2.72 20.69	89.28 -3.16 23.61	-0.31 -0.43 2.93	2.98
12	90.09 -2.05 16.27	89.92 -2.28 17.74	-0.15 -0.21 1.47	1.49
13	90.57 -1.39 11.85	90.67 -1.26 10.97	0.1 0.13 -0.87	0.89
14	91.06 -0.72 7.43	91.29 -0.4 5.29	0.24 0.32 -2.14	2.18
15	91.54 -0.06 3.02	91.76 0.23 1.04	0.22 0.3 -1.96	2.01
16	92.03 0.6 -1.39	92.03 0.6 -1.39	0.0 0.0 0.0	0.01
17	84.74 -9.38 64.86	84.74 -9.38 64.86	0.0 0.0 0.0	0.01
18	86.56 -6.88 48.3	86.11 -7.51 52.44	-0.45 -0.62 4.15	4.22
19	88.38 -4.39 31.73	87.87 -5.09 36.38	-0.5 -0.69 4.65	4.73
20	90.21 -1.89 15.17	90.11 -2.02 16.04	-0.09 -0.12 0.88	0.9
21	92.03 0.6 -1.39	92.03 0.6 -1.39	0.0 0.0 0.0	0.01
Mean colour reproduction index: $R^*_{ab,m} = 88$				

Start output S1
Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 92.03 - 84.74$
Regularity
 $g^* = 61.1$
Lightness gamut rel. to offset
 $f^* = 9.4$
 ΔL^* -gray variation
 $v^* = 0.0$
Mean CIELAB difference (16 steps)
 $\Delta E^*_{CIELAB} = 2.7$
Mean CIELAB difference (5 steps)
 $\Delta L^*_{CIELAB} = 2.0$

Device: (F); Meas.: F10E00NA.PS; Date: 010501

www.ps.bam.de/DE14/10F/F10E00NA.PS

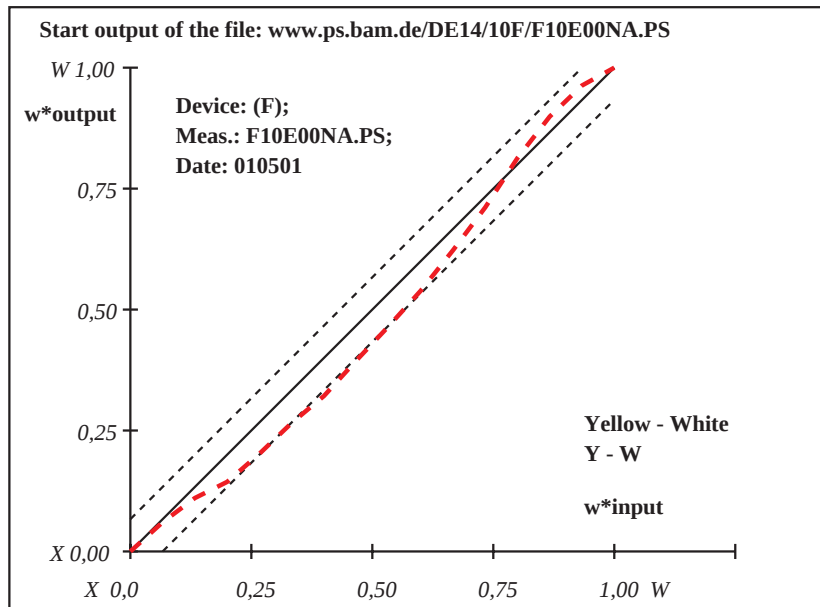

Device: (F); Meas.: F10E00NA.PS; Date: 010501


www.ps.bam.de/DE14/10F/F10E00NA.PS

i	LAB*ref	LAB*out, relative	LAB*out/c-ref	ΔE^*
1	83.98 -10.35 63.66	83.98 -10.35 63.66	0.0 0.0 0.0	0.01
2	84.48 -9.66 59.31	84.35 -9.84 60.46	-0.12 -0.17 1.15	1.17
3	84.97 -8.98 54.97	84.89 -9.1 55.73	-0.08 -0.11 0.76	0.78
4	85.47 -8.29 50.62	85.29 -8.53 52.16	-0.17 -0.23 1.54	1.57
5	85.97 -7.6 46.28	85.69 -7.98 48.66	-0.26 -0.37 2.39	2.43
6	86.46 -6.91 41.93	86.26 -7.2 43.71	-0.19 -0.27 1.78	1.82
7	86.96 -6.23 37.58	86.72 -6.56 39.67	-0.23 -0.32 2.08	2.12
8	87.46 -5.54 33.24	87.19 -5.91 35.56	-0.26 -0.36 2.33	2.37
9	87.95 -4.85 28.89	87.68 -5.23 31.28	-0.26 -0.37 2.39	2.44
10	88.45 -4.16 24.55	88.12 -4.62 27.43	-0.32 -0.45 2.89	2.94
11	88.95 -3.48 20.2	88.63 -3.92 23.01	-0.31 -0.43 2.81	2.86
12	89.44 -2.79 15.85	89.12 -3.23 18.66	-0.31 -0.43 2.81	2.86
13	89.94 -2.1 11.51	89.66 -2.49 13.95	-0.27 -0.38 2.44	2.49
14	90.44 -1.41 7.16	90.24 -1.69 8.9	-0.19 -0.27 1.74	1.77
15	90.93 -0.73 2.82	90.82 -0.88 3.81	-0.1 -0.15 0.99	1.01
16	91.43 -0.04 -1.52	91.43 -0.04 -1.52	0.0 0.0 0.0	0.01
17	83.98 -10.35 63.66	83.98 -10.35 63.66	0.0 0.0 0.0	0.01
18	85.84 -7.77 47.36	85.59 -8.12 49.54	-0.24 -0.33 2.18	2.22
19	87.71 -5.2 31.06	87.44 -5.57 33.42	-0.26 -0.36 2.36	2.4
20	89.57 -2.62 14.77	89.26 -3.05 17.48	-0.3 -0.42 2.72	2.77
21	91.43 -0.04 -1.52	91.43 -0.04 -1.52	0.0 0.0 0.0	0.01
Mean colour reproduction index: $R^*_{ab,m} = 92$				

Linearized output S2
Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 91.43 - 83.98$
Regularity
 $g^* = 74.3$
Lightness gamut rel. to offset
 $f^* = 9.6$
 ΔL^* -gray variation
 $v^* = 0.0$
Mean CIELAB difference (16 steps)
 $\Delta E^*_{CIELAB} = 1.8$
Mean CIELAB difference (5 steps)
 $\Delta L^*_{CIELAB} = 1.5$

Device: (F); Meas.: F10E00FA.PS; Date: 010501

www.ps.bam.de/DE14/10F/F10E00FA.PS

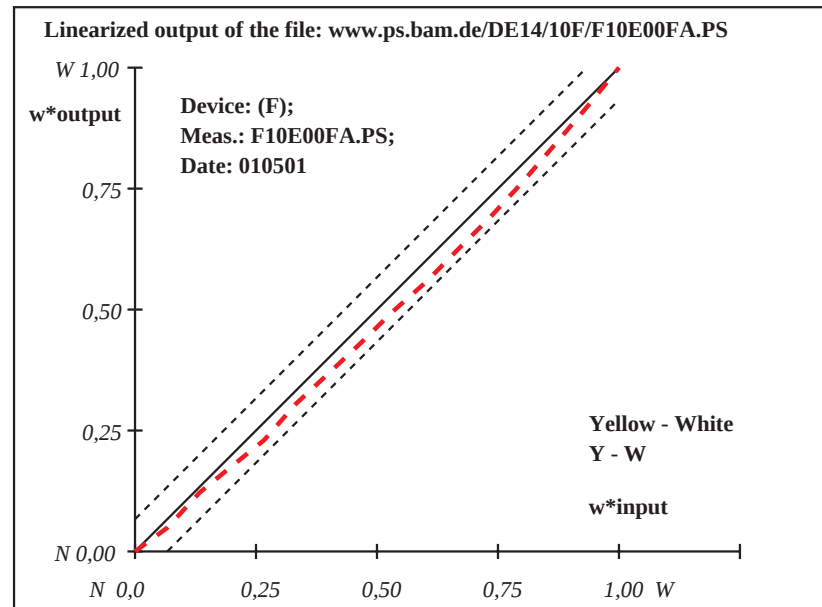

Device: (F); Meas.: F10E00FA.PS; Date: 010501


www.ps.bam.de/DE14/10F/F10E00FA.PS

i	LAB*ref	LAB*out, relative	LAB*out/c-ref	ΔE^*
1	6.71 -2.97 3.06	6.71 -2.97 3.06	0.0 0.0 0.0	0.01
2	12.39 -2.73 2.76	9.38 -2.86 2.92	-3.0 -0.12 0.16	3.02
3	18.07 -2.49 2.46	14.14 -2.65 2.67	-3.92 -0.16 0.21	3.94
4	23.75 -2.24 2.16	21.9 -2.32 2.26	-1.84 -0.07 0.1	1.85
5	29.42 -2.0 1.86	29.05 -2.02 1.88	-0.36 -0.01 0.02	0.37
6	35.1 -1.76 1.56	36.4 -1.7 1.49	1.3 0.06 -0.06	1.3
7	40.78 -1.52 1.26	42.61 -1.44 1.16	1.83 0.08 -0.09	1.83
8	46.46 -1.28 0.96	48.6 -1.18 0.85	2.14 0.09 -0.1	2.14
9	52.14 -1.03 0.66	54.3 -0.94 0.55	2.16 0.09 -0.1	2.16
10	57.82 -0.79 0.36	59.9 -0.7 0.25	2.08 0.09 -0.1	2.08
11	63.5 -0.55 0.06	65.36 -0.47 -0.03	1.86 0.08 -0.09	1.87
12	69.18 -0.31 -0.23	71.36 -0.22 -0.35	2.18 0.09 -0.11	2.18
13	74.85 -0.07 -0.53	77.22 0.02 -0.66	2.37 0.1 -0.12	2.37
14	80.53 0.17 -0.83	83.14 0.28 -0.97	2.61 0.11 -0.13	2.62
15	86.21 0.41 -1.13	88.17 0.49 -1.23	1.96 0.08 -0.09	1.96
16	91.89 0.65 -1.43	91.89 0.65 -1.43	0.0 0.0 0.0	0.01
17	6.71 -2.97 3.06	6.71 -2.97 3.06	0.0 0.0 0.0	0.01
18	28.01 -2.06 1.94	27.26 -2.09 1.97	-0.73 -0.02 0.04	0.74
19	49.3 -1.16 0.81	51.45 -1.06 0.7	2.15 0.09 -0.1	2.15
20	70.6 -0.25 -0.31	72.82 -0.15 -0.42	2.23 0.09 -0.11	2.23
21	91.89 0.65 -1.43	91.89 0.65 -1.43	0.0 0.0 0.0	0.01

Start output S1
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 91.89 - 6.71$
Regularity
 $g^* = 78.8$
Lightness gamut rel. to offset
 $f^* = 110.1$
 ΔL^* -gray variation
 $v^* = 0.0$
Mean CIELAB difference (16 steps)
 $\Delta E^*_{CIELAB} = 1.9$
Mean CIELAB difference (5 steps)
 $\Delta L^*_{CIELAB} = 1.0$
Mean colour reproduction index: $R^*_{ab,m} = 92$

Device: (F); Meas.: F10E00NA.PS; Date: 010501

www.ps.bam.de/DE14/10F/F10E00NA.PS

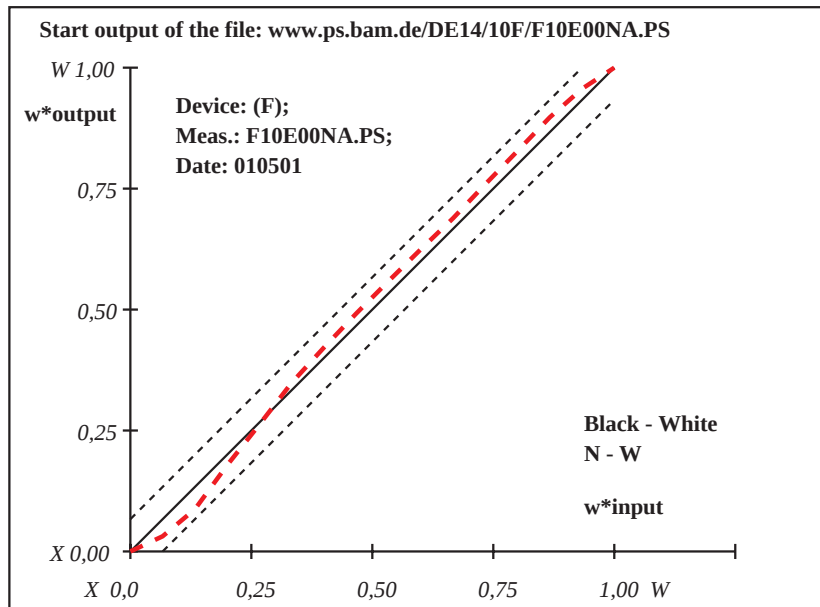

Device: (F); Meas.: F10E00NA.PS; Date: 010501


www.ps.bam.de/DE14/10F/F10E00NA.PS

i	LAB*ref	LAB*out, relative	LAB*out/c-ref	ΔE^*
1	7.4 -3.75 2.96	7.4 -3.75 2.96	0.0 0.0 0.0	0.01
2	13.01 -3.49 2.65	12.57 -3.51 2.68	-0.43 -0.01 0.02	0.44
3	18.61 -3.23 2.35	18.61 -3.23 2.35	0.0 0.0 0.0	0.01
4	24.22 -2.97 2.04	24.86 -2.94 2.0	0.64 0.03 -0.03	0.64
5	29.82 -2.7 1.73	30.38 -2.68 1.7	0.55 0.03 -0.02	0.56
6	35.43 -2.44 1.43	35.22 -2.45 1.44	-0.2 0.0 0.01	0.21
7	41.03 -2.18 1.12	41.15 -2.18 1.11	0.12 0.01 0.0	0.12
8	46.64 -1.92 0.81	46.44 -1.93 0.82	-0.18 0.0 0.01	0.19
9	52.24 -1.66 0.51	51.7 -1.68 0.54	-0.53 -0.02 0.03	0.54
10	57.85 -1.4 0.2	57.66 -1.41 0.21	-0.18 0.0 0.01	0.19
11	63.45 -1.14 -0.1	63.36 -1.14 -0.09	-0.08 0.0 0.01	0.09
12	69.06 -0.88 -0.4	68.65 -0.89 -0.38	-0.4 -0.01 0.02	0.41
13	74.66 -0.61 -0.71	74.15 -0.64 -0.68	-0.5 -0.01 0.03	0.51
14	80.27 -0.35 -1.02	79.99 -0.37 -1.0	-0.27 0.0 0.02	0.28
15	85.87 -0.09 -1.32	85.39 -0.11 -1.3	-0.48 -0.01 0.03	0.49
16	91.48 0.16 -1.63	91.48 0.16 -1.63	0.0 0.0 0.0	0.01
17	7.4 -3.75 2.96	7.4 -3.75 2.96	0.0 0.0 0.0	0.01
18	28.42 -2.77 1.81	29.0 -2.74 1.78	0.58 0.03 -0.02	0.58
19	49.44 -1.79 0.66	49.07 -1.81 0.68	-0.36 -0.01 0.02	0.37
20	70.46 -0.81 -0.48	70.03 -0.83 -0.46	-0.42 -0.01 0.02	0.43
21	91.48 0.16 -1.63	91.48 0.16 -1.63	0.0 0.0 0.0	0.01

Linearized output S2
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 91.48 - 7.4$
Regularity
 $g^* = 93.0$
Lightness gamut rel. to offset
 $f^* = 108.6$
 ΔL^* -gray variation
 $v^* = 0.0$
Mean CIELAB difference (16 steps)
 $\Delta E^*_{CIELAB} = 0.3$
Mean CIELAB difference (5 steps)
 $\Delta L^*_{CIELAB} = 0.3$
Mean colour reproduction index: $R^*_{ab,m} = 99$

Device: (F); Meas.: F10E00FA.PS; Date: 010501

www.ps.bam.de/DE14/10F/F10E00FA.PS

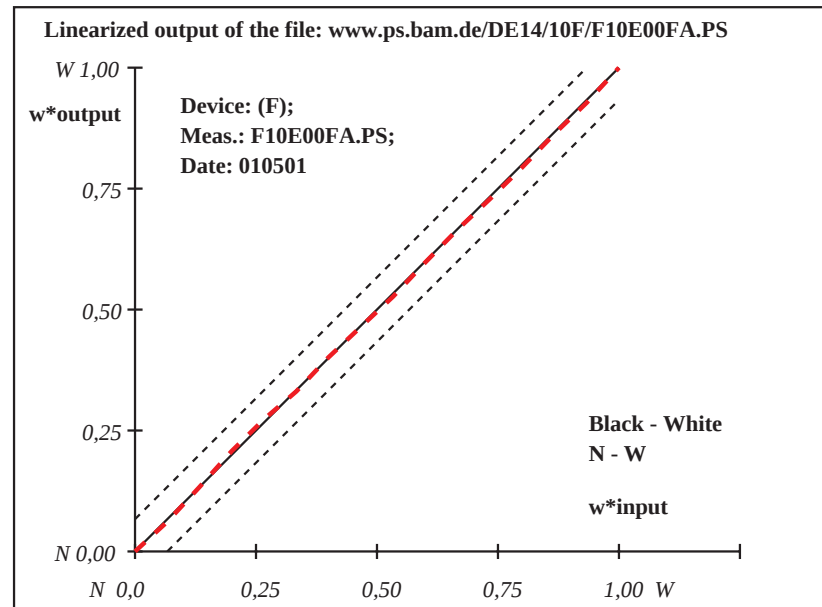


Device: (F); Meas.: F10E00FA.PS; Date: 010501

www.ps.bam.de/DE14/10F/F10E00FA.PS

i	LAB*ref			LAB*out, relative			LAB*out/c-ref			ΔE^*	Start output S1 Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G relative CIELAB data used for "out" $\Delta L^* = 91.79 - 40.2$ Regularity $g^* = 64.5$ Lightness gamut rel. to offset $f^* = 66.7$ ΔL^* -gray variation $v^* = 0.0$ Mean CIELAB difference (16 steps) $\Delta E^*_{CIELAB} = 3.5$ Mean CIELAB difference (5 steps) $\Delta L^*_{CIELAB} = 2.4$ Mean colour reproduction index: $R^*_{ab,m} = 85$
1	40.2	61.14	47.75	40.2	61.14	47.75	0.0	0.0	0.0	0.01	
2	43.64	57.11	44.47	41.51	59.6	46.5	-2.12	2.49	2.03	3.86	
3	47.08	53.08	41.18	43.19	57.64	44.9	-3.88	4.56	3.71	7.05	
4	50.52	49.05	37.9	46.3	53.99	41.92	-4.2	4.94	4.02	7.64	
5	53.96	45.02	34.62	50.67	48.87	37.76	-3.28	3.85	3.14	5.96	
6	57.4	40.99	31.34	54.62	44.24	33.98	-2.76	3.25	2.65	5.02	
7	60.84	36.96	28.05	58.27	39.97	30.51	-2.56	3.01	2.45	4.66	
8	64.28	32.93	24.77	61.86	35.76	27.08	-2.4	2.83	2.3	4.38	
9	67.71	28.9	21.49	65.53	31.46	23.57	-2.18	2.56	2.09	3.96	
10	71.15	24.87	18.21	69.01	27.39	20.26	-2.14	2.52	2.05	3.89	
11	74.59	20.84	14.92	72.77	22.98	16.66	-1.81	2.14	1.74	3.3	
12	78.03	16.81	11.64	77.14	17.85	12.49	-0.88	1.04	0.85	1.61	
13	81.47	12.78	8.36	81.49	12.75	8.34	0.02	-0.02	-0.01	0.04	
14	84.91	8.75	5.08	86.34	7.08	3.71	1.43	-1.66	-1.35	2.58	
15	88.35	4.72	1.79	89.77	3.06	0.44	1.42	-1.65	-1.34	2.57	
16	91.79	0.69	-1.48	91.79	0.69	-1.48	0.0	0.0	0.0	0.01	
17	40.2	61.14	47.75	40.2	61.14	47.75	0.0	0.0	0.0	0.01	
18	53.1	46.03	35.44	49.58	50.15	38.8	-3.51	4.12	3.36	6.38	
19	66.0	30.92	23.13	63.7	33.61	25.33	-2.29	2.69	2.2	4.17	
20	78.89	15.8	10.82	78.23	16.58	11.45	-0.65	0.77	0.63	1.2	
21	91.79	0.69	-1.48	91.79	0.69	-1.48	0.0	0.0	0.0	0.01	

Device: (F); Meas.: F10E00NA.PS; Date: 010501

www.ps.bam.de/DE14/10F/F10E00NA.PS

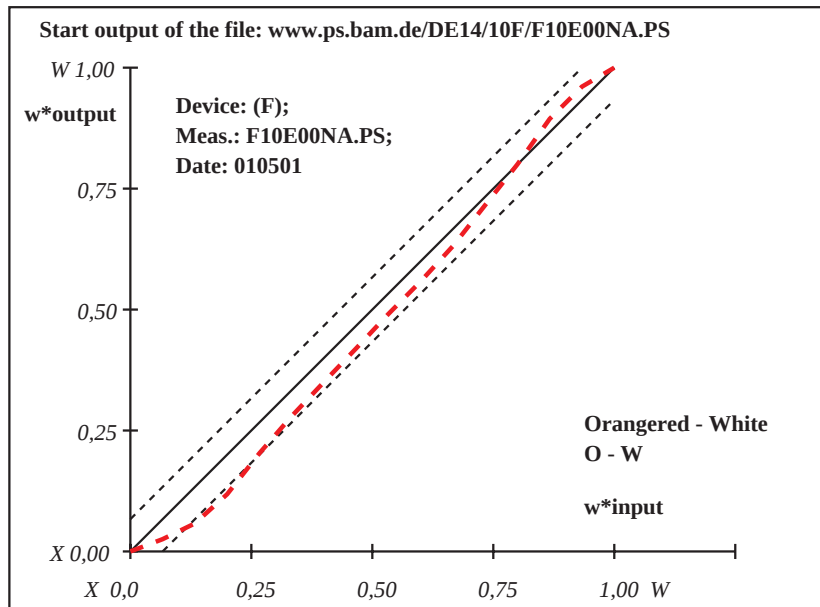


Device: (F); Meas.: F10E00NA.PS; Date: 010501

www.ps.bam.de/DE14/10F/F10E00NA.PS

i	LAB*ref			LAB*out, relative			LAB*out/c-ref			ΔE^*	Linearized output S2 Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G relative CIELAB data used for "out" $\Delta L^* = 91.52 - 40.18$ Regularity $g^* = 88.6$ Lightness gamut rel. to offset $f^* = 66.3$ ΔL^* -gray variation $v^* = 0.0$ Mean CIELAB difference (16 steps) $\Delta E^*_{CIELAB} = 1.1$ Mean CIELAB difference (5 steps) $\Delta L^*_{CIELAB} = 0.8$ Mean colour reproduction index: $R^*_{ab,m} = 95$
1	40.18	60.52	47.02	40.18	60.52	47.02	0.0	0.0	0.0	0.01	
2	43.6	56.5	43.77	43.72	56.36	43.66	0.12	-0.13	-0.1	0.21	
3	47.03	52.47	40.52	46.97	52.54	40.57	-0.04	0.06	0.05	0.1	
4	50.45	48.45	37.28	50.56	48.32	37.17	0.11	-0.12	-0.09	0.2	
5	53.87	44.43	34.03	53.36	45.03	34.52	-0.5	0.6	0.49	0.93	
6	57.29	40.41	30.78	56.63	41.19	31.41	-0.65	0.78	0.63	1.2	
7	60.72	36.38	27.53	60.15	37.05	28.07	-0.55	0.66	0.54	1.02	
8	64.14	32.36	24.28	63.08	33.61	25.29	-1.05	1.25	1.01	1.93	
9	67.56	28.34	21.04	66.84	29.19	21.72	-0.71	0.85	0.68	1.31	
10	70.98	24.32	17.79	70.17	25.28	18.56	-0.81	0.96	0.78	1.48	
11	74.41	20.29	14.54	73.6	21.24	15.31	-0.8	0.95	0.77	1.47	
12	77.83	16.27	11.29	76.77	17.51	12.3	-1.05	1.24	1.0	1.92	
13	81.25	12.25	8.04	80.24	13.43	9.0	-1.0	1.19	0.96	1.83	
14	84.67	8.23	4.8	83.66	9.42	5.76	-1.01	1.2	0.97	1.84	
15	88.1	4.2	1.55	87.22	5.23	2.38	-0.86	1.03	0.83	1.58	
16	91.52	0.18	-1.69	91.52	0.18	-1.69	0.0	0.0	0.0	0.01	
17	40.18	60.52	47.02	40.18	60.52	47.02	0.0	0.0	0.0	0.01	
18	53.02	45.44	34.84	52.66	45.86	35.18	-0.35	0.42	0.34	0.65	
19	65.85	30.35	22.66	64.96	31.4	23.51	-0.88	1.05	0.85	1.62	
20	78.69	15.27	10.48	77.64	16.49	11.47	-1.04	1.23	0.99	1.89	
21	91.52	0.18	-1.69	91.52	0.18	-1.69	0.0	0.0	0.0	0.01	

Device: (F); Meas.: F10E00FA.PS; Date: 010501

www.ps.bam.de/DE14/10F/F10E00FA.PS

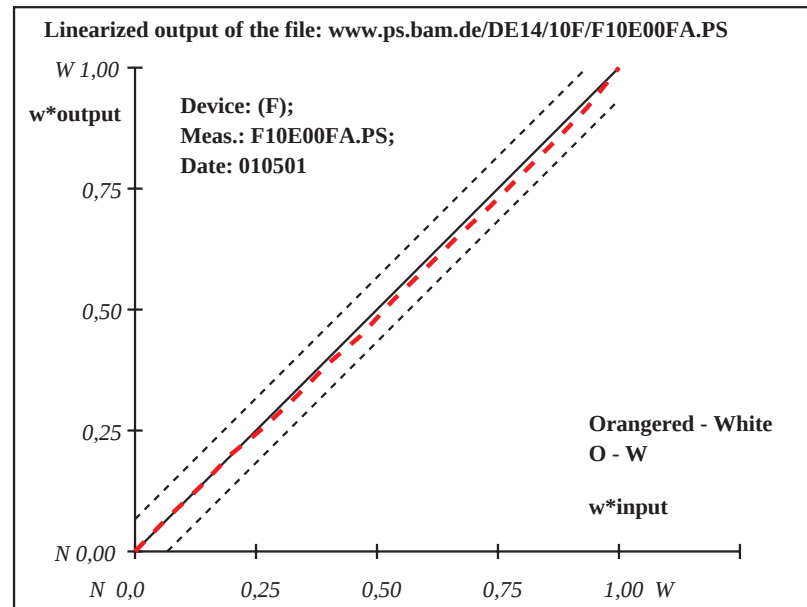


Device: (F); Meas.: F10E00FA.PS; Date: 010501

www.ps.bam.de/DE14/10F/F10E00FA.PS

i	LAB*ref			LAB*out, relative			LAB*out/c-ref			ΔE^*	Start output S1 Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G relative CIELAB data used for "out" $\Delta L^* = 91.68 - 61.44$ Regularity $g^* = 50.9$ Lightness gamut rel. to offset $f^* = 39.1$ ΔL^*-gray variation $v^* = 0.0$ Mean CIELAB difference (16 steps) $\Delta E^*_{CIELAB} = 5.0$ Mean CIELAB difference (5 steps) $\Delta L^*_{CIELAB} = 4.3$ Mean colour reproduction index: $R^*_{ab,m} = 78$
1	61.44	-49.68	52.23	61.44	-49.68	52.23	0.0	0.0	0.0	0.01	
2	63.46	-46.33	48.64	62.61	-47.73	50.14	-0.83	-1.39	1.5	2.22	
3	65.47	-42.97	45.05	63.99	-45.43	47.68	-1.47	-2.45	2.63	3.9	
4	67.49	-39.62	41.46	65.2	-43.43	45.54	-2.28	-3.8	4.08	6.03	
5	69.5	-36.27	37.87	66.85	-40.68	42.6	-2.65	-4.41	4.73	6.99	
6	71.52	-32.91	34.28	68.67	-37.65	39.35	-2.84	-4.72	5.07	7.49	
7	73.54	-29.56	30.69	70.56	-34.5	35.99	-2.96	-4.93	5.29	7.83	
8	75.55	-26.21	27.1	72.28	-31.66	32.94	-3.27	-5.44	5.83	8.63	
9	77.57	-22.85	23.52	74.32	-28.25	29.29	-3.23	-5.39	5.78	8.54	
10	79.58	-19.5	19.93	76.34	-24.9	25.71	-3.24	-5.39	5.78	8.55	
11	81.6	-16.15	16.34	78.37	-21.52	22.09	-3.22	-5.36	5.75	8.51	
12	83.62	-12.79	12.75	81.06	-17.04	17.29	-2.54	-4.24	4.55	6.72	
13	85.63	-9.44	9.16	84.29	-11.68	11.55	-1.33	-2.23	2.39	3.54	
14	87.65	-6.09	5.57	87.71	-5.99	5.46	0.06	0.1	-0.1	0.16	
15	89.66	-2.73	1.98	90.13	-1.96	1.15	0.47	0.78	-0.82	1.23	
16	91.68	0.61	-1.6	91.68	0.61	-1.6	0.0	0.0	0.0	0.01	
17	61.44	-49.68	52.23	61.44	-49.68	52.23	0.0	0.0	0.0	0.01	
18	69.0	-37.1	38.77	66.44	-41.37	43.34	-2.55	-4.26	4.57	6.75	
19	76.56	-24.53	25.31	73.3	-29.95	31.11	-3.25	-5.41	5.8	8.59	
20	84.12	-11.96	11.85	81.87	-15.7	15.86	-2.24	-3.73	4.01	5.93	
21	91.68	0.61	-1.6	91.68	0.61	-1.6	0.0	0.0	0.0	0.01	

Device: (F); Meas.: F10E00NA.PS; Date: 010501

www.ps.bam.de/DE14/10F/F10E00NA.PS

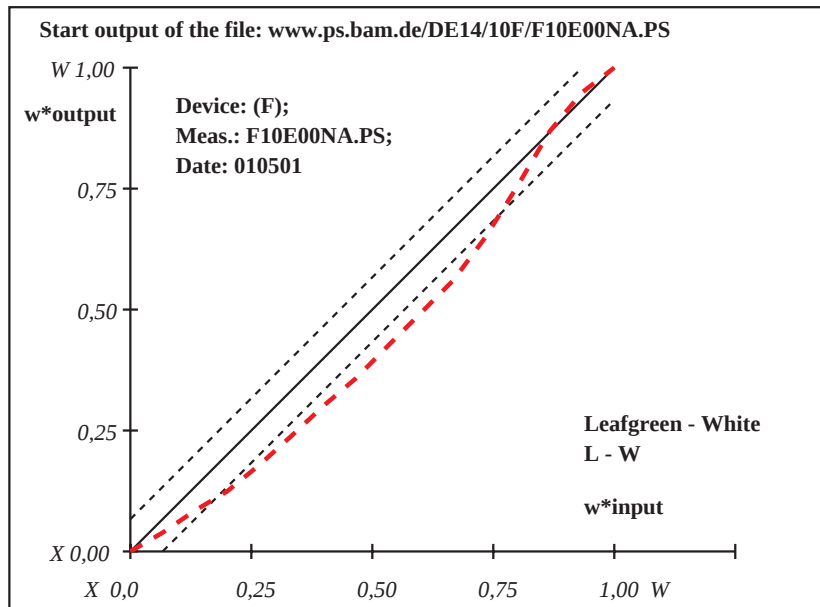


Device: (F); Meas.: F10E00NA.PS; Date: 010501

www.ps.bam.de/DE14/10F/F10E00NA.PS

i	LAB*ref			LAB*out, relative			LAB*out/c-ref			ΔE^*	Linearized output S2 Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G relative CIELAB data used for "out" $\Delta L^* = 91.58 - 61.69$ Regularity $g^* = 86.3$ Lightness gamut rel. to offset $f^* = 38.6$ ΔL^*-gray variation $v^* = 0.0$ Mean CIELAB difference (16 steps) $\Delta E^*_{CIELAB} = 1.2$ Mean CIELAB difference (5 steps) $\Delta L^*_{CIELAB} = 0.9$ Mean colour reproduction index: $R^*_{ab,m} = 95$
1	61.69	-49.74	51.28	61.69	-49.74	51.28	0.0	0.0	0.0	0.01	
2	63.68	-46.42	47.76	63.51	-46.7	48.06	-0.16	-0.28	0.31	0.45	
3	65.68	-43.09	44.23	65.81	-42.87	44.0	0.14	0.23	-0.23	0.36	
4	67.67	-39.77	40.71	67.38	-40.24	41.21	-0.27	-0.46	0.5	0.74	
5	69.66	-36.44	37.19	69.22	-37.18	37.97	-0.43	-0.73	0.78	1.17	
6	71.65	-33.12	33.67	70.96	-34.27	34.89	-0.68	-1.14	1.22	1.81	
7	73.65	-29.8	30.14	72.99	-30.88	31.29	-0.64	-1.08	1.15	1.71	
8	75.64	-26.47	26.62	74.99	-27.55	27.77	-0.64	-1.07	1.15	1.7	
9	77.63	-23.15	23.1	77.15	-23.96	23.96	-0.48	-0.8	0.86	1.28	
10	79.62	-19.82	19.58	79.02	-20.84	20.65	-0.6	-1.01	1.08	1.6	
11	81.62	-16.5	16.05	80.96	-17.6	17.22	-0.65	-1.09	1.16	1.73	
12	83.61	-13.18	12.53	82.9	-14.36	13.79	-0.7	-1.18	1.26	1.87	
13	85.6	-9.85	9.01	84.85	-11.11	10.34	-0.74	-1.25	1.33	1.98	
14	87.59	-6.53	5.49	86.9	-7.69	6.71	-0.68	-1.15	1.23	1.83	
15	89.59	-3.2	1.96	89.21	-3.84	2.64	-0.37	-0.62	0.67	1.0	
16	91.58	0.11	-1.55	91.58	0.11	-1.55	0.0	0.0	0.0	0.01	
17	61.69	-49.74	51.28	61.69	-49.74	51.28	0.0	0.0	0.0	0.01	
18	69.16	-37.28	38.07	68.76	-37.95	38.78	-0.39	-0.66	0.71	1.06	
19	76.64	-24.81	24.86	76.07	-25.76	25.86	-0.56	-0.94	1.0	1.49	
20	84.11	-12.35	11.65	83.38	-13.55	12.93	-0.71	-1.2	1.28	1.9	
21	91.58	0.11	-1.55	91.58	0.11	-1.55	0.0	0.0	0.0	0.01	

Device: (F); Meas.: F10E00FA.PS; Date: 010501

www.ps.bam.de/DE14/10F/F10E00FA.PS

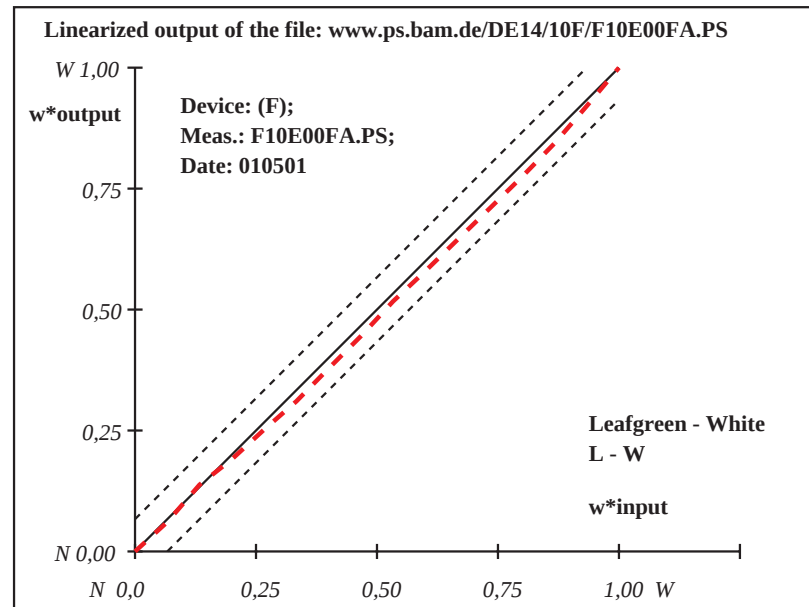

Device: (F); Meas.: F10E00FA.PS; Date: 010501


www.ps.bam.de/DE14/10F/F10E00FA.PS

i	LAB*ref	LAB*out, relative	LAB*out/c-ref	ΔE^*
1	30.5 3.96 -45.88	30.5 3.96 -45.88	0.0 0.0 0.0	0.01
2	34.59 3.74 -42.93	30.98 3.93 -45.53	-3.6 0.2 -2.59	4.45
3	38.68 3.51 -39.98	31.89 3.88 -44.88	-6.78 0.37 -4.89	8.39
4	42.77 3.29 -37.02	33.62 3.79 -43.63	-9.14 0.5 -6.6	11.3
5	46.86 3.07 -34.07	35.68 3.68 -42.14	-11.17 0.61 -8.06	13.8
6	50.95 2.85 -31.12	38.82 3.51 -39.88	-12.12 0.66 -8.75	14.98
7	55.04 2.62 -28.17	42.45 3.31 -37.25	-12.57 0.69 -9.07	15.53
8	59.13 2.4 -25.22	47.1 3.06 -33.9	-12.02 0.65 -8.67	14.85
9	63.21 2.18 -22.26	51.62 2.81 -30.63	-11.58 0.63 -8.36	14.31
10	67.3 1.96 -19.31	56.16 2.56 -27.35	-11.13 0.61 -8.03	13.75
11	71.39 1.73 -16.36	60.92 2.3 -23.92	-10.46 0.57 -7.55	12.93
12	75.48 1.51 -13.41	66.93 1.98 -19.58	-8.55 0.47 -6.17	10.56
13	79.57 1.29 -10.46	73.4 1.62 -14.91	-6.16 0.34 -4.44	7.62
14	83.66 1.07 -7.5	80.61 1.23 -9.7	-3.04 0.17 -2.19	3.76
15	87.75 0.84 -4.55	87.35 0.86 -4.84	-0.39 0.02 -0.28	0.5
16	91.84 0.62 -1.6	91.84 0.62 -1.6	0.0 0.0 0.0	0.01
17	30.5 3.96 -45.88	30.5 3.96 -45.88	0.0 0.0 0.0	0.01
18	45.84 3.13 -34.81	35.16 3.71 -42.51	-10.66 0.58 -7.69	13.17
19	61.17 2.29 -23.74	49.36 2.93 -32.27	-11.8 0.64 -8.52	14.58
20	76.5 1.46 -12.67	68.55 1.89 -18.42	-7.95 0.43 -5.74	9.83
21	91.84 0.62 -1.6	91.84 0.62 -1.6	0.0 0.0 0.0	0.01

Start output S1
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 91.84 - 30.5$
Regularity
 $g^* = 20.0$
Lightness gamut rel. to offset
 $f^* = 79.3$
 ΔL^* -gray variation
 $v^* = 0.0$
Mean CIELAB difference (16 steps)
 $\Delta E^*_{CIELAB} = 9.2$
Mean CIELAB difference (5 steps)
 $\Delta L^*_{CIELAB} = 7.5$
Mean colour reproduction index: $R^*_{ab,m} = 60$

Device: (F); Meas.: F10E00NA.PS; Date: 010501

www.ps.bam.de/DE14/10F/F10E00NA.PS

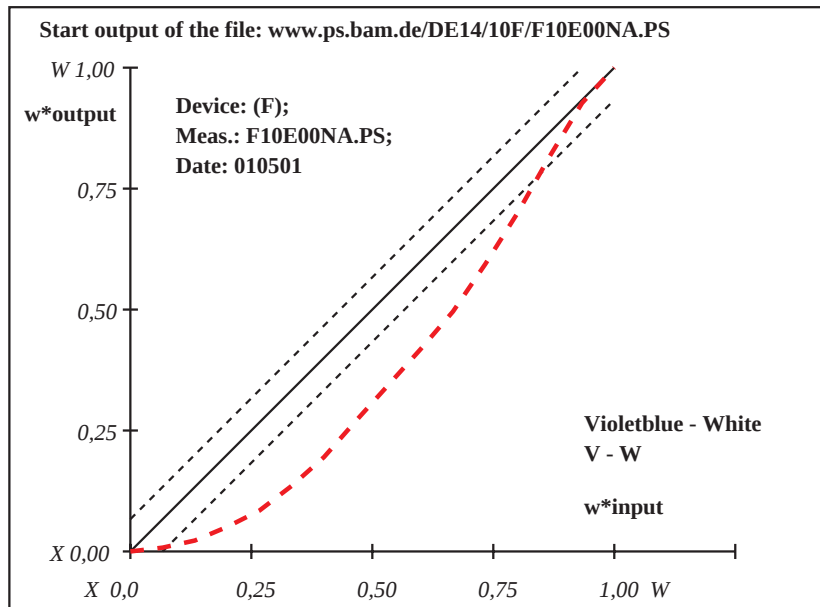

Device: (F); Meas.: F10E00NA.PS; Date: 010501


www.ps.bam.de/DE14/10F/F10E00NA.PS

i	LAB*ref	LAB*out, relative	LAB*out/c-ref	ΔE^*
1	30.36 5.05 -46.21	30.36 5.05 -46.21	0.0 0.0 0.0	0.01
2	34.44 4.72 -43.24	34.54 4.71 -43.17	0.1 0.0 0.07	0.12
3	38.52 4.39 -40.27	38.57 4.39 -40.23	0.05 0.0 0.04	0.06
4	42.6 4.06 -37.3	42.63 4.06 -37.27	0.03 0.0 0.02	0.04
5	46.68 3.73 -34.32	46.16 3.77 -34.71	-0.51 0.04 -0.37	0.65
6	50.76 3.4 -31.35	50.4 3.43 -31.62	-0.35 0.03 -0.25	0.45
7	54.84 3.07 -28.38	54.57 3.09 -28.58	-0.26 0.02 -0.19	0.33
8	58.92 2.74 -25.41	59.11 2.73 -25.28	0.18 0.0 0.13	0.23
9	63.01 2.41 -22.44	63.24 2.39 -22.27	0.23 -0.01 0.17	0.29
10	67.09 2.08 -19.47	66.86 2.1 -19.63	-0.21 0.02 -0.15	0.28
11	71.17 1.75 -16.5	70.55 1.8 -16.95	-0.61 0.05 -0.44	0.77
12	75.25 1.42 -13.53	74.51 1.48 -14.07	-0.73 0.06 -0.53	0.92
13	79.33 1.09 -10.55	78.35 1.17 -11.27	-0.97 0.08 -0.7	1.21
14	83.41 0.76 -7.58	82.01 0.87 -8.6	-1.39 0.11 -1.01	1.74
15	87.49 0.43 -4.61	86.1 0.54 -5.62	-1.38 0.11 -1.0	1.72
16	91.57 0.1 -1.64	91.57 0.1 -1.64	0.0 0.0 0.0	0.01
17	30.36 5.05 -46.21	30.36 5.05 -46.21	0.0 0.0 0.0	0.01
18	45.66 3.81 -35.07	45.28 3.84 -35.35	-0.37 0.03 -0.27	0.48
19	60.97 2.58 -23.93	61.17 2.56 -23.77	0.21 -0.01 0.15	0.26
20	76.27 1.34 -12.78	75.47 1.4 -13.37	-0.79 0.06 -0.57	0.99
21	91.57 0.1 -1.64	91.57 0.1 -1.64	0.0 0.0 0.0	0.01

Linearized output S2
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 91.57 - 30.36$
Regularity
 $g^* = 88.8$
Lightness gamut rel. to offset
 $f^* = 79.1$
 ΔL^* -gray variation
 $v^* = 0.0$
Mean CIELAB difference (16 steps)
 $\Delta E^*_{CIELAB} = 0.6$
Mean CIELAB difference (5 steps)
 $\Delta L^*_{CIELAB} = 0.3$
Mean colour reproduction index: $R^*_{ab,m} = 98$

Device: (F); Meas.: F10E00FA.PS; Date: 010501

www.ps.bam.de/DE14/10F/F10E00FA.PS

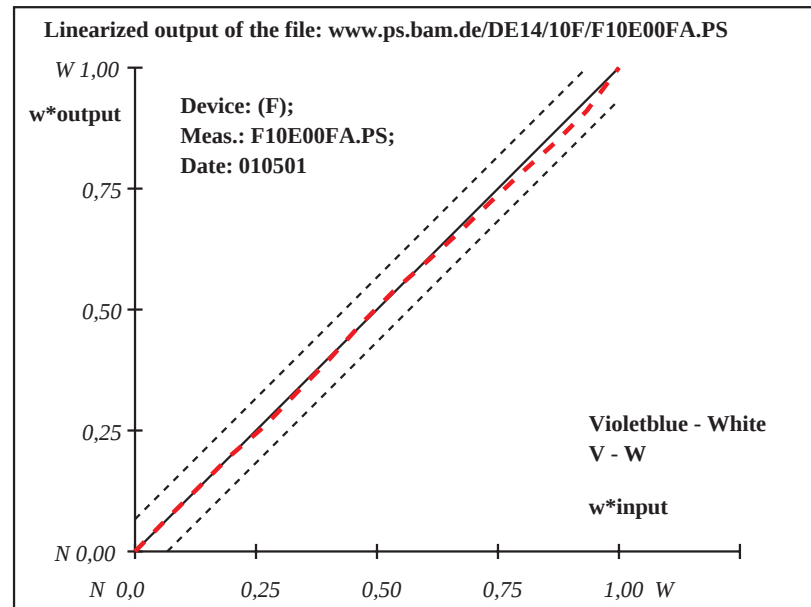


Device: (F); Meas.: F10E00FA.PS; Date: 010501

www.ps.bam.de/DE14/10F/F10E00FA.PS

i	LAB*ref			LAB*out, relative			LAB*out/c-ref			ΔE^*	Start output S1 Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G relative CIELAB data used for "out" $\Delta L^* = 92.03 - 7.61$ Regularity $g^* = 84.5$ Lightness gamut rel. to offset $f^* = 109.1$ ΔL^* -gray variation $v^* = 0.0$ Mean CIELAB difference (16 steps) $\Delta E^{*CIELAB} = 1.4$ Mean CIELAB difference (5 steps) $\Delta L^{*CIELAB} = 0.7$ Mean colour reproduction index: $R^*_{ab,m} = 94$
1	7.61	-4.72	4.13	7.61	-4.72	4.13	0.0	0.0	0.0	0.01	
2	13.24	-4.37	3.75	9.08	-4.63	4.03	-4.14	-0.25	0.28	4.17	
3	18.87	-4.02	3.38	14.35	-4.3	3.68	-4.51	-0.27	0.3	4.54	
4	24.49	-3.67	3.0	22.21	-3.81	3.15	-2.27	-0.13	0.15	2.29	
5	30.12	-3.32	2.62	29.2	-3.38	2.68	-0.91	-0.05	0.06	0.93	
6	35.75	-2.97	2.24	36.04	-2.95	2.22	0.29	0.02	-0.01	0.29	
7	41.38	-2.62	1.87	42.12	-2.57	1.82	0.74	0.05	-0.04	0.74	
8	47.01	-2.27	1.49	47.97	-2.21	1.42	0.97	0.06	-0.05	0.97	
9	52.63	-1.92	1.11	53.87	-1.84	1.03	1.23	0.08	-0.07	1.24	
10	58.26	-1.57	0.73	59.06	-1.52	0.68	0.8	0.05	-0.04	0.8	
11	63.89	-1.22	0.36	64.54	-1.18	0.31	0.65	0.04	-0.03	0.65	
12	69.52	-0.87	-0.01	70.53	-0.81	-0.08	1.01	0.06	-0.06	1.02	
13	75.15	-0.52	-0.39	76.5	-0.44	-0.48	1.36	0.08	-0.08	1.36	
14	80.77	-0.17	-0.77	82.8	-0.04	-0.9	2.02	0.13	-0.13	2.03	
15	86.4	0.17	-1.14	88.01	0.27	-1.25	1.61	0.1	-0.1	1.62	
16	92.03	0.52	-1.52	92.03	0.52	-1.52	0.0	0.0	0.0	0.01	
17	7.61	-4.72	4.13	7.61	-4.72	4.13	0.0	0.0	0.0	0.01	
18	28.72	-3.41	2.72	27.45	-3.49	2.8	-1.25	-0.07	0.08	1.27	
19	49.82	-2.1	1.3	50.92	-2.03	1.23	1.1	0.07	-0.06	1.11	
20	70.92	-0.78	-0.1	72.02	-0.71	-0.18	1.1	0.07	-0.06	1.1	
21	92.03	0.52	-1.52	92.03	0.52	-1.52	0.0	0.0	0.0	0.01	

Device: (F); Meas.: F10E00NA.PS; Date: 010501

www.ps.bam.de/DE14/10F/F10E00NA.PS

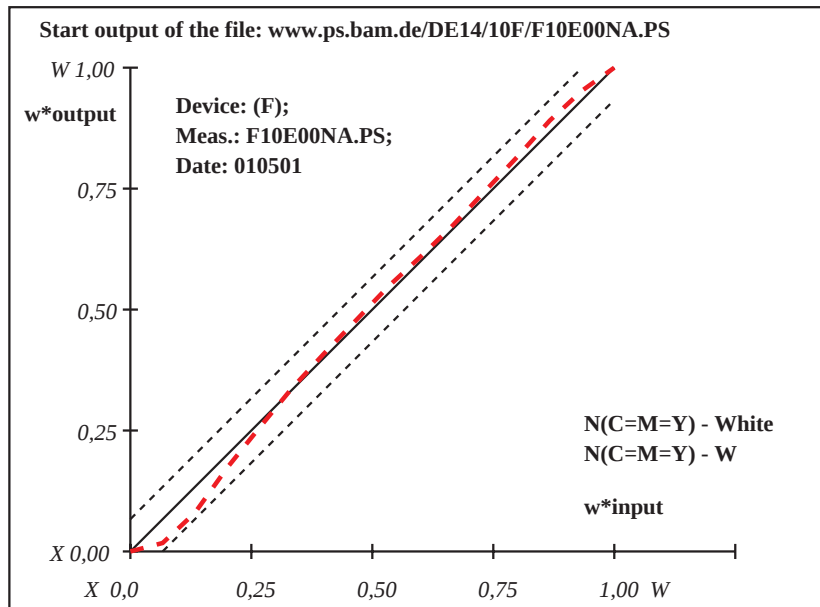


Device: (F); Meas.: F10E00NA.PS; Date: 010501

www.ps.bam.de/DE14/10F/F10E00NA.PS

i	LAB*ref			LAB*out, relative			LAB*out/c-ref			ΔE^*	Linearized output S2 Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G relative CIELAB data used for "out" $\Delta L^* = 91.66 - 8.62$ Regularity $g^* = 94.1$ Lightness gamut rel. to offset $f^* = 107.3$ ΔL^* -gray variation $v^* = 0.0$ Mean CIELAB difference (16 steps) $\Delta E^{*CIELAB} = 0.3$ Mean CIELAB difference (5 steps) $\Delta L^{*CIELAB} = 0.3$ Mean colour reproduction index: $R^*_{ab,m} = 99$
1	8.62	-5.49	4.73	8.62	-5.49	4.73	0.0	0.0	0.0	0.01	
2	14.16	-5.12	4.31	14.67	-5.09	4.27	0.52	0.03	-0.03	0.52	
3	19.69	-4.75	3.89	19.89	-4.74	3.87	0.2	0.01	-0.01	0.2	
4	25.23	-4.38	3.47	26.15	-4.32	3.4	0.93	0.06	-0.06	0.93	
5	30.76	-4.01	3.04	30.97	-4.0	3.03	0.21	0.01	-0.01	0.21	
6	36.3	-3.64	2.62	36.35	-3.64	2.62	0.05	0.0	0.0	0.05	
7	41.84	-3.27	2.2	41.89	-3.27	2.2	0.05	0.0	0.0	0.06	
8	47.37	-2.9	1.78	47.13	-2.92	1.8	-0.23	-0.01	0.02	0.25	
9	52.91	-2.53	1.36	52.3	-2.57	1.41	-0.59	-0.03	0.05	0.61	
10	58.44	-2.16	0.94	58.02	-2.19	0.97	-0.42	-0.02	0.03	0.43	
11	63.98	-1.79	0.52	63.78	-1.8	0.53	-0.19	0.0	0.01	0.2	
12	69.52	-1.42	0.1	69.04	-1.45	0.13	-0.47	-0.02	0.04	0.48	
13	75.05	-1.05	-0.32	74.71	-1.07	-0.29	-0.33	-0.01	0.03	0.34	
14	80.59	-0.68	-0.74	80.0	-0.72	-0.69	-0.57	-0.03	0.04	0.59	
15	86.12	-0.31	-1.16	85.76	-0.33	-1.13	-0.36	-0.01	0.03	0.37	
16	91.66	0.05	-1.58	91.66	0.05	-1.58	0.0	0.0	0.0	0.01	
17	8.62	-5.49	4.73	8.62	-5.49	4.73	0.0	0.0	0.0	0.01	
18	29.38	-4.1	3.15	29.77	-4.08	3.12	0.39	0.03	-0.02	0.39	
19	50.14	-2.72	1.57	49.72	-2.74	1.6	-0.41	-0.02	0.03	0.43	
20	70.9	-1.33	0.0	70.46	-1.36	0.02	-0.43	-0.02	0.03	0.45	
21	91.66	0.05	-1.58	91.66	0.05	-1.58	0.0	0.0	0.0	0.01	

Device: (F); Meas.: F10E00FA.PS; Date: 010501

www.ps.bam.de/DE14/10F/F10E00FA.PS

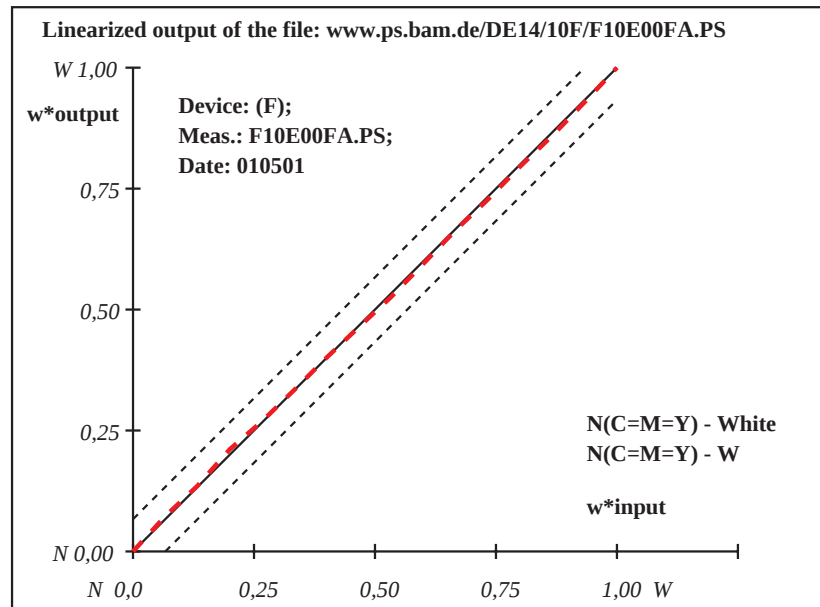

Device: (F); Meas.: F10E00FA.PS; Date: 010501

www.ps.bam.de/DE14/10F/F10E00FA.PS