


i	LAB*ref	LAB*out, relative	LAB*out/c-ref	ΔE^*	Start output S1
1	50.73 -28.58 -45.52	50.73 -28.58 -45.52	0.0 0.0 0.0	0.01	Specification according to
2	53.74 -26.67 -42.34	51.68 -27.98 -44.52	-2.05 -1.3 -2.17	3.27	ISO/IEC 15775 Annex G
3	56.75 -24.76 -39.17	51.7 -27.96 -44.49	-5.04 -3.19 -5.32	8.01	and DIN 33866-1 Annex G
4	59.76 -22.85 -35.99	52.13 -27.69 -44.04	-7.62 -4.83 -8.04	12.1	relative CIELAB data used for "out"
5	62.77 -20.94 -32.82	52.6 -27.39 -43.55	-10.16 -6.44 -10.72	16.13	$\Delta L^* = 95.89 - 50.73$
6	65.78 -19.03 -29.64	52.68 -27.34 -43.46	-13.09 -8.3 -13.81	20.78	Regularity
7	68.79 -17.12 -26.46	53.76 -26.66 -42.32	-15.02 -9.53 -15.85	23.84	$g^* = 9.1$
8	71.8 -15.21 -23.29	56.04 -25.21 -39.92	-15.75 -9.99 -16.62	25.0	
9	74.82 -13.3 -20.11	60.19 -22.58 -35.54	-14.62 -9.27 -15.42	23.2	Lightness gamut rel. to offset
10	77.83 -11.39 -16.94	63.73 -20.33 -31.8	-14.08 -8.93 -14.86	22.35	$f^* = 58.3$
11	80.84 -9.48 -13.76	70.85 -15.81 -24.29	-9.98 -6.32 -10.52	15.84	
12	83.85 -7.57 -10.58	77.08 -11.87 -17.73	-6.76 -4.29 -7.13	10.74	ΔL^* -gray variation
13	86.86 -5.66 -7.41	78.52 -10.95 -16.2	-8.32 -5.28 -8.78	13.22	$v^* = 0.0$
14	89.87 -3.75 -4.23	86.38 -5.97 -7.92	-3.48 -2.21 -3.67	5.54	
15	92.88 -1.84 -1.06	89.39 -4.05 -4.74	-3.48 -2.2 -3.67	5.53	Mean CIELAB difference (16 steps)
16	95.89 0.06 2.11	95.89 0.06 2.11	0.0 0.0 0.0	0.01	$\Delta E^*_{\text{CIELAB}} = 12.8$
17	50.73 -28.58 -45.52	50.73 -28.58 -45.52	0.0 0.0 0.0	0.01	
18	62.02 -21.42 -33.61	52.48 -27.47 -43.67	-9.53 -6.04 -10.05	15.12	
19	73.31 -14.26 -21.7	58.11 -23.9 -37.73	-15.19 -9.63 -16.02	24.1	
20	84.6 -7.09 -9.79	77.44 -11.64 -17.35	-7.15 -4.53 -7.55	11.36	Mean CIELAB difference (5 steps)
21	95.89 0.06 2.11	95.89 0.06 2.11	0.0 0.0 0.0	0.01	$\Delta L^*_{\text{CIELAB}} = 10.1$
Mean colour reproduction index: $R^*_{ab,m} = 44$					

Device: (O); Meas.: O10E00NP.PS; Date: 010501

www.ps.bam.de/DE14/100/O10E00NP.PS

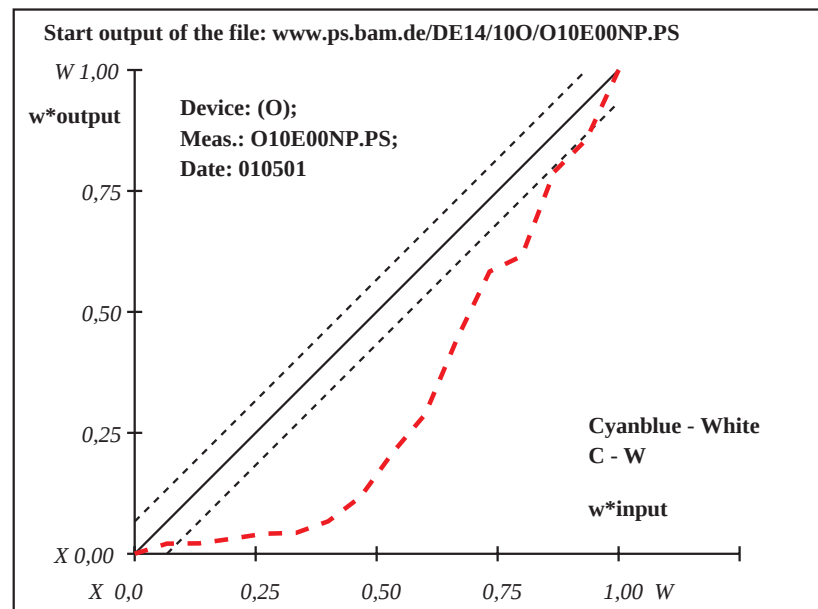

Device: (O); Meas.: O10E00NP.PS; Date: 010501


www.ps.bam.de/DE14/100/O10E00NP.PS

Output linearization of 16 colour steps according to ISO/IEC 15775; PS operator cmyn* setcmykcolor

i	LAB*ref	LAB*out, relative	LAB*out/c-ref	ΔE^*	Linearized output S2
1	47.55 -26.93 -46.02	47.55 -26.93 -46.02	0.0 0.0 0.0	0.01	Specification according to
2	50.75 -25.14 -42.81	55.47 -22.51 -38.09	4.72 2.64 4.72	7.18	ISO/IEC 15775 Annex G
3	53.96 -23.35 -39.61	58.39 -20.87 -35.16	4.44 2.48 4.44	6.75	and DIN 33866-1 Annex G
4	57.16 -21.56 -36.4	59.65 -20.17 -33.91	2.49 1.39 2.49	3.78	relative CIELAB data used for "out"
5	60.36 -19.77 -33.19	63.07 -18.26 -30.48	2.71 1.51 2.71	4.12	$\Delta L^* = 95.6 - 47.55$
6	63.57 -17.98 -29.99	65.52 -16.89 -28.03	1.96 1.09 1.96	2.98	Regularity
7	66.77 -16.19 -26.78	69.26 -14.8 -24.29	2.49 1.39 2.49	3.78	$g^* = 62.5$
8	69.97 -14.4 -23.57	70.59 -14.06 -22.96	0.61 0.34 0.61	0.93	
9	73.18 -12.62 -20.37	72.18 -13.17 -21.37	-0.99 -0.55 -0.99	1.52	Lightness gamut rel. to offset
10	76.38 -10.83 -17.16	76.68 -10.66 -16.86	0.3 0.17 0.3	0.45	$f^* = 62.1$
11	79.58 -9.04 -13.95	81.85 -7.77 -11.69	2.26 1.26 2.27	3.44	
12	82.79 -7.25 -10.75	83.8 -6.68 -9.74	1.01 0.56 1.01	1.53	ΔL^* -gray variation
13	85.99 -5.46 -7.54	86.55 -5.14 -6.98	0.56 0.31 0.56	0.86	$v^* = 0.0$
14	89.19 -3.67 -4.33	91.52 -2.37 -2.01	2.32 1.3 2.33	3.53	
15	92.4 -1.88 -1.13	93.31 -1.37 -0.21	0.91 0.51 0.92	1.39	Mean CIELAB difference (16 steps)
16	95.6 -0.09 2.07	95.6 -0.09 2.07	0.0 0.0 0.0	0.01	$\Delta E^*_{\text{CIELAB}} = 2.6$
17	47.55 -26.93 -46.02	47.55 -26.93 -46.02	0.0 0.0 0.0	0.01	
18	59.56 -20.22 -33.99	62.22 -18.74 -31.34	2.65 1.48 2.66	4.04	
19	71.57 -13.51 -21.97	71.38 -13.62 -22.16	-0.18 -0.1 -0.18	0.3	
20	83.59 -6.8 -9.95	84.48 -6.3 -9.05	0.9 0.5 0.9	1.36	Mean CIELAB difference (5 steps)
21	95.6 -0.09 2.07	95.6 -0.09 2.07	0.0 0.0 0.0	0.01	$\Delta L^*_{\text{CIELAB}} = 1.1$
Mean colour reproduction index: $R^*_{ab,m} = 89$					

Device: (O); Meas.: O10E00FP.PS; Date: 010501

www.ps.bam.de/DE14/100/O10E00FP.PS

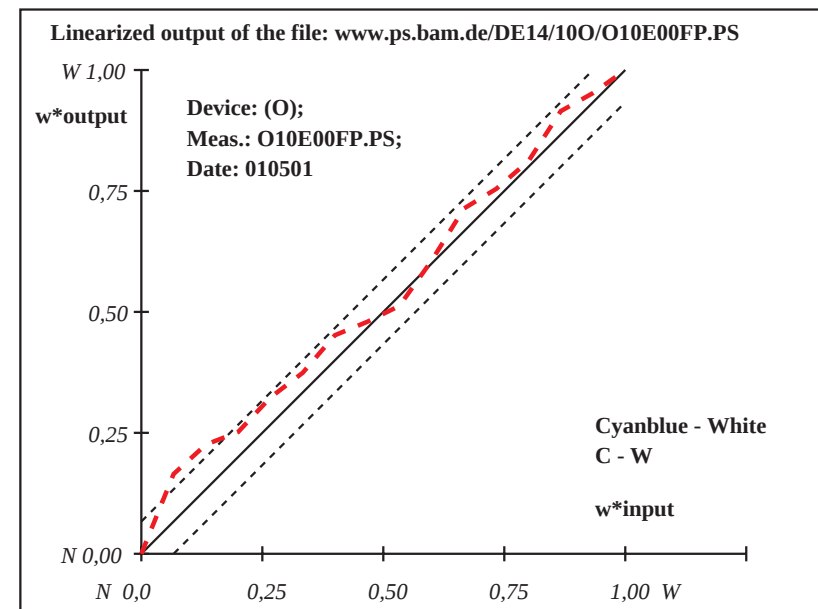


Device: (O); Meas.: O10E00FP.PS; Date: 010501

www.ps.bam.de/DE14/100/O10E00FP.PS

i	LAB*ref			LAB*out, relative			LAB*out/c-ref			ΔE^*	Start output S1 Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G relative CIELAB data used for "out" $\Delta L^* = 95.91 - 43.28$ Regularity $g^* = 25.4$ Lightness gamut rel. to offset $f^* = 68.0$ ΔL^*-gray variation $v^* = 0.0$ Mean CIELAB difference (16 steps) $\Delta E^*_{CIELAB} = 7.0$ Mean CIELAB difference (5 steps) $\Delta L^*_{CIELAB} = 5.5$ Mean colour reproduction index: $R^*_{ab,m} = 69$
1	43.28	75.06	4.48	43.28	75.06	4.48	0.0	0.0	0.0	0.01	
2	46.79	70.08	4.31	44.16	73.81	4.44	-2.62	3.73	0.12	4.56	
3	50.3	65.1	4.15	46.1	71.06	4.35	-4.19	5.96	0.2	7.29	
4	53.81	60.13	3.98	47.2	69.5	4.3	-6.6	9.37	0.31	11.47	
5	57.31	55.15	3.82	48.56	67.57	4.23	-8.74	12.42	0.41	15.2	
6	60.82	50.17	3.65	52.51	61.96	4.04	-8.3	11.79	0.39	14.43	
7	64.33	45.19	3.49	57.89	54.34	3.79	-6.43	9.14	0.3	11.19	
8	67.84	40.21	3.32	60.15	51.12	3.68	-7.68	10.91	0.36	13.35	
9	71.35	35.24	3.16	65.18	43.99	3.45	-6.16	8.76	0.29	10.72	
10	74.86	30.26	2.99	70.76	36.08	3.19	-4.09	5.82	0.19	7.12	
11	78.37	25.28	2.83	76.93	27.31	2.89	-1.42	2.03	0.07	2.49	
12	81.88	20.3	2.66	80.59	22.12	2.72	-1.27	1.82	0.06	2.23	
13	85.38	15.32	2.5	86.74	13.4	2.43	1.35	-1.91	-0.05	2.35	
14	88.89	10.35	2.33	91.97	5.98	2.19	3.07	-4.35	-0.13	5.34	
15	92.4	5.37	2.17	95.18	1.42	2.03	2.78	-3.93	-0.12	4.83	
16	95.91	0.39	2.0	95.91	0.39	2.0	0.0	0.0	0.0	0.01	
17	43.28	75.06	4.48	43.28	75.06	4.48	0.0	0.0	0.0	0.01	
18	56.44	56.39	3.86	48.22	68.05	4.25	-8.21	11.66	0.39	14.27	
19	69.6	37.72	3.24	62.67	47.56	3.57	-6.92	9.83	0.33	12.03	
20	82.75	19.06	2.62	82.13	19.94	2.65	-0.61	0.88	0.03	1.08	
21	95.91	0.39	2.0	95.91	0.39	2.0	0.0	0.0	0.0	0.01	

Device: (O); Meas.: O10E00NP.PS; Date: 010501

www.ps.bam.de/DE14/100/O10E00NP.PS

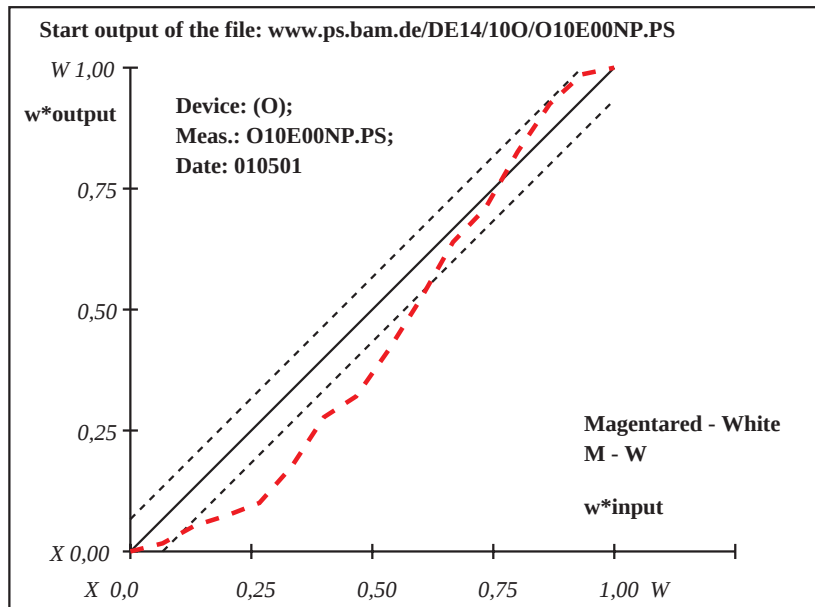


Device: (O); Meas.: O10E00NP.PS; Date: 010501

www.ps.bam.de/DE14/100/O10E00NP.PS

i	LAB*ref			LAB*out, relative			LAB*out/c-ref			ΔE^*	Linearized output S2 Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G relative CIELAB data used for "out" $\Delta L^* = 95.82 - 42.17$ Regularity $g^* = 82.1$ Lightness gamut rel. to offset $f^* = 69.3$ ΔL^*-gray variation $v^* = 0.0$ Mean CIELAB difference (16 steps) $\Delta E^*_{CIELAB} = 1.6$ Mean CIELAB difference (5 steps) $\Delta L^*_{CIELAB} = 1.1$ Mean colour reproduction index: $R^*_{ab,m} = 93$
1	42.17	74.39	5.86	42.17	74.39	5.86	0.0	0.0	0.0	0.01	
2	45.75	69.42	5.61	47.9	66.42	5.46	2.16	-2.99	-0.14	3.7	
3	49.32	64.44	5.36	51.68	61.16	5.19	2.36	-3.27	-0.16	4.05	
4	52.9	59.47	5.1	54.61	57.09	4.98	1.71	-2.37	-0.11	2.94	
5	56.48	54.5	4.85	57.36	53.27	4.79	0.88	-1.22	-0.05	1.51	
6	60.05	49.53	4.6	60.64	48.71	4.56	0.59	-0.81	-0.03	1.01	
7	63.63	44.55	4.35	64.94	42.74	4.26	1.31	-1.8	-0.08	2.24	
8	67.21	39.58	4.1	67.37	39.35	4.08	0.17	-0.22	0.0	0.29	
9	70.78	34.61	3.84	71.7	33.34	3.78	0.92	-1.26	-0.05	1.57	
10	74.36	29.64	3.59	74.84	28.97	3.56	0.48	-0.66	-0.02	0.82	
11	77.94	24.66	3.34	78.24	24.24	3.32	0.3	-0.41	-0.01	0.52	
12	81.51	19.69	3.09	83.29	17.23	2.96	1.77	-2.45	-0.11	3.04	
13	85.09	14.72	2.84	85.82	13.7	2.78	0.73	-1.01	-0.04	1.25	
14	88.67	9.75	2.58	89.61	8.43	2.52	0.95	-1.31	-0.06	1.62	
15	92.24	4.77	2.33	91.61	5.65	2.38	-0.62	0.88	0.04	1.09	
16	95.82	-0.19	2.08	95.82	-0.19	2.08	0.0	0.0	0.0	0.01	
17	42.17	74.39	5.86	42.17	74.39	5.86	0.0	0.0	0.0	0.01	
18	55.58	55.74	4.92	56.67	54.23	4.84	1.09	-1.51	-0.07	1.87	
19	68.99	37.1	3.97	69.54	36.34	3.93	0.54	-0.74	-0.03	0.93	
20	82.41	18.45	3.03	83.92	16.35	2.92	1.51	-2.09	-0.1	2.59	
21	95.82	-0.19	2.08	95.82	-0.19	2.08	0.0	0.0	0.0	0.01	

Device: (O); Meas.: O10E00FP.PS; Date: 010501

www.ps.bam.de/DE14/100/O10E00FP.PS

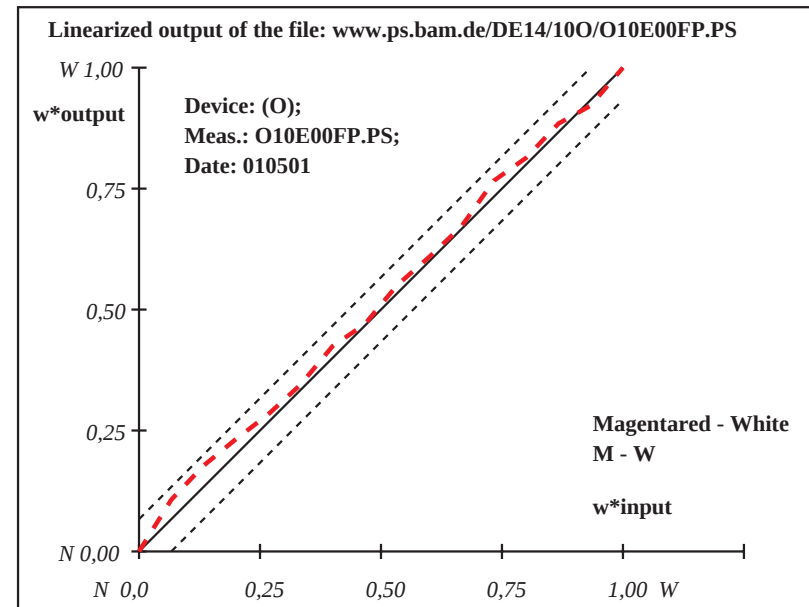

Device: (O); Meas.: O10E00FP.PS; Date: 010501


www.ps.bam.de/DE14/100/O10E00FP.PS

i	LAB*ref	LAB*out, relative	LAB*out/c-ref	ΔE^*
1	91.85 -17.48	109.75 91.85 -17.48 109.75	0.0 0.0 0.0	0.01
2	92.13 -16.3	102.58 92.17 -16.12 101.48	0.04 0.18 -1.09	1.12
3	92.41 -15.12	95.41 92.35 -15.38 96.96	-0.05 -0.25 1.55	1.58
4	92.69 -13.95	88.24 92.42 -15.09 95.19	-0.26 -1.13 6.96	7.06
5	92.98 -12.77	81.06 92.65 -14.15 89.47	-0.32 -1.37 8.41	8.53
6	93.26 -11.59	73.89 92.87 -13.22 83.79	-0.38 -1.62 9.9	10.04
7	93.54 -10.41	66.72 93.23 -11.68 74.46	-0.29 -1.26 7.74	7.85
8	93.82 -9.23	59.55 93.36 -11.18 71.37	-0.45 -1.93 11.82	11.98
9	94.1 -8.06	52.38 93.63 -10.03 64.39	-0.46 -1.96 12.01	12.18
10	94.38 -6.88	45.21 94.0 -8.46 54.87	-0.37 -1.58 9.66	9.8
11	94.66 -5.7	38.04 94.07 -8.18 53.13	-0.58 -2.47 15.09	15.31
12	94.94 -4.52	30.87 94.67 -5.66 37.8	-0.26 -1.13 6.93	7.03
13	95.23 -3.34	23.69 94.96 -4.47 30.55	-0.26 -1.12 6.86	6.95
14	95.51 -2.17	16.52 95.14 -3.71 25.94	-0.36 -1.54 9.41	9.55
15	95.79 -0.99	9.35 95.74 -1.21 10.71	-0.04 -0.21 1.36	1.38
16	96.07 0.18	2.18 96.07 0.18 2.18	0.0 0.0 0.0	0.01
17	91.85 -17.48	109.75 91.85 -17.48 109.75	0.0 0.0 0.0	0.01
18	92.91 -13.06	82.86 92.59 -14.38 90.9	-0.31 -1.31 8.05	8.16
19	93.96 -8.65	55.97 93.49 -10.6 67.88	-0.46 -1.95 11.91	12.08
20	95.02 -4.23	29.07 94.74 -5.36 35.98	-0.26 -1.13 6.91	7.01
21	96.07 0.18	2.18 96.07 0.18 2.18	0.0 0.0 0.0	0.01

Start output S1
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 96.07 - 91.85$
Regularity
 $g^* = 55.8$
Lightness gamut rel. to offset
 $f^* = 5.5$
 ΔL^* -gray variation
 $v^* = 0.0$
Mean CIELAB difference (16 steps)
 $\Delta E^*_{CIELAB} = 6.9$
Mean CIELAB difference (5 steps)
 $\Delta L^*_{CIELAB} = 5.5$
Mean colour reproduction index: $R^*_{ab,m} = 70$

Device: (O); Meas.: O10E00NP.PS; Date: 010501

www.ps.bam.de/DE14/100/O10E00NP.PS

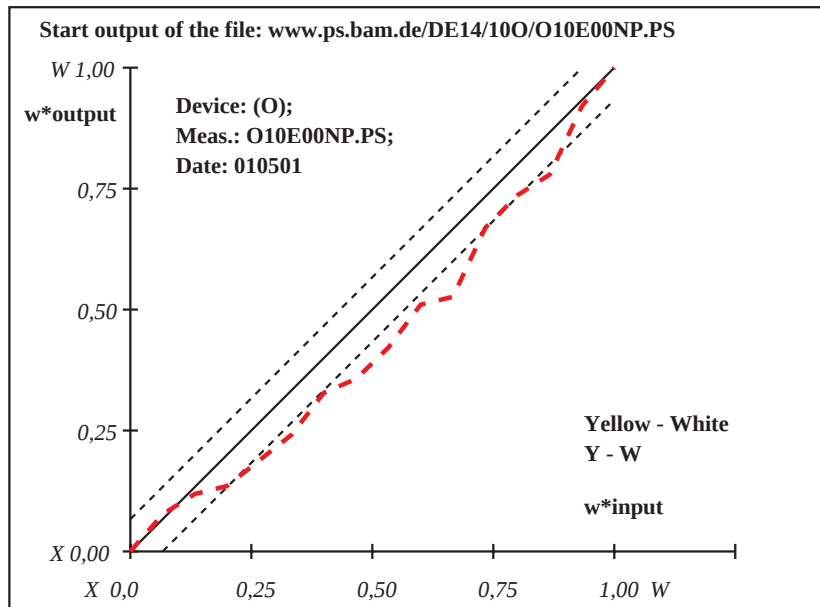

Device: (O); Meas.: O10E00NP.PS; Date: 010501


www.ps.bam.de/DE14/100/O10E00NP.PS

i	LAB*ref	LAB*out, relative	LAB*out/c-ref	ΔE^*
1	90.12 -16.36	107.21 90.12 -16.36 107.21	0.0 0.0 0.0	0.01
2	90.5 -15.28	100.2 90.46 -15.39 100.87	-0.03 -0.09 0.66	0.67
3	90.87 -14.21	93.2 91.03 -13.76 90.3	0.16 0.45 -2.89	2.94
4	91.25 -13.13	86.19 91.35 -12.84 84.27	0.1 0.29 -1.91	1.95
5	91.62 -12.06	79.18 91.48 -12.47 81.84	-0.13 -0.4 2.65	2.69
6	92.0 -10.98	72.18 91.82 -11.5 75.55	-0.17 -0.51 3.38	3.42
7	92.38 -9.91	65.17 92.34 -10.01 65.86	-0.03 -0.1 0.69	0.7
8	92.75 -8.83	58.16 92.58 -9.32 61.33	-0.16 -0.48 3.17	3.21
9	93.13 -7.76	51.16 93.41 -6.96 45.94	0.28 0.8 -5.21	5.29
10	93.5 -6.68	44.15 93.63 -6.31 41.75	0.13 0.37 -2.39	2.43
11	93.88 -5.61	37.14 93.84 -5.72 37.91	-0.03 -0.11 0.77	0.78
12	94.26 -4.53	30.14 94.32 -4.35 28.95	0.06 0.18 -1.18	1.21
13	94.63 -3.46	23.13 94.82 -2.91 19.58	0.19 0.54 -3.54	3.59
14	95.01 -2.38	16.12 95.1 -2.11 14.33	0.1 0.28 -1.78	1.82
15	95.38 -1.31	9.12 95.34 -1.43 9.95	-0.03 -0.12 0.83	0.84
16	95.76 -0.23	2.11 95.76 -0.23 2.11	0.0 0.0 0.0	0.01
17	90.12 -16.36	107.21 90.12 -16.36 107.21	0.0 0.0 0.0	0.01
18	91.53 -12.33	80.94 91.45 -12.56 82.45	-0.07 -0.22 1.51	1.53
19	92.94 -8.3	54.66 92.99 -8.14 53.64	0.05 0.16 -1.01	1.04
20	94.35 -4.26	28.39 94.45 -3.99 26.61	0.1 0.27 -1.77	1.8
21	95.76 -0.23	2.11 95.76 -0.23 2.11	0.0 0.0 0.0	0.01

Linearized output S2
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 95.76 - 90.12$
Regularity
 $g^* = 85.0$
Lightness gamut rel. to offset
 $f^* = 7.3$
 ΔL^* -gray variation
 $v^* = 0.0$
Mean CIELAB difference (16 steps)
 $\Delta E^*_{CIELAB} = 2.0$
Mean CIELAB difference (5 steps)
 $\Delta L^*_{CIELAB} = 0.9$
Mean colour reproduction index: $R^*_{ab,m} = 92$

Device: (O); Meas.: O10E00FP.PS; Date: 010501

www.ps.bam.de/DE14/100/O10E00FP.PS

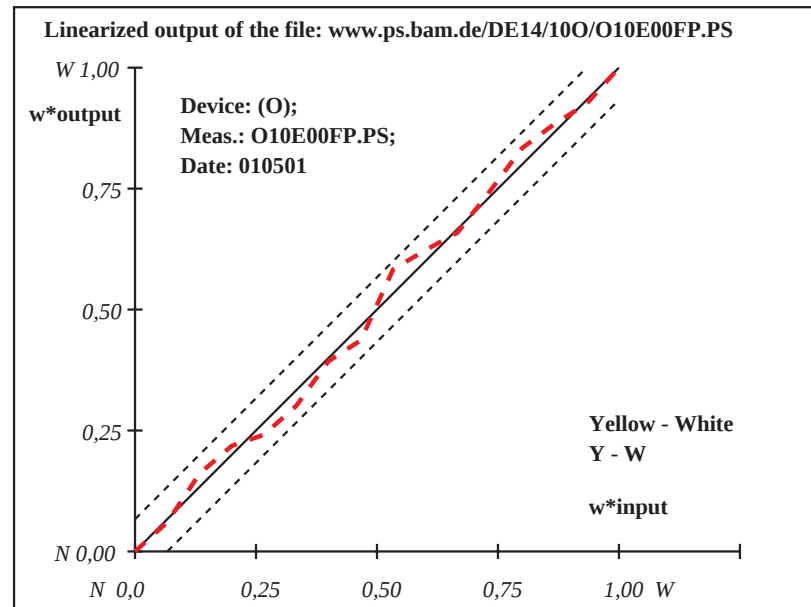

Device: (O); Meas.: O10E00FP.PS; Date: 010501


www.ps.bam.de/DE14/100/O10E00FP.PS

Output linearization of 16 colour steps according to ISO/IEC 15775; PS operator cmyn* setcmykcolor

i	LAB*ref			LAB*out, relative			LAB*out/c-ref			ΔE^*	Start output S1	
1	26.09	1.6	1.76	26.09	1.6	1.76	0.0	0.0	0.0	0.01	Specification according to	
2	30.75	1.52	1.78	28.56	1.56	1.77	-2.18	0.04	0.0	2.19	ISO/IEC 15775 Annex G	
3	35.4	1.44	1.81	31.43	1.51	1.79	-3.97	0.07	-0.01	3.98	and DIN 33866-1 Annex G	
4	40.06	1.36	1.83	35.96	1.43	1.81	-4.09	0.07	-0.01	4.1	relative CIELAB data used for "out"	
5	44.72	1.28	1.85	39.72	1.37	1.83	-4.99	0.09	-0.02	5.0	$\Delta L^* = 95.95 - 26.09$	
6	49.38	1.2	1.88	45.2	1.27	1.86	-4.17	0.07	-0.01	4.18	Regularity	
7	54.03	1.12	1.9	49.28	1.2	1.88	-4.74	0.08	-0.01	4.75	$g^* = 61.8$	
8	58.69	1.04	1.92	54.32	1.12	1.9	-4.36	0.08	-0.01	4.37	Lightness gamut rel. to offset	
9	63.35	0.96	1.95	60.13	1.02	1.93	-3.21	0.06	-0.01	3.22	$f^* = 90.3$	
10	68.01	0.88	1.97	67.24	0.89	1.97	-0.75	0.01	0.0	0.76	ΔL^* -gray variation	
11	72.66	0.8	1.99	72.03	0.81	1.99	-0.63	0.01	0.0	0.64	$v^* = 0.0$	
12	77.32	0.72	2.02	76.58	0.73	2.01	-0.73	0.01	0.0	0.74	Mean CIELAB difference (16 steps)	
13	81.98	0.64	2.04	81.3	0.65	2.04	-0.66	0.01	0.0	0.67	$\Delta E^*_{CIELAB} = 2.2$	
14	86.64	0.56	2.06	86.85	0.56	2.06	0.21	0.0	0.0	0.21	Mean CIELAB difference (5 steps)	
15	91.29	0.48	2.09	91.87	0.47	2.09	0.58	0.0	0.0	0.58	$\Delta L^*_{CIELAB} = 1.9$	
16	95.95	0.4	2.11	95.95	0.4	2.11	0.0	0.0	0.0	0.01	Mean colour reproduction index: $R^*_{ab,m} = 90$	
17	26.09	1.6	1.76	26.09	1.6	1.76	0.0	0.0	0.0	0.01		
18	43.56	1.3	1.85	38.78	1.38	1.82	-4.77	0.08	-0.01	4.78		
19	61.02	1.0	1.94	57.23	1.07	1.92	-3.78	0.07	-0.01	3.79		
20	78.49	0.7	2.02	77.76	0.71	2.02	-0.72	0.01	0.0	0.73		
21	95.95	0.4	2.11	95.95	0.4	2.11	0.0	0.0	0.0	0.01		

Device: (O); Meas.: O10E00NP.PS; Date: 010501

www.ps.bam.de/DE14/100/O10E00NP.PS

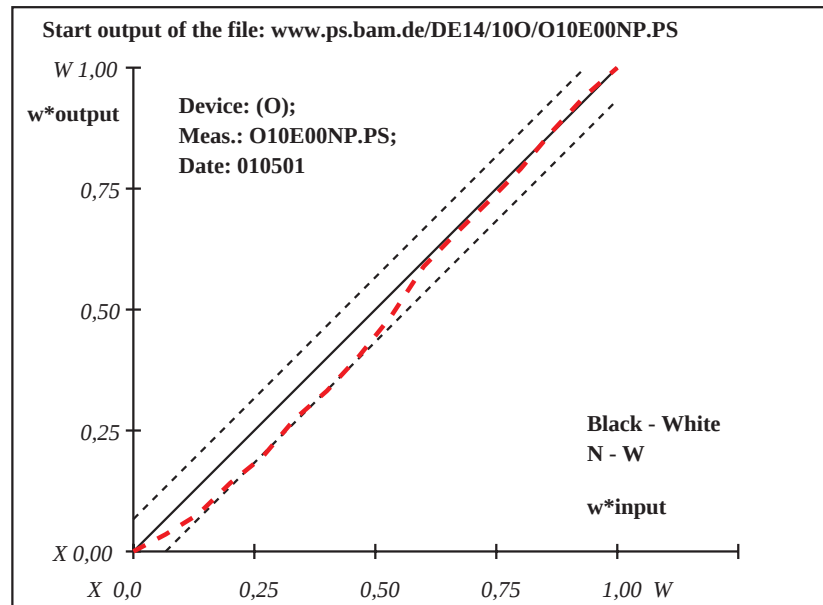


Device: (O); Meas.: O10E00NP.PS; Date: 010501

www.ps.bam.de/DE14/100/O10E00NP.PS

i	LAB*ref			LAB*out, relative			LAB*out/c-ref			ΔE^*	Linearized output S2	
1	28.3	1.23	2.13	28.3	1.23	2.13	0.0	0.0	0.0	0.01	Specification according to	
2	32.81	1.14	2.13	34.27	1.11	2.13	1.47	-0.02	0.0	1.47	ISO/IEC 15775 Annex G	
3	37.32	1.05	2.12	39.06	1.02	2.12	1.75	-0.02	0.0	1.75	and DIN 33866-1 Annex G	
4	41.82	0.97	2.12	44.4	0.92	2.12	2.58	-0.04	0.0	2.58	relative CIELAB data used for "out"	
5	46.33	0.88	2.12	48.8	0.83	2.12	2.47	-0.04	0.0	2.47	$\Delta L^* = 95.92 - 28.3$	
6	50.84	0.79	2.12	52.66	0.75	2.12	1.82	-0.03	0.0	1.82	Regularity	
7	55.35	0.7	2.11	56.42	0.68	2.11	1.07	-0.01	0.0	1.07	$g^* = 80.2$	
8	59.86	0.61	2.11	61.12	0.59	2.11	1.26	-0.01	0.0	1.26	Lightness gamut rel. to offset	
9	64.36	0.53	2.11	66.09	0.49	2.11	1.72	-0.02	0.0	1.72	$f^* = 87.4$	
10	68.87	0.44	2.11	68.64	0.44	2.11	-0.22	0.0	0.0	0.23	ΔL^* -gray variation	
11	73.38	0.35	2.1	74.9	0.32	2.1	1.52	-0.02	0.0	1.52	$v^* = 0.0$	
12	77.89	0.26	2.1	79.27	0.23	2.1	1.38	-0.02	0.0	1.38	Mean CIELAB difference (16 steps)	
13	82.4	0.17	2.1	83.58	0.15	2.1	1.18	-0.01	0.0	1.18	$\Delta E^*_{CIELAB} = 1.2$	
14	86.9	0.09	2.1	88.22	0.06	2.09	1.32	-0.02	0.0	1.32	Mean CIELAB difference (5 steps)	
15	91.41	0.0	2.09	91.48	0.0	2.09	0.06	0.0	0.0	0.07	Mean colour reproduction index: $R^*_{ab,m} = 94$	
16	95.92	-0.08	2.09	95.92	-0.08	2.09	0.0	0.0	0.0	0.01		
17	28.3	1.23	2.13	28.3	1.23	2.13	0.0	0.0	0.0	0.01		
18	45.21	0.9	2.12	47.7	0.85	2.12	2.5	-0.04	0.0	2.5		
19	62.11	0.57	2.11	63.6	0.54	2.11	1.49	-0.02	0.0	1.49		
20	79.02	0.24	2.1	80.35	0.21	2.1	1.33	-0.02	0.0	1.33		
21	95.92	-0.08	2.09	95.92	-0.08	2.09	0.0	0.0	0.0	0.01		

Device: (O); Meas.: O10E00FP.PS; Date: 010501

www.ps.bam.de/DE14/100/O10E00FP.PS

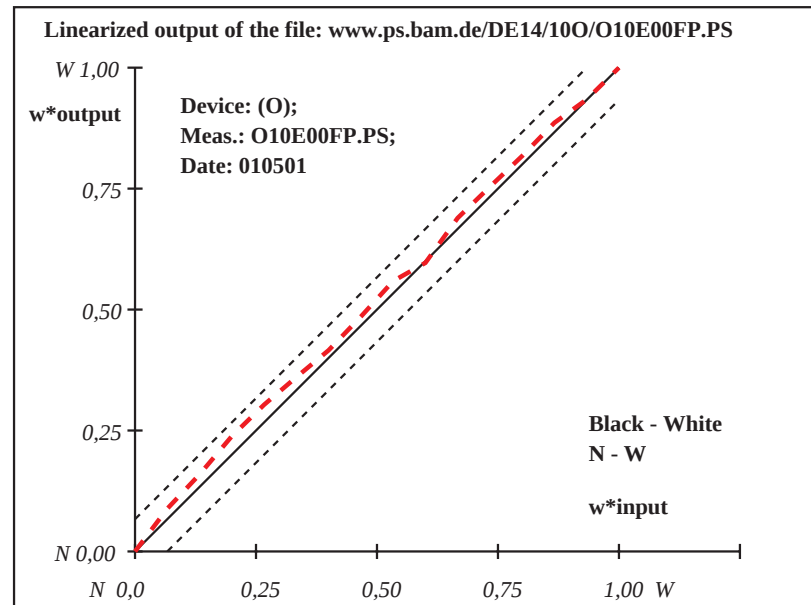


Device: (O); Meas.: O10E00FP.PS; Date: 010501

www.ps.bam.de/DE14/100/O10E00FP.PS

i	LAB*ref			LAB*out, relative			LAB*out/c-ref			ΔE^*	Start output S1 Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G relative CIELAB data used for "out" $\Delta L^* = 96.11 - 42.85$ Regularity $g^* = 30.9$ Lightness gamut rel. to offset $f^* = 68.8$ ΔL^* -gray variation $v^* = 0.0$ Mean CIELAB difference (16 steps) $\Delta E^{*CIELAB} = 7.8$ Mean CIELAB difference (5 steps) $\Delta L^{*CIELAB} = 6.0$ Mean colour reproduction index: $R^*_{ab,m} = 66$
1	42.85	66.24	41.21	42.85	66.24	41.21	0.0	0.0	0.0	0.01	
2	46.4	61.84	38.6	44.07	64.73	40.31	-2.32	2.89	1.71	4.09	
3	49.95	57.45	35.99	45.13	63.42	39.54	-4.81	5.97	3.55	8.46	
4	53.5	53.05	33.38	47.01	61.09	38.15	-6.48	8.04	4.77	11.38	
5	57.05	48.66	30.77	49.66	57.81	36.2	-7.38	9.15	5.43	12.96	
6	60.6	44.26	28.16	51.03	56.12	35.2	-9.57	11.86	7.04	16.79	
7	64.15	39.86	25.55	54.93	51.28	32.33	-9.21	11.42	6.78	16.17	
8	67.7	35.47	22.94	58.1	47.35	30.0	-9.59	11.89	7.06	16.83	
9	71.26	31.07	20.33	64.25	39.75	25.48	-7.0	8.68	5.15	12.29	
10	74.81	26.68	17.72	69.42	33.35	21.68	-5.38	6.67	3.96	9.45	
11	78.36	22.28	15.11	75.71	25.56	17.06	-2.64	3.28	1.95	4.64	
12	81.91	17.88	12.5	79.38	21.02	14.36	-2.52	3.13	1.86	4.44	
13	85.46	13.49	9.89	86.12	12.67	9.41	0.66	-0.81	-0.47	1.16	
14	89.01	9.09	7.28	90.59	7.14	6.12	1.58	-1.95	-1.15	2.77	
15	92.56	4.7	4.67	94.46	2.34	3.27	1.9	-2.35	-1.39	3.34	
16	96.11	0.3	2.06	96.11	0.3	2.06	0.0	0.0	0.0	0.01	
17	42.85	66.24	41.21	42.85	66.24	41.21	0.0	0.0	0.0	0.01	
18	56.17	49.75	31.42	49.0	58.63	36.69	-7.16	8.88	5.27	12.57	
19	69.48	33.27	21.64	61.18	43.55	27.74	-8.29	10.28	6.1	14.56	
20	82.8	16.79	11.85	81.06	18.93	13.12	-1.72	2.15	1.27	3.04	
21	96.11	0.3	2.06	96.11	0.3	2.06	0.0	0.0	0.0	0.01	

Device: (O); Meas.: O10E00NP.PS; Date: 010501

www.ps.bam.de/DE14/100/O10E00NP.PS

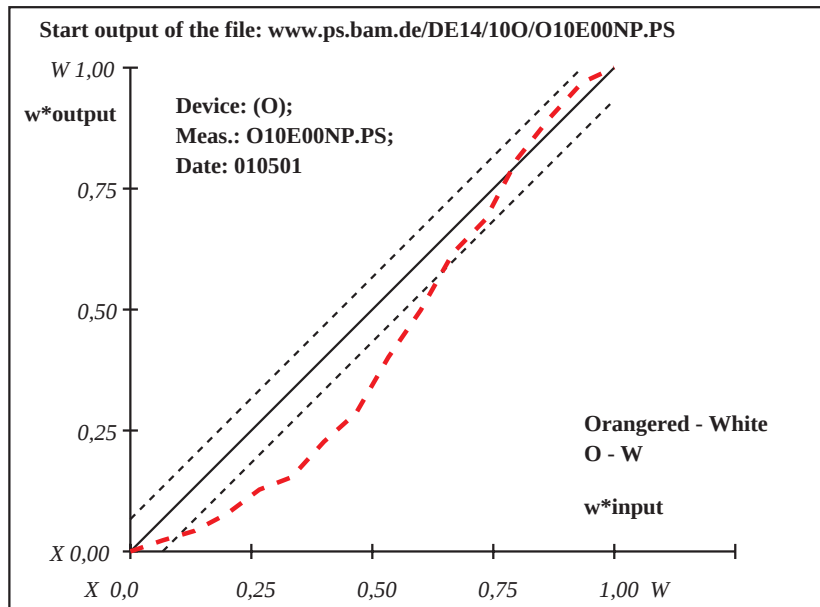


Device: (O); Meas.: O10E00NP.PS; Date: 010501

www.ps.bam.de/DE14/100/O10E00NP.PS

i	LAB*ref			LAB*out, relative			LAB*out/c-ref			ΔE^*	Linearized output S2 Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G relative CIELAB data used for "out" $\Delta L^* = 95.81 - 42.57$ Regularity $g^* = 83.6$ Lightness gamut rel. to offset $f^* = 68.8$ ΔL^* -gray variation $v^* = 0.0$ Mean CIELAB difference (16 steps) $\Delta E^{*CIELAB} = 1.1$ Mean CIELAB difference (5 steps) $\Delta L^{*CIELAB} = 1.0$ Mean colour reproduction index: $R^*_{ab,m} = 95$
1	42.57	64.94	39.59	42.57	64.94	39.59	0.0	0.0	0.0	0.01	
2	46.12	60.6	37.09	46.45	60.2	36.85	0.33	-0.39	-0.22	0.57	
3	49.67	56.26	34.58	49.27	56.75	34.87	-0.39	0.49	0.28	0.69	
4	53.22	51.93	32.08	53.87	51.13	31.62	0.65	-0.79	-0.45	1.13	
5	56.77	47.59	29.58	58.35	45.65	28.46	1.58	-1.93	-1.11	2.74	
6	60.32	43.25	27.08	61.45	41.87	26.28	1.13	-1.37	-0.79	1.96	
7	63.87	38.91	24.57	64.82	37.75	23.9	0.95	-1.15	-0.66	1.65	
8	67.42	34.57	22.07	67.53	34.44	21.99	0.11	-0.13	-0.07	0.19	
9	70.96	30.24	19.57	71.62	29.44	19.11	0.65	-0.79	-0.45	1.13	
10	74.51	25.9	17.07	75.14	25.13	16.62	0.63	-0.76	-0.43	1.09	
11	78.06	21.56	14.56	79.28	20.07	13.7	1.22	-1.48	-0.85	2.11	
12	81.61	17.22	12.06	83.01	15.52	11.08	1.39	-1.69	-0.97	2.41	
13	85.16	12.88	9.56	85.19	12.85	9.54	0.03	-0.03	-0.01	0.05	
14	88.71	8.55	7.06	89.59	7.47	6.44	0.88	-1.06	-0.61	1.52	
15	92.26	4.21	4.55	91.96	4.57	4.76	-0.29	0.37	0.21	0.52	
16	95.81	-0.12	2.05	95.81	-0.12	2.05	0.0	0.0	0.0	0.01	
17	42.57	64.94	39.59	42.57	64.94	39.59	0.0	0.0	0.0	0.01	
18	55.88	48.67	30.21	57.23	47.02	29.25	1.35	-1.64	-0.94	2.34	
19	69.19	32.41	20.82	69.57	31.94	20.55	0.38	-0.46	-0.26	0.66	
20	82.5	16.14	11.44	83.55	14.85	10.69	1.05	-1.28	-0.73	1.82	
21	95.81	-0.12	2.05	95.81	-0.12	2.05	0.0	0.0	0.0	0.01	

Device: (O); Meas.: O10E00FP.PS; Date: 010501

www.ps.bam.de/DE14/100/O10E00FP.PS

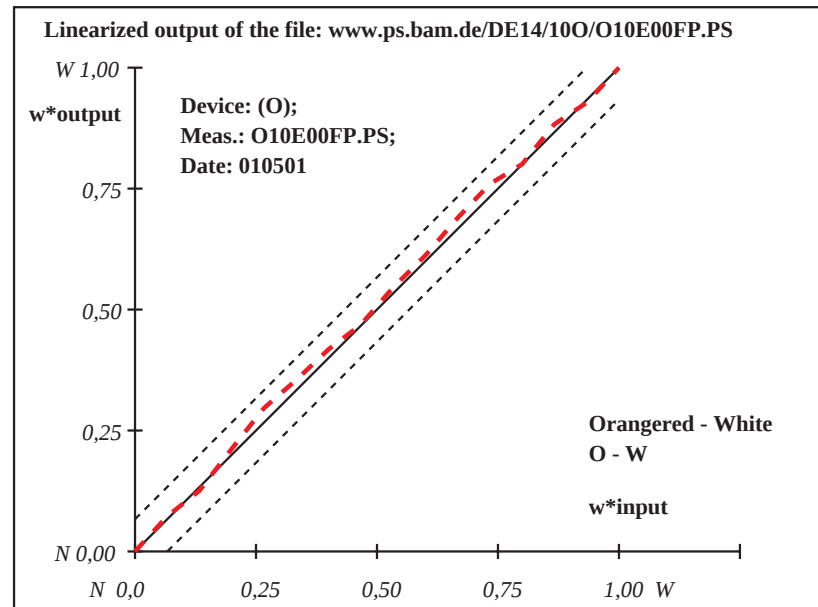

Device: (O); Meas.: O10E00FP.PS; Date: 010501

www.ps.bam.de/DE14/100/O10E00FP.PS


Output linearization of 16 colour steps according to ISO/IEC 15775; PS operator cmyn* setcmykcolor

i	LAB*ref	LAB*out, relative	LAB*out/c-ref	ΔE^*
1	45.66 -74.88 35.75	45.66 -74.88 35.75	0.0 0.0 0.0	0.01
2	49.02 -69.87 33.51	49.31 -69.43 33.32	0.3 0.44 -0.19	0.57
3	52.37 -64.86 31.28	52.13 -65.23 31.44	-0.24 -0.36 0.17	0.48
4	55.73 -59.85 29.04	53.3 -63.48 30.66	-2.42 -3.62 1.62	4.65
5	59.09 -54.85 26.81	55.44 -60.29 29.24	-3.64 -5.44 2.43	6.99
6	62.45 -49.84 24.57	57.96 -56.53 27.56	-4.48 -6.69 2.99	8.6
7	65.8 -44.83 22.33	60.37 -52.93 25.95	-5.42 -8.09 3.62	10.4
8	69.16 -39.82 20.1	62.39 -49.91 24.6	-6.76 -10.09 4.51	12.96
9	72.52 -34.81 17.86	65.73 -44.94 22.39	-6.78 -10.12 4.52	13.01
10	75.88 -29.8	70.19 -38.29 19.42	-5.68 -8.48 3.79	10.9
11	79.23 -24.79 13.39	71.71 -36.02 18.4	-7.52 -11.22 5.01	14.42
12	82.59 -19.78 11.15	78.02 -26.6 14.2	-4.56 -6.81 3.04	8.76
13	85.95 -14.78 8.92	81.23 -21.82 12.06	-4.71 -7.03 3.14	9.04
14	89.31 -9.77 6.68	85.28 -15.77 9.36	-4.02 -5.99 2.68	7.71
15	92.66 -4.76 4.45	91.13 -7.05 5.47	-1.53 -2.28 1.02	2.94
16	96.02 0.24 2.21	96.02 0.24 2.21	0.0 0.0 0.0	0.01
17	45.66 -74.88 35.75	45.66 -74.88 35.75	0.0 0.0 0.0	0.01
18	58.25 -56.1 27.37	54.91 -61.09 29.59	-3.33 -4.98 2.23	6.41
19	70.84 -37.32 18.98	64.06 -47.43 23.5	-6.77 -10.1 4.52	12.99
20	83.43 -18.53 10.59	78.82 -25.41 13.66	-4.6 -6.87 3.07	8.83
21	96.02 0.24 2.21	96.02 0.24 2.21	0.0 0.0 0.0	0.01
Mean colour reproduction index: $R^*_{ab,m} = 69$				

Start output S1
Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 96.02 - 45.66$
Regularity
 $g^* = 53.2$
Lightness gamut rel. to offset
 $f^* = 65.1$
 ΔL^* -gray variation
 $v^* = 0.0$
Mean CIELAB difference (16 steps)
 $\Delta E^*_{CIELAB} = 7.0$
Mean CIELAB difference (5 steps)
 $\Delta L^*_{CIELAB} = 5.6$

Device: (O); Meas.: O10E00NP.PS; Date: 010501

www.ps.bam.de/DE14/100/O10E00NP.PS

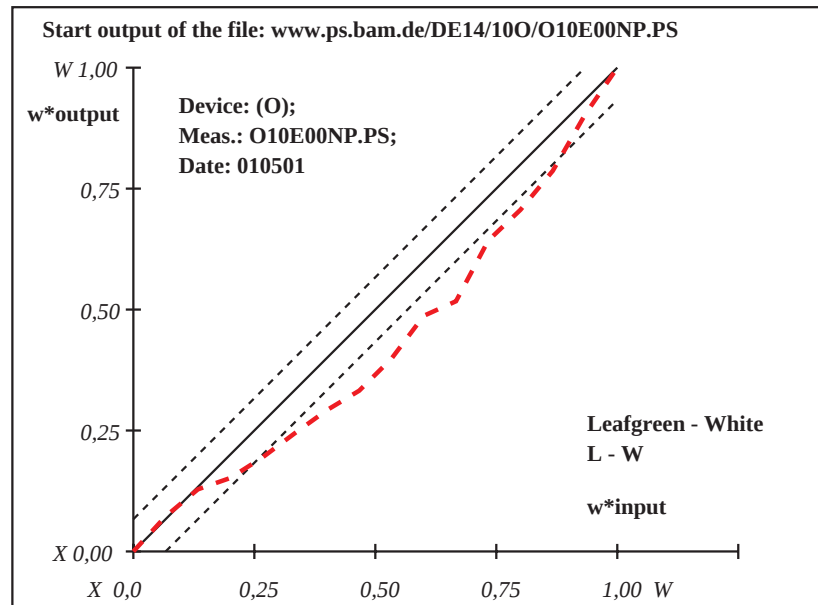

Device: (O); Meas.: O10E00NP.PS; Date: 010501


www.ps.bam.de/DE14/100/O10E00NP.PS

i	LAB*ref	LAB*out, relative	LAB*out/c-ref	ΔE^*
1	44.82 -74.86 36.34	44.82 -74.86 36.34	0.0 0.0 0.0	0.01
2	48.22 -69.88 34.05	47.93 -70.3 34.25	-0.28 -0.41 0.19	0.54
3	51.62 -64.89 31.77	50.54 -66.48 32.49	-1.07 -1.57 0.73	2.05
4	55.02 -59.91 29.48	54.39 -60.84 29.9	-0.62 -0.92 0.43	1.2
5	58.42 -54.93 27.19	58.34 -55.05 27.25	-0.07 -0.11 0.06	0.16
6	61.82 -49.94 24.9	62.36 -49.15 24.54	0.54 0.79 -0.35	1.02
7	65.22 -44.96 22.62	66.44 -43.17 21.8	1.22 1.79 -0.81	2.31
8	68.62 -39.98 20.33	68.08 -40.76 20.69	-0.53 -0.77 0.36	1.02
9	72.02 -34.99 18.04	74.23 -31.76 16.56	2.21 3.24 -1.47	4.19
10	75.42 -30.01 15.75	76.51 -28.41 15.02	1.09 1.6 -0.73	2.08
11	78.82 -25.03 13.47	79.3 -24.32 13.14	0.48 0.7 -0.31	0.91
12	82.22 -20.04 11.18	83.11 -18.74 10.58	0.89 1.3 -0.59	1.69
13	85.62 -15.06 8.89	86.91 -13.18 8.03	1.29 1.88 -0.85	2.44
14	89.02 -10.08 6.6	90.1 -8.5 5.88	1.08 1.58 -0.71	2.04
15	92.42 -5.09 4.32	92.75 -4.61 4.1	0.33 0.48 -0.21	0.63
16	95.82 -0.11 2.03	95.82 -0.11 2.03	0.0 0.0 0.0	0.01
17	44.82 -74.86 36.34	44.82 -74.86 36.34	0.0 0.0 0.0	0.01
18	57.57 -56.17 27.76	57.35 -56.5 27.91	-0.21 -0.31 0.15	0.42
19	70.32 -37.49 19.19	71.16 -36.26 18.62	0.84 1.23 -0.55	1.59
20	83.07 -18.8	84.06 -17.35 9.94	0.99 1.45 -0.66	1.88
21	95.82 -0.11 2.03	95.82 -0.11 2.03	0.0 0.0 0.0	0.01
Mean colour reproduction index: $R^*_{ab,m} = 94$				

Linearized output S2
Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 95.82 - 44.82$
Regularity
 $g^* = 85.2$
Lightness gamut rel. to offset
 $f^* = 65.9$
 ΔL^* -gray variation
 $v^* = 0.0$
Mean CIELAB difference (16 steps)
 $\Delta E^*_{CIELAB} = 1.4$
Mean CIELAB difference (5 steps)
 $\Delta L^*_{CIELAB} = 0.8$

Device: (O); Meas.: O10E00FP.PS; Date: 010501

www.ps.bam.de/DE14/100/O10E00FP.PS

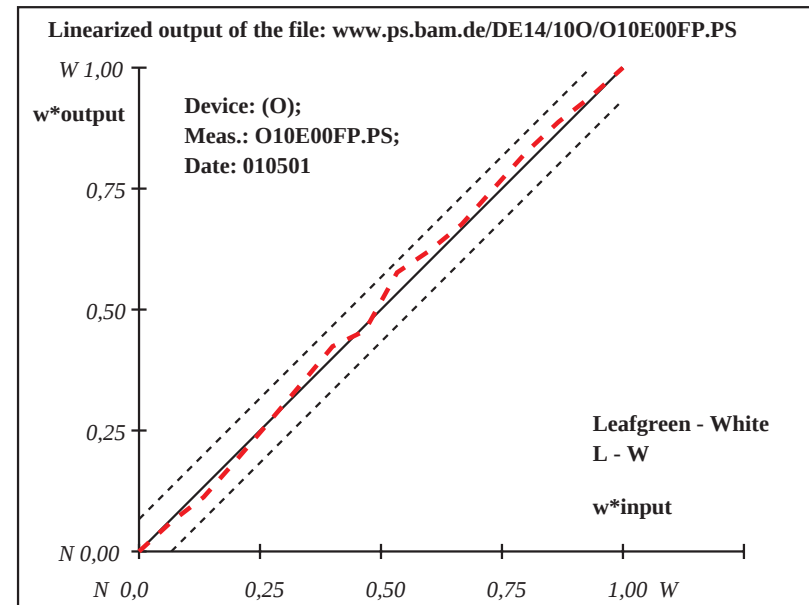

Device: (O); Meas.: O10E00FP.PS; Date: 010501

www.ps.bam.de/DE14/100/O10E00FP.PS


Output linearization of 16 colour steps according to ISO/IEC 15775; PS operator cmyn* setcmykcolor

i	LAB*ref	LAB*out, relative	LAB*out/c-ref	ΔE^*
1	17.9 19.39 -29.14	17.9 19.39 -29.14	0.0 0.0 0.0	0.01
2	23.1 18.1 -27.06	20.32 18.79 -28.17	-2.77 0.69 -1.1	3.08
3	28.31 16.8 -24.99	21.34 18.54 -27.77	-6.96 1.73 -2.77	7.7
4	33.51 15.51 -22.91	23.31 18.05 -26.98	-10.19 2.54 -4.06	11.27
5	38.71 14.22 -20.84	24.89 17.65 -26.35	-13.81 3.44 -5.5	15.27
6	43.92 12.92 -18.76	28.56 16.74 -24.89	-15.35 3.82 -6.12	16.97
7	49.12 11.63 -16.68	33.44 15.53 -22.94	-15.67 3.9 -6.24	17.32
8	54.32 10.34 -14.61	35.78 14.95 -22.01	-18.54 4.61 -7.39	20.49
9	59.53 9.04 -12.53	42.9 13.18 -19.17	-16.62 4.13 -6.62	18.37
10	64.73 7.75 -10.46	49.76 11.47 -16.43	-14.96 3.72 -5.96	16.54
11	69.93 6.46 -8.38	58.42 9.32 -12.98	-11.51 2.86 -4.59	12.73
12	75.14 5.16 -6.3	63.87 7.96 -10.8	-11.25 2.8 -4.48	12.45
13	80.34 3.87 -4.23	71.97 5.95 -7.57	-8.36 2.08 -3.33	9.25
14	85.54 2.58 -2.15	82.34 3.37 -3.43	-3.2 0.8 -1.27	3.54
15	90.75 1.28 -0.08	89.1 1.69 -0.73	-1.64 0.41 -0.65	1.82
16	95.95 0.0 1.99	95.95 0.0 1.99	0.0 0.0 0.0	0.01
17	17.9 19.39 -29.14	17.9 19.39 -29.14	0.0 0.0 0.0	0.01
18	37.41 14.54 -21.36	24.5 17.75 -26.51	-12.91 3.21 -5.14	14.27
19	56.92 9.69 -13.57	39.34 14.06 -20.59	-17.58 4.37 -7.01	19.43
20	76.44 4.84 -5.79	65.9 7.46 -9.99	-10.53 2.62 -4.2	11.65
21	95.95 0.0 1.99	95.95 0.0 1.99	0.0 0.0 0.0	0.01

Start output S1
Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 95.95 - 17.9$
Regularity
 $g^* = 21.9$
Lightness gamut rel. to offset
 $f^* = 100.8$
 ΔL^* -gray variation
 $v^* = 0.0$
Mean CIELAB difference (16 steps)
 $\Delta E^*_{CIELAB} = 10.4$
Mean CIELAB difference (5 steps)
 $\Delta L^*_{CIELAB} = 9.1$
Mean colour reproduction index: $R^*_{ab,m} = 54$

Device: (O); Meas.: O10E00NP.PS; Date: 010501

www.ps.bam.de/DE14/100/O10E00NP.PS

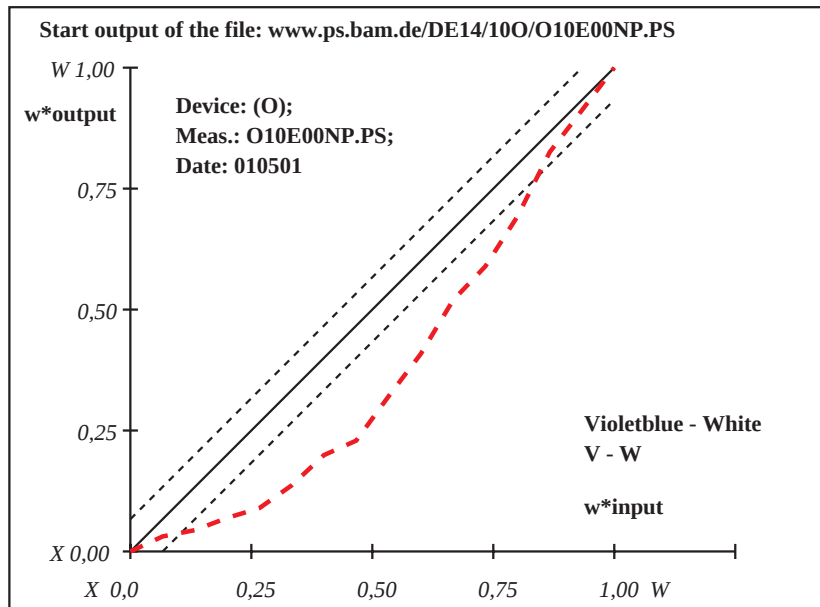

Device: (O); Meas.: O10E00NP.PS; Date: 010501


www.ps.bam.de/DE14/100/O10E00NP.PS

i	LAB*ref	LAB*out, relative	LAB*out/c-ref	ΔE^*
1	17.5 19.41 -26.64	17.5 19.41 -26.64	0.0 0.0 0.0	0.01
2	22.71 18.1 -24.73	24.16 17.74 -24.2	1.45 -0.35 0.53	1.58
3	27.93 16.79 -22.82	29.27 16.45 -22.33	1.34 -0.33 0.49	1.47
4	33.14 15.48 -20.91	33.38 15.42 -20.82	0.25 -0.05 0.09	0.27
5	38.35 14.17 -19.0	42.15 13.21 -17.61	3.8 -0.95 1.39	4.16
6	43.56 12.86 -17.09	45.81 12.29 -16.27	2.25 -0.56 0.82	2.46
7	48.78 11.55 -15.18	50.1 11.21 -14.7	1.32 -0.32 0.48	1.45
8	53.99 10.24 -13.27	55.23 9.92 -12.82	1.24 -0.3 0.45	1.36
9	59.2 8.92 -11.37	60.05 8.71 -11.05	0.85 -0.2 0.31	0.93
10	64.41 7.61 -9.46	64.99 7.47 -9.25	0.58 -0.13 0.21	0.63
11	69.63 6.3 -7.55	70.54 6.07 -7.21	0.91 -0.22 0.33	1.0
12	74.84 4.99 -5.64	76.02 4.7 -5.21	1.18 -0.29 0.43	1.29
13	80.05 3.68 -3.73	80.81 3.49 -3.45	0.76 -0.18 0.28	0.83
14	85.26 2.37 -1.82	86.84 1.98 -1.24	1.57 -0.39 0.58	1.72
15	90.48 1.06 0.08	90.64 1.02 0.14	0.16 -0.03 0.06	0.18
16	95.69 -0.24 1.99	95.69 -0.24 1.99	0.0 0.0 0.0	0.01
17	17.5 19.41 -26.64	17.5 19.41 -26.64	0.0 0.0 0.0	0.01
18	37.05 14.5 -19.48	39.96 13.76 -18.41	2.91 -0.72 1.07	3.19
19	56.6 9.58 -12.32	57.64 9.32 -11.94	1.05 -0.25 0.38	1.14
20	76.14 4.67 -5.16	77.22 4.4 -4.77	1.07 -0.26 0.39	1.17
21	95.69 -0.24 1.99	95.69 -0.24 1.99	0.0 0.0 0.0	0.01

Linearized output S2
Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 95.69 - 17.5$
Regularity
 $g^* = 78.7$
Lightness gamut rel. to offset
 $f^* = 101.0$
 ΔL^* -gray variation
 $v^* = 0.0$
Mean CIELAB difference (16 steps)
 $\Delta E^*_{CIELAB} = 1.2$
Mean CIELAB difference (5 steps)
 $\Delta L^*_{CIELAB} = 1.1$
Mean colour reproduction index: $R^*_{ab,m} = 95$

Device: (O); Meas.: O10E00FP.PS; Date: 010501

www.ps.bam.de/DE14/100/O10E00FP.PS

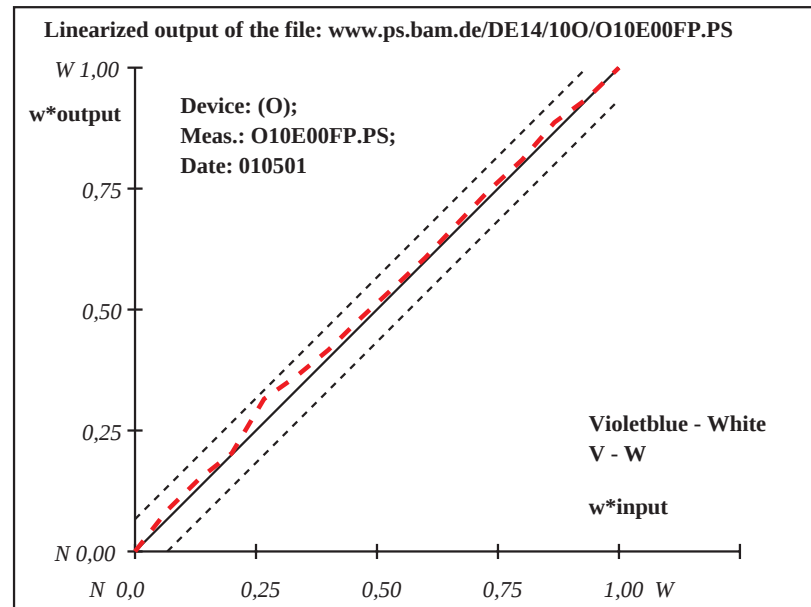

Device: (O); Meas.: O10E00FP.PS; Date: 010501


www.ps.bam.de/DE14/100/O10E00FP.PS

Output linearization of 16 colour steps according to ISO/IEC 15775; PS operator cmyn* setcmykcolor

i	LAB*ref			LAB*out, relative			LAB*out/c-ref			ΔE^*	Start output S1 Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G relative CIELAB data used for "out" $\Delta L^* = 95.82 - 21.4$ Regularity $g^* = 12.0$ Lightness gamut rel. to offset $f^* = 96.1$ ΔL^* -gray variation $v^* = 0.0$ Mean CIELAB difference (16 steps) $\Delta E^{*CIELAB} = 12.2$ Mean CIELAB difference (5 steps) $\Delta L^{*CIELAB} = 10.2$ Mean colour reproduction index: $R^*_{ab,m} = 46$
1	21.4	-6.05	9.08	21.4	-6.05	9.08	0.0	0.0	0.0	0.01	
2	26.36	-5.64	8.6	21.99	-6.0	9.02	-4.36	-0.35	0.42	4.41	
3	31.32	-5.24	8.13	22.41	-5.97	8.98	-8.9	-0.72	0.86	8.98	
4	36.28	-4.83	7.65	22.92	-5.93	8.93	-13.35	-1.08	1.28	13.47	
5	41.25	-4.43	7.18	25.81	-5.69	8.66	-15.43	-1.25	1.48	15.56	
6	46.21	-4.02	6.7	27.83	-5.52	8.46	-18.37	-1.49	1.76	18.52	
7	51.17	-3.61	6.22	29.37	-5.4	8.32	-21.79	-1.77	2.09	21.97	
8	56.13	-3.21	5.75	32.26	-5.16	8.04	-23.86	-1.94	2.29	24.06	
9	61.09	-2.8	5.27	38.16	-4.68	7.47	-22.92	-1.87	2.2	23.11	
10	66.05	-2.4	4.8	46.0	-4.04	6.72	-20.04	-1.63	1.92	20.21	
11	71.01	-1.99	4.32	55.26	-3.28	5.83	-15.74	-1.28	1.51	15.88	
12	75.97	-1.58	3.84	63.1	-2.64	5.08	-12.87	-1.04	1.24	12.98	
13	80.94	-1.18	3.37	70.92	-2.0	4.33	-10.01	-0.81	0.96	10.1	
14	85.9	-0.77	2.89	81.78	-1.11	3.29	-4.11	-0.33	0.4	4.15	
15	90.86	-0.37	2.42	88.38	-0.57	2.65	-2.47	-0.19	0.24	2.5	
16	95.82	0.03	1.94	95.82	0.03	1.94	0.0	0.0	0.0	0.01	
17	21.4	-6.05	9.08	21.4	-6.05	9.08	0.0	0.0	0.0	0.01	
18	40.0	-4.53	7.3	25.08	-5.75	8.73	-14.91	-1.21	1.43	15.04	
19	58.61	-3.01	5.51	35.21	-4.92	7.76	-23.39	-1.91	2.25	23.59	
20	77.21	-1.48	3.73	65.05	-2.48	4.89	-12.15	-0.99	1.17	12.26	
21	95.82	0.03	1.94	95.82	0.03	1.94	0.0	0.0	0.0	0.01	

Device: (O); Meas.: O10E00NP.PS; Date: 010501

www.ps.bam.de/DE14/100/O10E00NP.PS

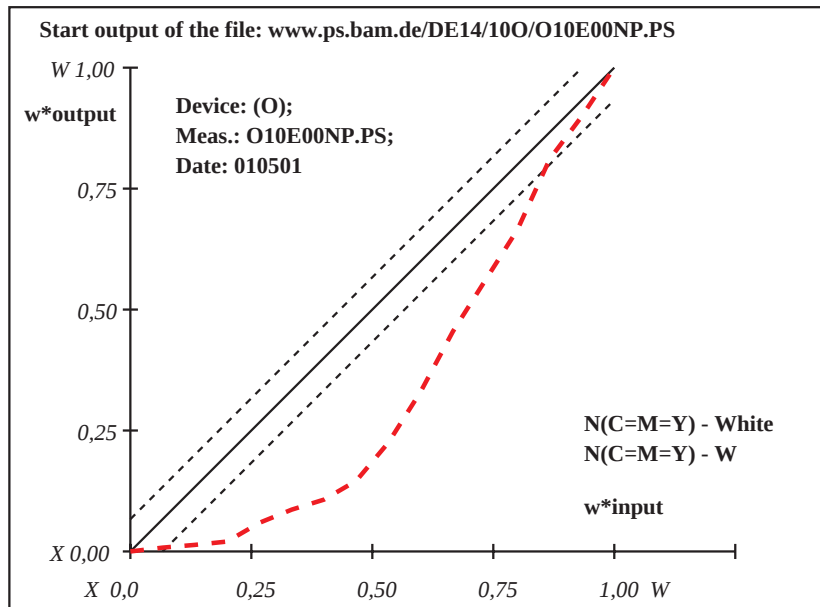


Device: (O); Meas.: O10E00NP.PS; Date: 010501

www.ps.bam.de/DE14/100/O10E00NP.PS

i	LAB*ref			LAB*out, relative			LAB*out/c-ref			ΔE^*	Linearized output S2 Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G relative CIELAB data used for "out" $\Delta L^* = 95.6 - 23.1$ Regularity $g^* = 91.6$ Lightness gamut rel. to offset $f^* = 93.7$ ΔL^* -gray variation $v^* = 0.0$ Mean CIELAB difference (16 steps) $\Delta E^{*CIELAB} = 0.8$ Mean CIELAB difference (5 steps) $\Delta L^{*CIELAB} = 0.3$ Mean colour reproduction index: $R^*_{ab,m} = 97$
1	23.1	-7.21	8.6	23.1	-7.21	8.6	0.0	0.0	0.0	0.01	
2	27.93	-6.76	8.17	26.19	-6.92	8.32	-1.73	-0.15	0.16	1.76	
3	32.77	-6.3	7.73	33.42	-6.24	7.68	0.65	0.06	-0.05	0.66	
4	37.6	-5.85	7.3	37.72	-5.84	7.29	0.12	0.01	0.0	0.12	
5	42.43	-5.4	6.87	43.14	-5.33	6.81	0.7	0.07	-0.05	0.71	
6	47.27	-4.94	6.44	48.24	-4.85	6.35	0.98	0.09	-0.08	0.99	
7	52.1	-4.49	6.0	53.38	-4.37	5.89	1.28	0.12	-0.1	1.29	
8	56.93	-4.04	5.57	57.67	-3.97	5.51	0.74	0.07	-0.06	0.74	
9	61.77	-3.58	5.14	62.58	-3.51	5.07	0.81	0.08	-0.06	0.82	
10	66.6	-3.13	4.71	66.32	-3.16	4.73	-0.27	-0.02	0.03	0.29	
11	71.43	-2.68	4.27	72.81	-2.55	4.15	1.38	0.13	-0.11	1.39	
12	76.27	-2.22	3.84	75.8	-2.27	3.88	-0.45	-0.03	0.04	0.47	
13	81.1	-1.77	3.41	81.52	-1.73	3.37	0.42	0.04	-0.03	0.43	
14	85.93	-1.32	2.98	88.19	-1.11	2.77	2.26	0.21	-0.19	2.27	
15	90.77	-0.86	2.54	91.42	-0.8	2.48	0.65	0.06	-0.05	0.65	
16	95.6	-0.41	2.11	95.6	-0.41	2.11	0.0	0.0	0.0	0.01	
17	23.1	-7.21	8.6	23.1	-7.21	8.6	0.0	0.0	0.0	0.01	
18	41.23	-5.51	6.98	41.78	-5.46	6.93	0.56	0.05	-0.04	0.56	
19	59.35	-3.81	5.36	60.13	-3.74	5.29	0.78	0.07	-0.06	0.78	
20	77.48	-2.11	3.73	77.23	-2.13	3.75	-0.23	-0.01	0.02	0.24	
21	95.6	-0.41	2.11	95.6	-0.41	2.11	0.0	0.0	0.0	0.01	

Device: (O); Meas.: O10E00FP.PS; Date: 010501

www.ps.bam.de/DE14/100/O10E00FP.PS

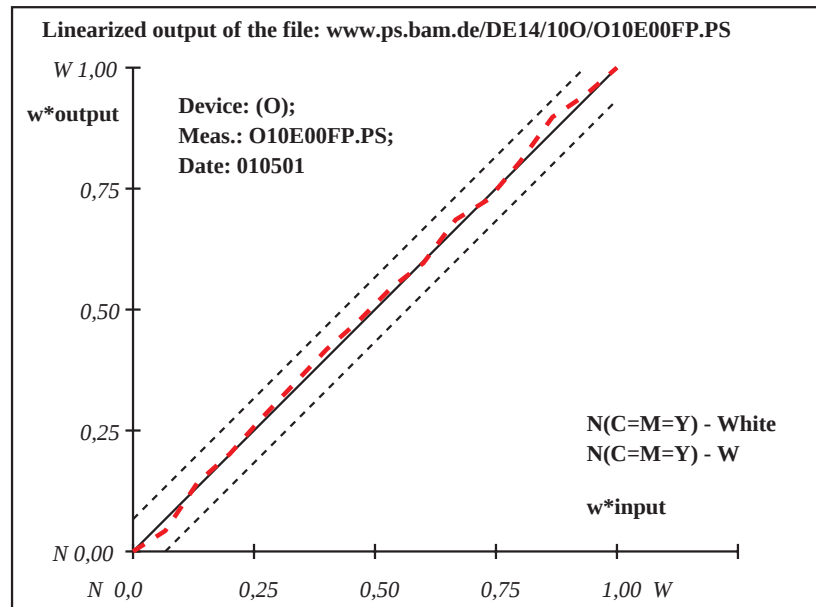

Device: (O); Meas.: O10E00FP.PS; Date: 010501

www.ps.bam.de/DE14/100/O10E00FP.PS

Output linearization of 16 colour steps according to ISO/IEC 15775; PS operator cmyn* setcmykcolor