


i	LAB*ref	LAB*out, relative	LAB*out/c-ref	ΔE^*	Start output S1
1	50.04 -24.3 -45.79	50.04 -24.3 -45.79	0.0 0.0 0.0	0.01	Specification according to
2	52.85 -22.8 -43.0	50.87 -23.86 -44.96	-1.97 -1.04 -1.95	2.98	ISO/IEC 15775 Annex G
3	55.66 -21.31 -40.21	51.98 -23.27 -43.86	-3.67 -1.95 -3.64	5.54	and DIN 33866-1 Annex G
4	58.47 -19.81 -37.42	53.16 -22.64 -42.69	-5.3 -2.82 -5.26	8.0	relative CIELAB data used for "out"
5	61.29 -18.32 -34.63	55.29 -21.51 -40.58	-5.99 -3.18 -5.94	9.03	$\Delta L^* = 92.21 - 50.04$
6	64.1 -16.82 -31.84	58.96 -19.56 -36.94	-5.13 -2.72 -5.09	7.74	Regularity
7	66.91 -15.33 -29.05	62.87 -17.47 -33.05	-4.03 -2.14 -4.0	6.08	$g^* = 30.8$
8	69.72 -13.83 -26.26	65.4 -16.13 -30.54	-4.3 -2.29 -4.27	6.5	
9	72.53 -12.34 -23.46	67.47 -15.03 -28.49	-5.05 -2.68 -5.01	7.62	Lightness gamut rel. to offset
10	75.34 -10.84 -20.67	72.43 -12.39 -23.57	-2.91 -1.54 -2.89	4.39	$f^* = 54.5$
11	78.15 -9.35 -17.88	76.45 -10.25 -19.58	-1.7 -0.9 -1.68	2.57	
12	80.96 -7.85 -15.09	80.84 -7.92 -15.22	-0.12 -0.06 -0.12	0.19	ΔL^* -gray variation
13	83.78 -6.36 -12.3	84.52 -5.96 -11.56	0.75 0.4 0.74	1.13	$v^* = 0.0$
14	86.59 -4.86 -9.51	88.11 -4.05 -8.0	1.52 0.81 1.51	2.29	
15	89.4 -3.37 -6.72	90.52 -2.77 -5.61	1.12 0.6 1.11	1.69	Mean CIELAB difference (16 steps)
16	92.21 -1.87 -3.93	92.21 -1.87 -3.93	0.0 0.0 0.0	0.01	$\Delta E^*_{\text{CIELAB}} = 4.1$
17	50.04 -24.3 -45.79	50.04 -24.3 -45.79	0.0 0.0 0.0	0.01	
18	60.58 -18.69 -35.33	54.75 -21.79 -41.11	-5.82 -3.09 -5.77	8.78	
19	71.13 -13.08 -24.86	66.44 -15.58 -29.51	-4.68 -2.48 -4.64	7.06	Mean CIELAB difference (5 steps)
20	81.67 -7.48 -14.39	81.76 -7.43 -14.3	0.09 0.05 0.09	0.14	$\Delta L^*_{\text{CIELAB}} = 3.2$
21	92.21 -1.87 -3.93	92.21 -1.87 -3.93	0.0 0.0 0.0	0.01	
Mean colour reproduction index: $R^*_{\text{ab,m}} = 82$					

Device: (O); Meas.: O21E00NA.PS; Date: 180701

www.ps.bam.de/DE14/100/O21E00NA.PS

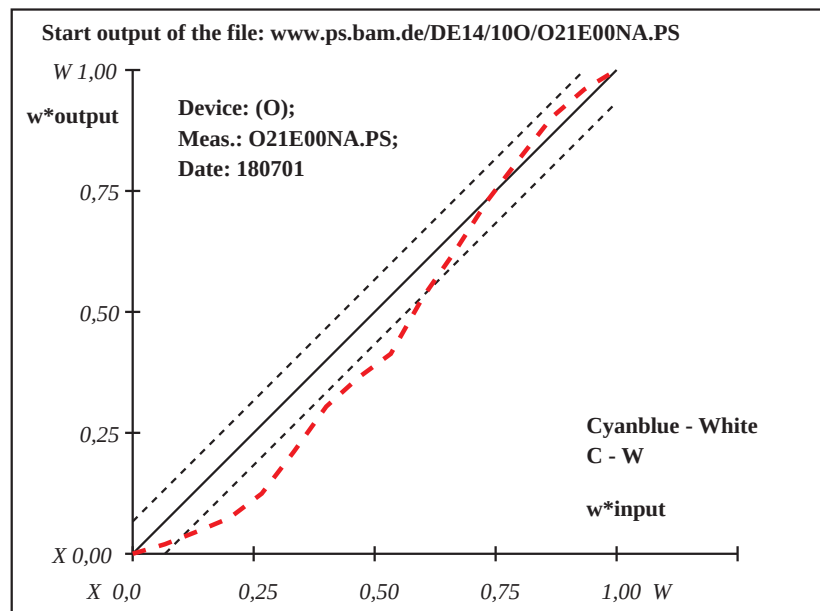


Device: (O); Meas.: O21E00NA.PS; Date: 180701

www.ps.bam.de/DE14/100/O21E00NA.PS

i	LAB*ref	LAB*out, relative	LAB*out/c-ref	ΔE^*	Linearized output S2
1	50.55 -26.65 -45.17	50.55 -26.65 -45.17	0.0 0.0 0.0	0.01	Specification according to
2	53.3 -25.1 -42.36	53.91 -24.76 -41.74	0.61 0.34 0.62	0.93	ISO/IEC 15775 Annex G
3	56.06 -23.55 -39.56	55.31 -23.97 -40.31	-0.73 -0.41 -0.75	1.14	and DIN 33866-1 Annex G
4	58.81 -22.0 -36.75	56.95 -23.05 -38.64	-1.85 -1.03 -1.88	2.85	relative CIELAB data used for "out"
5	61.56 -20.45 -33.94	59.01 -21.89 -36.54	-2.54 -1.43 -2.59	3.92	$\Delta L^* = 91.84 - 50.55$
6	64.31 -18.9 -31.13	62.04 -20.19 -33.46	-2.27 -1.27 -2.31	3.5	Regularity
7	67.07 -17.35 -28.33	67.44 -17.14 -27.94	0.37 0.21 0.38	0.57	$g^* = 69.2$
8	69.82 -15.8 -25.52	68.91 -16.32 -26.45	-0.9 -0.5 -0.92	1.4	
9	72.57 -14.26 -22.71	71.03 -15.12 -24.29	-1.53 -0.86 -1.57	2.37	Lightness gamut rel. to offset
10	75.32 -12.71 -19.9	74.6 -13.12 -20.65	-0.72 -0.4 -0.73	1.12	$f^* = 53.3$
11	78.08 -11.16 -17.1	77.51 -11.47 -17.67	-0.55 -0.31 -0.56	0.87	
12	80.83 -9.61 -14.29	80.5 -9.79 -14.62	-0.32 -0.17 -0.32	0.5	ΔL^* -gray variation
13	83.58 -8.06 -11.48	83.21 -8.27 -11.86	-0.36 -0.2 -0.37	0.57	$v^* = 0.0$
14	86.33 -6.51 -8.67	85.94 -6.73 -9.08	-0.39 -0.21 -0.39	0.61	
15	89.09 -4.96 -5.87	89.05 -4.98 -5.91	-0.03 -0.01 -0.03	0.06	Mean CIELAB difference (16 steps)
16	91.84 -3.41 -3.06	91.84 -3.41 -3.06	0.0 0.0 0.0	0.01	$\Delta E^*_{\text{CIELAB}} = 1.3$
17	50.55 -26.65 -45.17	50.55 -26.65 -45.17	0.0 0.0 0.0	0.01	
18	60.87 -20.84 -34.64	58.49 -22.18 -37.07	-2.37 -1.33 -2.42	3.65	
19	71.2 -15.03 -24.12	69.97 -15.72 -25.37	-1.22 -0.68 -1.24	1.88	Mean CIELAB difference (5 steps)
20	81.52 -9.22 -13.59	81.18 -9.41 -13.93	-0.33 -0.18 -0.33	0.52	$\Delta L^*_{\text{CIELAB}} = 1.2$
21	91.84 -3.41 -3.06	91.84 -3.41 -3.06	0.0 0.0 0.0	0.01	
Mean colour reproduction index: $R^*_{\text{ab,m}} = 94$					

Device: (O); Meas.: O21E00FA.PS; Date: 180701

www.ps.bam.de/DE14/100/O21E00FA.PS

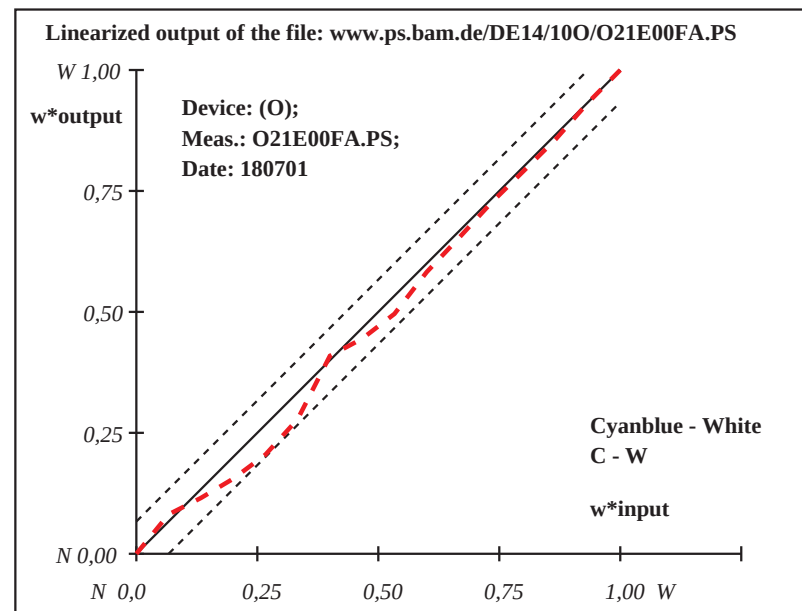


Device: (O); Meas.: O21E00FA.PS; Date: 180701

www.ps.bam.de/DE14/100/O21E00FA.PS

i	LAB*ref			LAB*out, relative			LAB*out/c-ref			ΔE^*	Start output S1	
1	44.27	64.82	-2.15	44.27	64.82	-2.15	0.0	0.0	0.0	0.01	Specification according to	
2	47.46	60.4	-2.3	45.09	63.69	-2.19	-2.37	3.29	0.11	4.06	ISO/IEC 15775 Annex G	
3	50.65	55.99	-2.45	46.08	62.32	-2.24	-4.57	6.33	0.22	7.82	and DIN 33866-1 Annex G	
4	53.84	51.57	-2.6	48.29	59.26	-2.34	-5.55	7.69	0.26	9.49	relative CIELAB data used for "out"	
5	57.04	47.15	-2.76	50.38	56.37	-2.44	-6.65	9.22	0.32	11.37	$\Delta L^* = 92.14 - 44.27$	
6	60.23	42.73	-2.91	53.28	52.35	-2.58	-6.94	9.62	0.33	11.87	Regularity	
7	63.42	38.32	-3.06	57.02	47.18	-2.75	-6.39	8.86	0.3	10.93	$g^* = 31.4$	
8	66.61	33.9	-3.21	61.03	41.62	-2.94	-5.57	7.72	0.26	9.53	Lightness gamut rel. to offset	
9	69.8	29.48	-3.36	65.37	35.61	-3.15	-4.42	6.13	0.21	7.56	$f^* = 61.8$	
10	72.99	25.06	-3.51	69.55	29.83	-3.35	-3.43	4.77	0.16	5.88	ΔL^* -gray variation	
11	76.18	20.65	-3.66	75.99	20.91	-3.65	-0.18	0.26	0.01	0.32	$v^* = 0.0$	
12	79.37	16.23	-3.81	79.65	15.85	-3.83	0.28	-0.37	0.0	0.47	Mean CIELAB difference (16 steps)	
13	82.57	11.81	-3.97	85.03	8.4	-4.08	2.46	-3.4	-0.11	4.21	$\Delta E^*_{CIELAB} = 5.8$	
14	85.76	7.39	-4.12	89.03	2.87	-4.27	3.27	-4.51	-0.14	5.58	Mean CIELAB difference (5 steps)	
15	88.95	2.98	-4.27	90.74	0.49	-4.35	1.79	-2.47	-0.08	3.06	$\Delta L^*_{CIELAB} = 4.2$	
16	92.14	-1.43	-4.42	92.14	-1.43	-4.42	0.0	0.0	0.0	0.01	Mean colour reproduction index: $R^*_{ab,m} = 75$	
17	44.27	64.82	-2.15	44.27	64.82	-2.15	0.0	0.0	0.0	0.01		
18	56.24	48.25	-2.72	49.86	57.09	-2.41	-6.37	8.83	0.3	10.9		
19	68.21	31.69	-3.29	63.2	38.62	-3.05	-4.99	6.93	0.24	8.55		
20	80.17	15.13	-3.85	81.0	13.99	-3.89	0.82	-1.13	-0.03	1.41		
21	92.14	-1.43	-4.42	92.14	-1.43	-4.42	0.0	0.0	0.0	0.01		

Device: (O); Meas.: O21E00NA.PS; Date: 180701

www.ps.bam.de/DE14/100/O21E00NA.PS

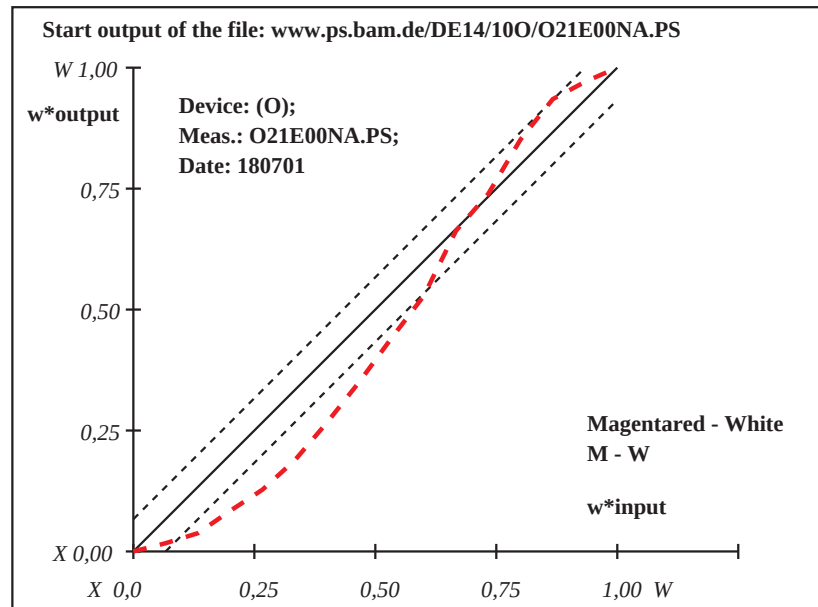


Device: (O); Meas.: O21E00NA.PS; Date: 180701

www.ps.bam.de/DE14/100/O21E00NA.PS

i	LAB*ref			LAB*out, relative			LAB*out/c-ref			ΔE^*	Linearized output S2	
1	43.62	65.68	-3.15	43.62	65.68	-3.15	0.0	0.0	0.0	0.01	Specification according to	
2	46.87	61.09	-3.18	46.96	60.96	-3.19	0.1	-0.13	0.0	0.17	ISO/IEC 15775 Annex G	
3	50.11	56.51	-3.22	49.56	57.29	-3.21	-0.55	0.78	0.01	0.96	and DIN 33866-1 Annex G	
4	53.36	51.92	-3.25	52.97	52.46	-3.25	-0.37	0.54	0.0	0.66	relative CIELAB data used for "out"	
5	56.6	47.34	-3.29	57.33	46.31	-3.29	0.73	-1.02	0.0	1.26	$\Delta L^* = 92.3 - 43.62$	
6	59.85	42.75	-3.32	59.64	43.05	-3.32	-0.2	0.3	0.0	0.36	Regularity	
7	63.09	38.16	-3.35	63.06	38.22	-3.35	-0.03	0.05	0.0	0.06	$g^* = 80.8$	
8	66.34	33.58	-3.39	65.15	35.26	-3.38	-1.18	1.68	0.01	2.06	Lightness gamut rel. to offset	
9	69.58	28.99	-3.42	68.64	30.33	-3.41	-0.94	1.34	0.01	1.64	$f^* = 62.9$	
10	72.83	24.41	-3.46	72.26	25.21	-3.45	-0.56	0.8	0.01	0.98	ΔL^* -gray variation	
11	76.07	19.82	-3.49	75.14	21.14	-3.48	-0.93	1.32	0.01	1.62	$v^* = 0.0$	
12	79.32	15.23	-3.52	79.32	15.24	-3.52	0.0	0.0	0.0	0.01	Mean CIELAB difference (16 steps)	
13	82.56	10.65	-3.56	82.32	10.99	-3.56	-0.23	0.34	0.0	0.42	$\Delta E^*_{CIELAB} = 0.7$	
14	85.81	6.06	-3.59	85.63	6.31	-3.59	-0.16	0.25	0.0	0.3	Mean CIELAB difference (5 steps)	
15	89.05	1.48	-3.63	88.55	2.18	-3.62	-0.49	0.71	0.01	0.87	$\Delta L^*_{CIELAB} = 0.6$	
16	92.3	-3.1	-3.66	92.3	-3.1	-3.66	0.0	0.0	0.0	0.01	Mean colour reproduction index: $R^*_{ab,m} = 97$	
17	43.62	65.68	-3.15	43.62	65.68	-3.15	0.0	0.0	0.0	0.01		
18	55.79	48.48	-3.28	56.24	47.85	-3.28	0.45	-0.62	0.0	0.78		
19	67.96	31.29	-3.41	66.89	32.8	-3.39	-1.06	1.51	0.01	1.85		
20	80.13	14.09	-3.53	80.07	14.18	-3.53	-0.05	0.09	0.0	0.11		
21	92.3	-3.1	-3.66	92.3	-3.1	-3.66	0.0	0.0	0.0	0.01		

Device: (O); Meas.: O21E00FA.PS; Date: 180701

www.ps.bam.de/DE14/100/O21E00FA.PS

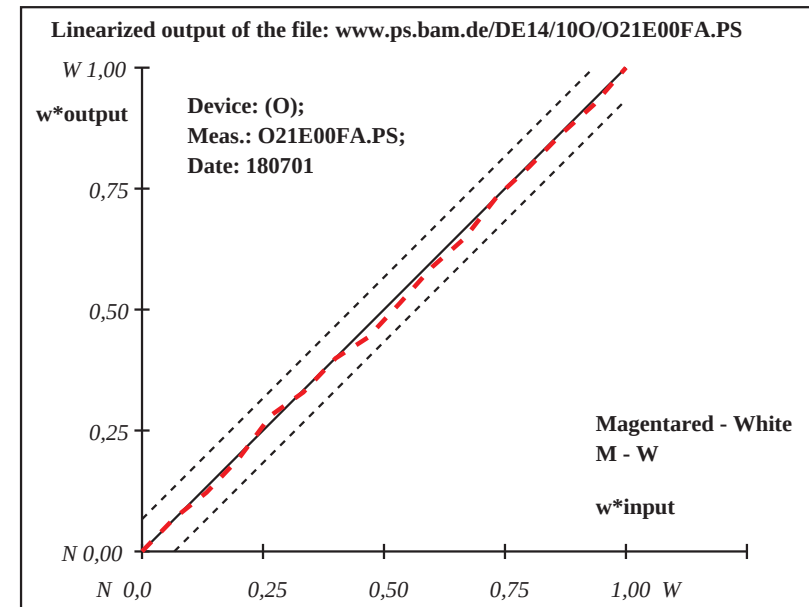

Device: (O); Meas.: O21E00FA.PS; Date: 180701

www.ps.bam.de/DE14/100/O21E00FA.PS


Output linearization of 16 colour steps according to ISO/IEC 15775; PS operator cmyn* setcmykcolor

i	LAB*ref	LAB*out, relative	LAB*out/c-ref	ΔE^*
1	87.0 -19.74 92.84	87.0 -19.74 92.84	0.0 0.0 0.0	0.01
2	87.37 -18.56 86.38	87.22 -19.03 88.96	-0.14 -0.46 2.59	2.63
3	87.75 -17.38 79.91	87.36 -18.61 86.67	-0.38 -1.22 6.75	6.88
4	88.12 -16.21 73.45	87.64 -17.74 81.88	-0.48 -1.53 8.43	8.58
5	88.5 -15.03 66.99	88.02 -16.52 75.2	-0.47 -1.49 8.21	8.36
6	88.87 -13.85 60.53	88.44 -15.22 68.05	-0.43 -1.36 7.52	7.66
7	89.25 -12.67 54.06	89.0 -13.46 58.39	-0.24 -0.78 4.33	4.41
8	89.62 -11.49 47.6	89.46 -12.01 50.43	-0.15 -0.51 2.83	2.88
9	90.0 -10.32 41.14	89.71 -11.21 46.07	-0.28 -0.89 4.93	5.02
10	90.37 -9.14 34.68	90.31 -9.33 35.72	-0.05 -0.18 1.04	1.06
11	90.75 -7.96 28.21	90.82 -7.72 26.89	0.08 0.24 -1.31	1.35
12	91.12 -6.78 21.75	91.4 -5.89 16.88	0.28 0.89 -4.86	4.96
13	91.5 -5.6 15.29	91.78 -4.71 10.39	0.28 0.89 -4.89	4.99
14	91.87 -4.43 8.83	92.01 -3.99 6.45	0.14 0.43 -2.37	2.42
15	92.25 -3.25 2.36	92.43 -2.68 -0.74	0.18 0.57 -3.11	3.17
16	92.62 -2.07 -4.09	92.62 -2.07 -4.09	0.0 0.0 0.0	0.01
17	87.0 -19.74 92.84	87.0 -19.74 92.84	0.0 0.0 0.0	0.01
18	88.41 -15.32 68.6	87.93 -16.83 76.87	-0.47 -1.5 8.26	8.41
19	89.81 -10.91 44.37	89.59 -11.61 48.25	-0.21 -0.7 3.88	3.95
20	91.22 -6.49 20.14	91.5 -5.6 15.26	0.28 0.89 -4.87	4.97
21	92.62 -2.07 -4.09	92.62 -2.07 -4.09	0.0 0.0 0.0	0.01
Mean colour reproduction index: $R^*_{ab,m} = 82$				

Start output S1
Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 92.62 - 87.0$
Regularity
 $g^* = 48.4$
Lightness gamut rel. to offset
 $f^* = 7.3$
 ΔL^* -gray variation
 $v^* = 0.0$
Mean CIELAB difference (16 steps)
 $\Delta E^*_{CIELAB} = 4.0$
Mean CIELAB difference (5 steps)
 $\Delta L^*_{CIELAB} = 3.5$

Device: (O); Meas.: O21E00NA.PS; Date: 180701

www.ps.bam.de/DE14/100/O21E00NA.PS

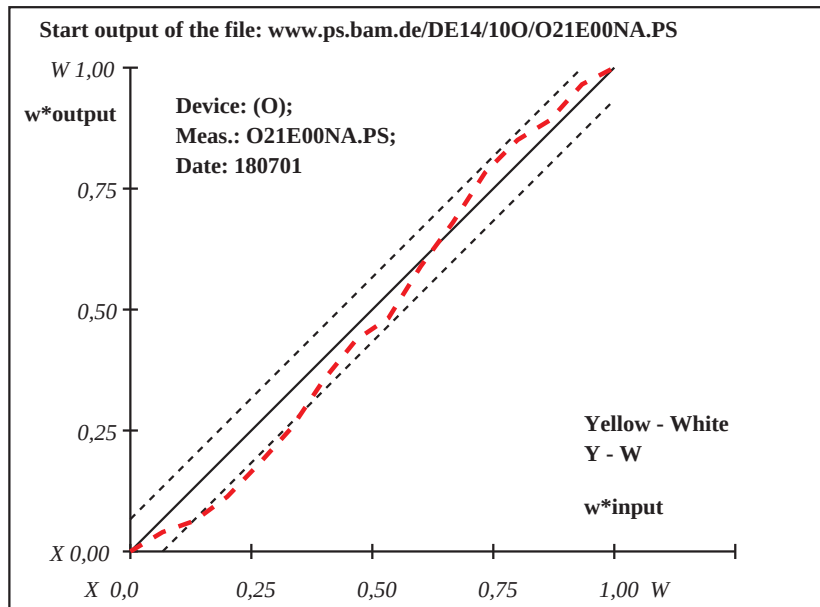

Device: (O); Meas.: O21E00NA.PS; Date: 180701


www.ps.bam.de/DE14/100/O21E00NA.PS

i	LAB*ref	LAB*out, relative	LAB*out/c-ref	ΔE^*
1	87.18 -20.75 93.91	87.18 -20.75 93.91	0.0 0.0 0.0	0.01
2	87.53 -19.56 87.39	87.46 -19.8 88.73	-0.06 -0.23 1.34	1.36
3	87.88 -18.36 80.87	87.75 -18.82 83.35	-0.12 -0.44 2.48	2.53
4	88.23 -17.17 74.35	88.01 -17.94 78.56	-0.22 -0.76 4.21	4.28
5	88.58 -15.97 67.83	88.42 -16.52 70.84	-0.15 -0.54 3.01	3.07
6	88.93 -14.78 61.31	88.78 -15.28 64.08	-0.14 -0.5 2.77	2.82
7	89.28 -13.58 54.79	89.21 -13.84 56.22	-0.07 -0.25 1.43	1.46
8	89.63 -12.39 48.27	89.61 -12.47 48.73	-0.01 -0.07 0.46	0.47
9	89.99 -11.19 41.75	89.94 -11.34 42.55	-0.03 -0.14 0.8	0.81
10	90.34 -10.0 35.23	90.25 -10.29 36.83	-0.08 -0.28 1.6	1.63
11	90.69 -8.8 28.71	90.65 -8.92 29.34	-0.02 -0.11 0.63	0.64
12	91.04 -7.61 22.19	90.94 -7.95 24.03	-0.09 -0.33 1.84	1.87
13	91.39 -6.41 15.67	91.28 -6.79 17.74	-0.1 -0.37 2.07	2.11
14	91.74 -5.22 9.15	91.73 -5.23 9.23	0.0 0.0 0.08	0.08
15	92.09 -4.02 2.63	92.07 -4.1 3.03	-0.01 -0.06 0.4	0.41
16	92.44 -2.83 -3.88	92.44 -2.83 -3.88	0.0 0.0 0.0	0.01
17	87.18 -20.75 93.91	87.18 -20.75 93.91	0.0 0.0 0.0	0.01
18	88.5 -16.27 69.46	88.32 -16.88 72.77	-0.17 -0.6 3.31	3.37
19	89.81 -11.79 45.01	89.78 -11.91 45.64	-0.02 -0.11 0.63	0.64
20	91.13 -7.31 20.56	91.02 -7.66 22.46	-0.09 -0.34 1.9	1.93
21	92.44 -2.83 -3.88	92.44 -2.83 -3.88	0.0 0.0 0.0	0.01
Mean colour reproduction index: $R^*_{ab,m} = 94$				

Linearized output S2
Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 92.44 - 87.18$
Regularity
 $g^* = 77.9$
Lightness gamut rel. to offset
 $f^* = 6.8$
 ΔL^* -gray variation
 $v^* = 0.0$
Mean CIELAB difference (16 steps)
 $\Delta E^*_{CIELAB} = 1.5$
Mean CIELAB difference (5 steps)
 $\Delta L^*_{CIELAB} = 1.2$

Device: (O); Meas.: O21E00FA.PS; Date: 180701

www.ps.bam.de/DE14/100/O21E00FA.PS

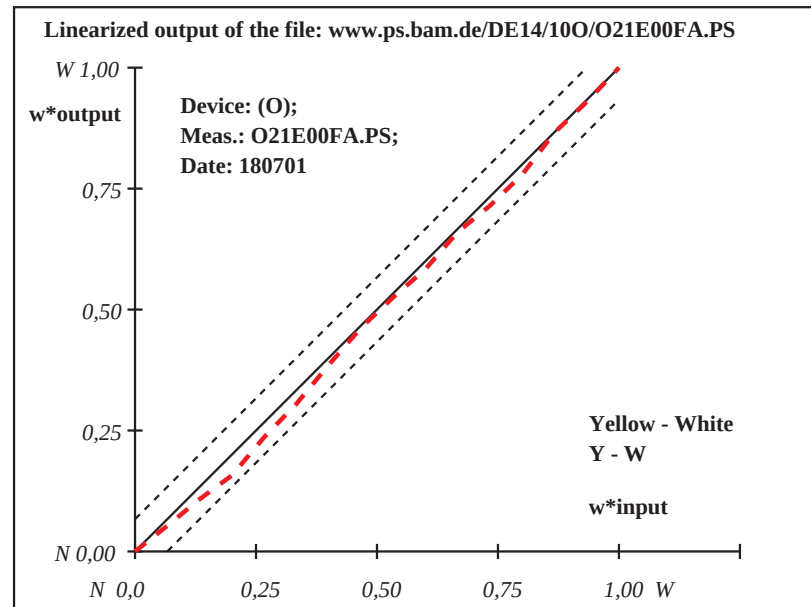

Device: (O); Meas.: O21E00FA.PS; Date: 180701


www.ps.bam.de/DE14/100/O21E00FA.PS

i	LAB*ref	LAB*out, relative	LAB*out/c-ref	ΔE^*
1	28.77 -0.87 -0.08	28.77 -0.87 -0.08	0.0 0.0 0.0	0.01
2	33.02 -0.95 -0.34	30.23 -0.9 -0.17	-2.78 0.06 0.17	2.8
3	37.27 -1.04 -0.61	32.71 -0.95 -0.32	-4.55 0.09 0.28	4.57
4	41.52 -1.12 -0.87	36.68 -1.03 -0.57	-4.83 0.1 0.3	4.85
5	45.77 -1.21 -1.14	41.54 -1.12 -0.87	-4.22 0.08 0.26	4.24
6	50.02 -1.29 -1.4	48.94 -1.27 -1.33	-1.07 0.02 0.07	1.08
7	54.27 -1.38 -1.66	53.96 -1.37 -1.65	-0.29 0.01 0.02	0.3
8	58.52 -1.46 -1.93	58.97 -1.47 -1.96	0.45 0.0 -0.02	0.45
9	62.76 -1.55 -2.19	64.28 -1.58 -2.29	1.52 -0.02 -0.08	1.52
10	67.01 -1.63 -2.46	69.39 -1.68 -2.6	2.38 -0.04 -0.14	2.38
11	71.26 -1.72 -2.72	74.35 -1.78 -2.91	3.09 -0.05 -0.18	3.1
12	75.51 -1.8 -2.98	78.78 -1.87 -3.19	3.26 -0.06 -0.19	3.27
13	79.76 -1.89 -3.25	82.89 -1.95 -3.44	3.13 -0.05 -0.18	3.14
14	84.01 -1.97 -3.51	86.77 -2.03 -3.68	2.76 -0.04 -0.16	2.76
15	88.26 -2.06 -3.78	90.38 -2.1 -3.91	2.12 -0.03 -0.12	2.12
16	92.51 -2.14 -4.04	92.51 -2.14 -4.04	0.0 0.0 0.0	0.01
17	28.77 -0.87 -0.08	28.77 -0.87 -0.08	0.0 0.0 0.0	0.01
18	44.71 -1.19 -1.07	40.32 -1.1 -0.8	-4.37 0.09 0.27	4.39
19	60.64 -1.51 -2.06	61.62 -1.52 -2.12	0.98 -0.01 -0.05	0.99
20	76.57 -1.82 -3.05	79.81 -1.89 -3.25	3.23 -0.05 -0.19	3.24
21	92.51 -2.14 -4.04	92.51 -2.14 -4.04	0.0 0.0 0.0	0.01

Start output S1
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 92.51 - 28.77$
Regularity
 $g^* = 54.2$
Lightness gamut rel. to offset
 $f^* = 82.4$
 ΔL^* -gray variation
 $v^* = 0.0$
Mean CIELAB difference (16 steps)
 $\Delta E^*_{CIELAB} = 2.3$
Mean CIELAB difference (5 steps)
 $\Delta L^*_{CIELAB} = 1.7$
Mean colour reproduction index: $R^*_{ab,m} = 90$

Device: (O); Meas.: O21E00NA.PS; Date: 180701

www.ps.bam.de/DE14/100/O21E00NA.PS

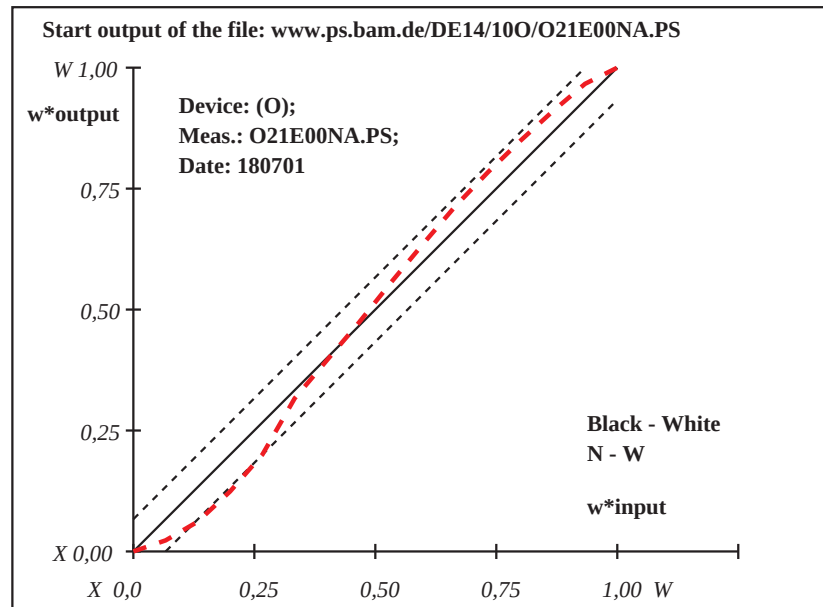

Device: (O); Meas.: O21E00NA.PS; Date: 180701


www.ps.bam.de/DE14/100/O21E00NA.PS

i	LAB*ref	LAB*out, relative	LAB*out/c-ref	ΔE^*
1	30.17 -0.59 0.21	30.17 -0.59 0.21	0.0 0.0 0.0	0.01
2	34.32 -0.75 -0.04	35.22 -0.78 -0.1	0.9 -0.02 -0.05	0.9
3	38.48 -0.91 -0.31	39.01 -0.93 -0.34	0.53 -0.01 -0.02	0.54
4	42.63 -1.06 -0.57	43.16 -1.08 -0.61	0.53 -0.01 -0.02	0.54
5	46.78 -1.22 -0.84	45.36 -1.17 -0.75	-1.41 0.05 0.09	1.43
6	50.93 -1.38 -1.1	50.18 -1.35 -1.06	-0.74 0.03 0.05	0.75
7	55.09 -1.54 -1.37	55.35 -1.55 -1.38	0.26 0.0 -0.01	0.26
8	59.24 -1.7 -1.63	59.1 -1.69 -1.62	-0.13 0.01 0.01	0.14
9	63.39 -1.85 -1.9	63.56 -1.86 -1.91	0.17 0.0 0.0	0.17
10	67.54 -2.01 -2.16	67.03 -1.99 -2.13	-0.5 0.02 0.03	0.51
11	71.7 -2.17 -2.43	72.11 -2.19 -2.45	0.42 -0.01 -0.02	0.42
12	75.85 -2.33 -2.69	76.58 -2.36 -2.74	0.73 -0.02 -0.04	0.73
13	80.0 -2.49 -2.96	80.54 -2.51 -2.99	0.53 -0.01 -0.02	0.54
14	84.15 -2.64 -3.22	85.29 -2.69 -3.29	1.14 -0.03 -0.06	1.14
15	88.31 -2.8 -3.49	89.2 -2.84 -3.54	0.9 -0.02 -0.05	0.9
16	92.46 -2.96 -3.75	92.46 -2.96 -3.75	0.0 0.0 0.0	0.01
17	30.17 -0.59 0.21	30.17 -0.59 0.21	0.0 0.0 0.0	0.01
18	45.74 -1.18 -0.77	44.81 -1.15 -0.71	-0.92 0.04 0.06	0.94
19	61.32 -1.78 -1.77	61.33 -1.78 -1.77	0.02 0.0 0.0	0.02
20	76.89 -2.37 -2.76	77.57 -2.39 -2.8	0.68 -0.02 -0.03	0.68
21	92.46 -2.96 -3.75	92.46 -2.96 -3.75	0.0 0.0 0.0	0.01

Linearized output S2
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 92.46 - 30.17$
Regularity
 $g^* = 88.6$
Lightness gamut rel. to offset
 $f^* = 80.5$
 ΔL^* -gray variation
 $v^* = 0.0$
Mean CIELAB difference (16 steps)
 $\Delta E^*_{CIELAB} = 0.6$
Mean CIELAB difference (5 steps)
 $\Delta L^*_{CIELAB} = 0.3$
Mean colour reproduction index: $R^*_{ab,m} = 98$

Device: (O); Meas.: O21E00FA.PS; Date: 180701

www.ps.bam.de/DE14/100/O21E00FA.PS

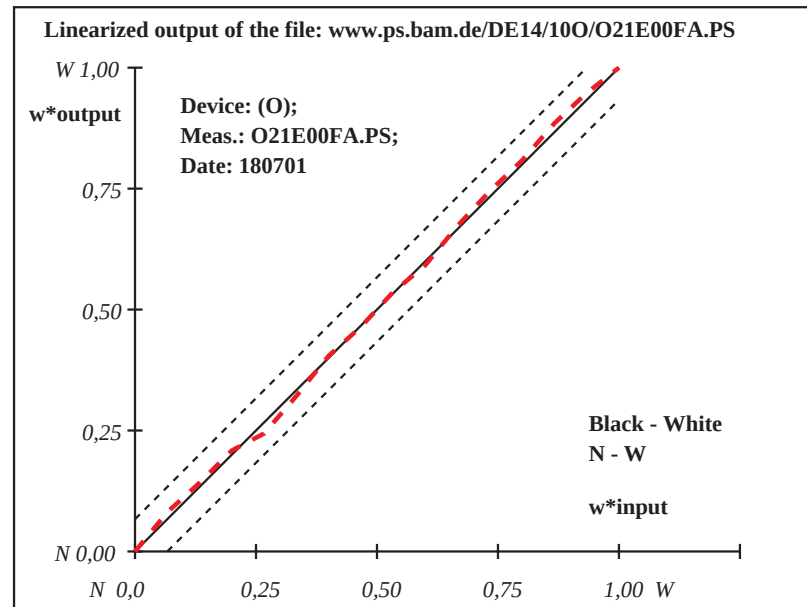

Device: (O); Meas.: O21E00FA.PS; Date: 180701


www.ps.bam.de/DE14/100/O21E00FA.PS

i	LAB*ref			LAB*out, relative			LAB*out/c-ref			ΔE^*
1	45.1	51.06	25.86	45.1	51.06	25.86	0.0	0.0	0.0	0.01
2	48.26	47.53	23.84	46.03	50.03	25.27	-2.22	2.49	1.43	3.64
3	51.42	44.01	21.81	46.69	49.29	24.84	-4.72	5.28	3.03	7.71
4	54.58	40.48	19.79	47.18	48.74	24.53	-7.39	8.26	4.74	12.06
5	57.74	36.95	17.76	47.76	48.09	24.15	-9.97	11.14	6.39	16.26
6	60.9	33.42	15.74	49.8	45.82	22.85	-11.09	12.39	7.11	18.09
7	64.06	29.9	13.72	53.1	42.13	20.73	-10.94	12.23	7.02	17.86
8	67.22	26.37	11.69	57.2	37.55	18.11	-10.0	11.18	6.41	16.32
9	70.37	22.84	9.67	63.25	30.8	14.23	-7.12	7.96	4.57	11.62
10	73.53	19.31	7.64	67.15	26.45	11.74	-6.38	7.13	4.09	10.41
11	76.69	15.79	5.62	75.15	17.51	6.61	-1.54	1.73	0.99	2.52
12	79.85	12.26	3.6	80.87	11.12	2.94	1.02	-1.13	-0.64	1.67
13	83.01	8.73	1.57	85.41	6.06	0.04	2.4	-2.67	-1.53	3.91
14	86.17	5.2	-0.44	89.83	1.11	-2.79	3.66	-4.08	-2.34	5.97
15	89.33	1.68	-2.47	91.83	-1.1	-4.07	2.5	-2.78	-1.59	4.07
16	92.49	-1.84	-4.49	92.49	-1.84	-4.49	0.0	0.0	0.0	0.01
17	45.1	51.06	25.86	45.1	51.06	25.86	0.0	0.0	0.0	0.01
18	56.95	37.83	18.27	47.62	48.25	24.25	-9.32	10.42	5.98	15.21
19	68.8	24.61	10.68	60.23	34.17	16.17	-8.56	9.57	5.49	13.97
20	80.64	11.38	3.09	82.01	9.85	2.22	1.37	-1.51	-0.86	2.23
21	92.49	-1.84	-4.49	92.49	-1.84	-4.49	0.0	0.0	0.0	0.01

Start output S1
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 92.49 - 45.1$
Regularity
 $g^* = 11.6$
Lightness gamut rel. to offset
 $f^* = 61.2$
 ΔL^* -gray variation
 $v^* = 0.0$
Mean CIELAB difference (16 steps)
 $\Delta E^*_{CIELAB} = 8.3$
Mean CIELAB difference (5 steps)
 $\Delta L^*_{CIELAB} = 6.3$
Mean colour reproduction index: $R^*_{ab,m} = 64$

Device: (O); Meas.: O21E00NA.PS; Date: 180701

www.ps.bam.de/DE14/100/O21E00NA.PS

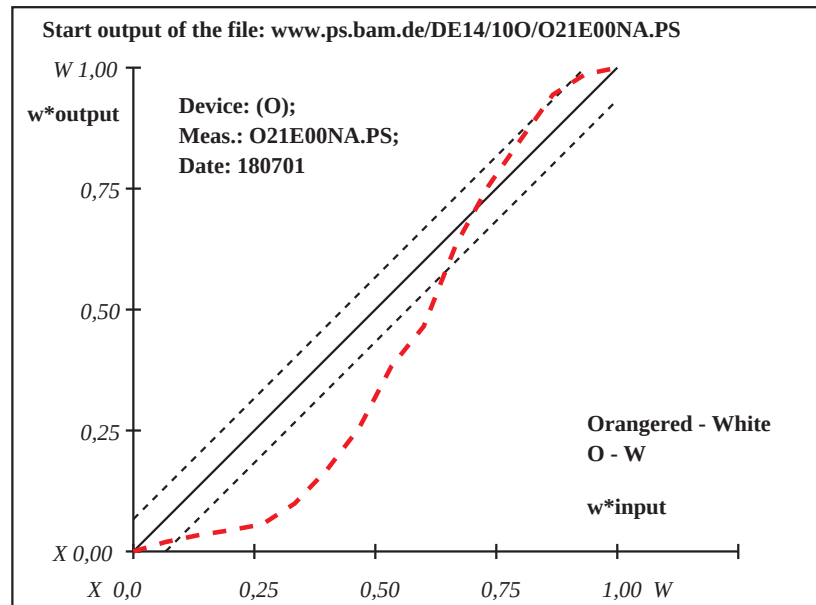

Device: (O); Meas.: O21E00NA.PS; Date: 180701


www.ps.bam.de/DE14/100/O21E00NA.PS

i	LAB*ref			LAB*out, relative			LAB*out/c-ref			ΔE^*
1	44.6	52.29	28.13	44.6	52.29	28.13	0.0	0.0	0.0	0.01
2	47.77	48.65	25.97	48.01	48.38	25.8	0.24	-0.26	-0.15	0.4
3	50.94	45.02	23.8	51.81	44.02	23.21	0.87	-0.99	-0.59	1.46
4	54.11	41.38	21.64	56.28	38.89	20.15	2.17	-2.48	-1.47	3.63
5	57.28	37.75	19.47	58.73	36.08	18.48	1.45	-1.65	-0.98	2.42
6	60.45	34.11	17.31	61.33	33.1	16.71	0.88	-1.0	-0.59	1.47
7	63.62	30.47	15.15	63.18	30.98	15.45	-0.43	0.51	0.3	0.74
8	66.79	26.84	12.98	66.85	26.77	12.94	0.06	-0.06	-0.03	0.1
9	69.96	23.2	10.82	69.86	23.31	10.88	-0.09	0.11	0.07	0.16
10	73.13	19.57	8.65	72.95	19.78	8.78	-0.17	0.21	0.13	0.31
11	76.3	15.93	6.49	77.15	14.96	5.91	0.85	-0.96	-0.57	1.42
12	79.47	12.29	4.33	80.19	11.46	3.83	0.72	-0.82	-0.48	1.21
13	82.64	8.66	2.16	83.13	8.1	1.83	0.49	-0.55	-0.32	0.81
14	85.81	5.02	0.0	86.8	3.89	-0.66	0.99	-1.12	-0.66	1.64
15	88.98	1.39	-2.16	89.26	1.06	-2.35	0.28	-0.31	-0.18	0.47
16	92.15	-2.24	-4.32	92.15	-2.24	-4.32	0.0	0.0	0.0	0.01
17	44.6	52.29	28.13	44.6	52.29	28.13	0.0	0.0	0.0	0.01
18	56.49	38.66	20.02	58.12	36.78	18.9	1.63	-1.86	-1.1	2.72
19	68.38	25.02	11.9	68.36	25.04	11.91	-0.01	0.02	0.01	0.03
20	80.26	11.39	3.79	80.93	10.62	3.33	0.66	-0.75	-0.44	1.11
21	92.15	-2.24	-4.32	92.15	-2.24	-4.32	0.0	0.0	0.0	0.01

Linearized output S2
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 92.15 - 44.6$
Regularity
 $g^* = 75.7$
Lightness gamut rel. to offset
 $f^* = 61.4$
 ΔL^* -gray variation
 $v^* = 0.0$
Mean CIELAB difference (16 steps)
 $\Delta E^*_{CIELAB} = 1.0$
Mean CIELAB difference (5 steps)
 $\Delta L^*_{CIELAB} = 0.8$
Mean colour reproduction index: $R^*_{ab,m} = 96$

Device: (O); Meas.: O21E00FA.PS; Date: 180701

www.ps.bam.de/DE14/100/O21E00FA.PS

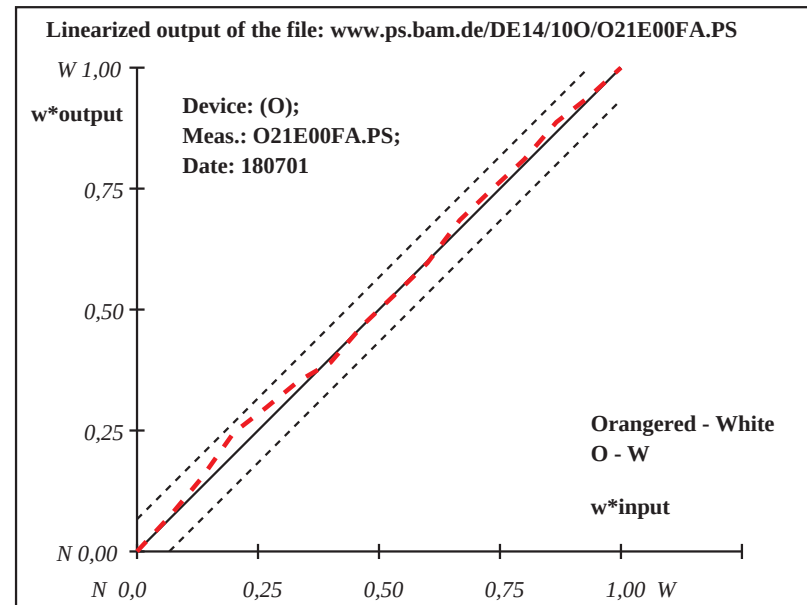

Device: (O); Meas.: O21E00FA.PS; Date: 180701

www.ps.bam.de/DE14/100/O21E00FA.PS


Output linearization of 16 colour steps according to ISO/IEC 15775; PS operator cmyn* setcmykcolor

i	LAB*ref	LAB*out, relative	LAB*out/c-ref	ΔE^*
1	44.31 -59.39 25.66	44.31 -59.39 25.66	0.0 0.0 0.0	0.01
2	47.51 -55.56 23.65	45.65 -57.78 24.82	-1.85 -2.21 1.16	3.12
3	50.71 -51.72 21.65	46.5 -56.77 24.29	-4.2 -5.03 2.64	7.08
4	53.91 -47.89 19.64	48.52 -54.34 23.02	-5.38 -6.45 3.38	9.06
5	57.12 -44.05 17.64	50.92 -51.47 21.52	-6.18 -7.41 3.88	10.41
6	60.32 -40.22 15.63	54.89 -46.72 19.03	-5.41 -6.49 3.4	9.12
7	63.52 -36.39 13.62	59.04 -41.75 16.43	-4.47 -5.36 2.81	7.54
8	66.72 -32.55 11.62	62.47 -37.64 14.28	-4.24 -5.07 2.66	7.14
9	69.92 -28.72 9.61	65.31 -34.24 12.5	-4.6 -5.51 2.89	7.75
10	73.12 -24.88 7.61	70.29 -28.28 9.38	-2.83 -3.39 1.78	4.77
11	76.32 -21.05 5.6	74.16 -23.64 6.95	-2.15 -2.58 1.35	3.64
12	79.52 -17.22 3.59	78.83 -18.04 4.03	-0.68 -0.82 0.43	1.16
13	82.73 -13.38 1.59	82.51 -13.64 1.73	-0.21 -0.25 0.14	0.37
14	85.93 -9.55 -0.41	85.57 -9.97 -0.18	-0.35 -0.42 0.22	0.6
15	89.13 -5.71 -2.41	89.48 -5.3 -2.63	0.35 0.42 -0.21	0.59
16	92.33 -1.88 -4.42	92.33 -1.88 -4.42	0.0 0.0 0.0	0.01
17	44.31 -59.39 25.66	44.31 -59.39 25.66	0.0 0.0 0.0	0.01
18	56.32 -45.01 18.14	50.32 -52.19 21.89	-5.98 -7.17 3.75	10.07
19	68.32 -30.64 10.62	63.89 -35.94 13.39	-4.42 -5.29 2.78	7.45
20	80.32 -16.26 3.09	79.75 -16.94 3.45	-0.56 -0.68 0.36	0.96
21	92.33 -1.88 -4.42	92.33 -1.88 -4.42	0.0 0.0 0.0	0.01

Start output S1
Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 92.33 - 44.31$
Regularity
 $g^* = 37.9$
Lightness gamut rel. to offset
 $f^* = 62.0$
 ΔL^* -gray variation
 $v^* = 0.0$
Mean CIELAB difference (16 steps)
 $\Delta E^*_{CIELAB} = 4.5$
Mean CIELAB difference (5 steps)
 $\Delta L^*_{CIELAB} = 3.7$
Mean colour reproduction index: $R^*_{ab,m} = 80$

Device: (O); Meas.: O21E00NA.PS; Date: 180701

www.ps.bam.de/DE14/100/O21E00NA.PS

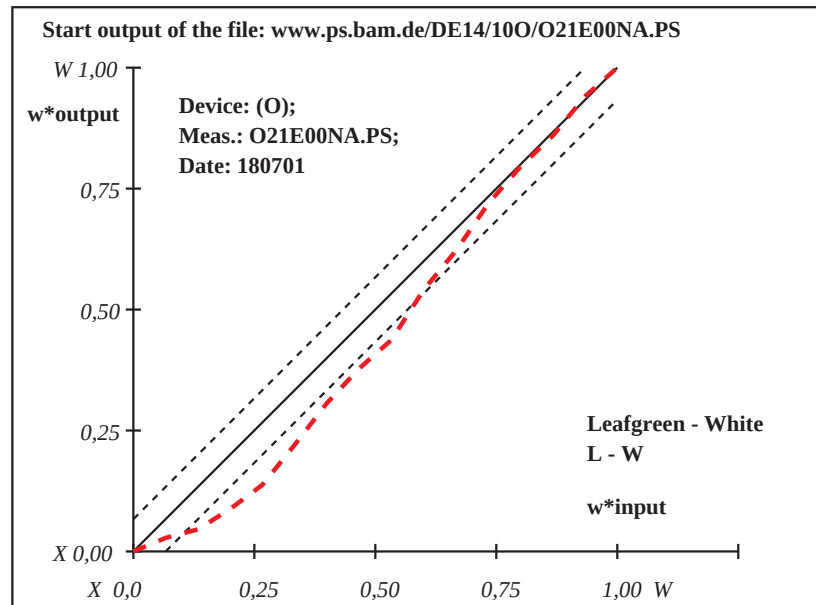

Device: (O); Meas.: O21E00NA.PS; Date: 180701


www.ps.bam.de/DE14/100/O21E00NA.PS

i	LAB*ref	LAB*out, relative	LAB*out/c-ref	ΔE^*
1	44.71 -61.15 26.92	44.71 -61.15 26.92	0.0 0.0 0.0	0.01
2	47.88 -57.23 24.85	48.05 -57.02 24.74	0.17 0.21 -0.1	0.29
3	51.05 -53.3 22.78	50.51 -53.97 23.13	-0.53 -0.66 0.35	0.93
4	54.22 -49.38 20.71	53.91 -49.77 20.92	-0.31 -0.38 0.21	0.54
5	57.4 -45.45 18.64	56.1 -47.05 19.48	-1.28 -1.59 0.84	2.22
6	60.57 -41.53 16.57	59.05 -43.41 17.57	-1.51 -1.87 0.99	2.61
7	63.74 -37.61 14.5	63.37 -38.07 14.75	-0.36 -0.45 0.24	0.64
8	66.91 -33.68 12.43	66.28 -34.46 12.85	-0.62 -0.77 0.41	1.09
9	70.08 -29.76 10.37	69.02 -31.07 11.06	-1.05 -1.3 0.69	1.82
10	73.25 -25.83 8.3	72.56 -26.69 8.75	-0.68 -0.85 0.45	1.19
11	76.42 -21.91 6.23	76.76 -21.49 6.01	0.34 0.42 -0.21	0.58
12	79.59 -17.99 4.16	79.29 -18.36 4.35	-0.29 -0.36 0.2	0.52
13	82.77 -14.06 2.09	82.44 -14.47 2.3	-0.32 -0.4 0.21	0.56
14	85.94 -10.14 0.02	86.65 -9.26 -0.43	0.71 0.88 -0.45	1.22
15	89.11 -6.21 -2.04	88.97 -6.39 -1.95	-0.13 -0.16 0.09	0.24
16	92.28 -2.29 -4.11	92.28 -2.29 -4.11	0.0 0.0 0.0	0.01
17	44.71 -61.15 26.92	44.71 -61.15 26.92	0.0 0.0 0.0	0.01
18	56.6 -46.44 19.16	55.56 -47.73 19.84	-1.04 -1.29 0.68	1.8
19	68.49 -31.72 11.4	67.65 -32.77 11.95	-0.84 -1.04 0.55	1.45
20	80.39 -17.01 3.64	80.08 -17.39 3.84	-0.3 -0.37 0.2	0.53
21	92.28 -2.29 -4.11	92.28 -2.29 -4.11	0.0 0.0 0.0	0.01

Linearized output S2
Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 92.28 - 44.71$
Regularity
 $g^* = 87.3$
Lightness gamut rel. to offset
 $f^* = 61.5$
 ΔL^* -gray variation
 $v^* = 0.0$
Mean CIELAB difference (16 steps)
 $\Delta E^*_{CIELAB} = 0.9$
Mean CIELAB difference (5 steps)
 $\Delta L^*_{CIELAB} = 0.8$
Mean colour reproduction index: $R^*_{ab,m} = 96$

Device: (O); Meas.: O21E00FA.PS; Date: 180701

www.ps.bam.de/DE14/100/O21E00FA.PS

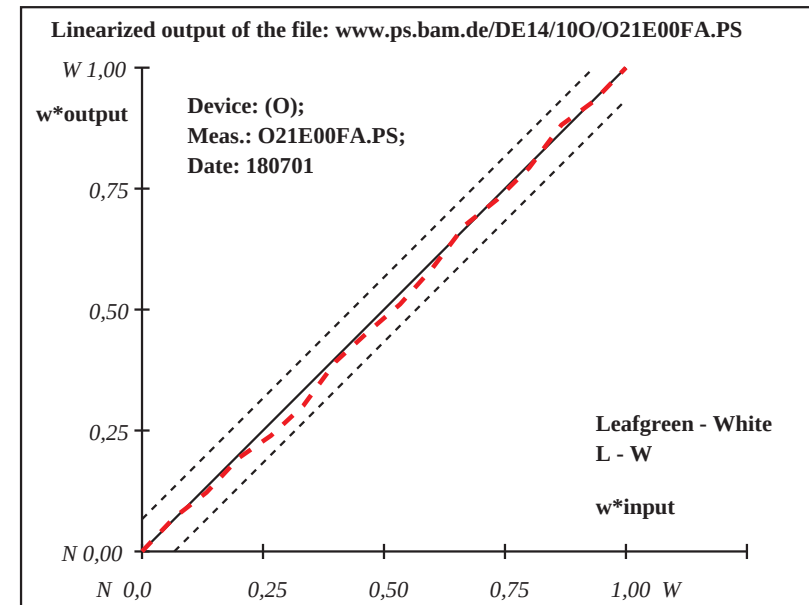

Device: (O); Meas.: O21E00FA.PS; Date: 180701


www.ps.bam.de/DE14/100/O21E00FA.PS

i	LAB*ref	LAB*out, relative	LAB*out/c-ref	ΔE^*
1	25.18 11.84 -20.42	25.18 11.84 -20.42	0.0 0.0 0.0	0.01
2	29.65 10.93 -19.36	27.12 11.45 -19.96	-2.52 0.51 -0.59	2.65
3	34.12 10.03 -18.29	28.82 11.1 -19.55	-5.29 1.07 -1.25	5.55
4	38.59 9.12 -17.23	30.46 10.77 -19.16	-8.11 1.65 -1.92	8.51
5	43.06 8.22 -16.16	32.82 10.29 -18.6	-10.23 2.07 -2.43	10.73
6	47.53 7.31 -15.1	35.79 9.69 -17.9	-11.73 2.38 -2.79	12.3
7	52.0 6.41 -14.04	40.03 8.83 -16.88	-11.96 2.42 -2.84	12.54
8	56.47 5.5 -12.97	44.42 7.94 -15.84	-12.04 2.44 -2.86	12.62
9	60.93 4.6 -11.91	50.29 6.75 -14.44	-10.64 2.16 -2.53	11.16
10	65.4 3.69 -10.84	56.22 5.55 -13.03	-9.18 1.86 -2.18	9.63
11	69.87 2.79 -9.78	63.66 4.05 -11.26	-6.2 1.26 -1.47	6.51
12	74.34 1.88 -8.72	71.25 2.51 -9.45	-3.08 0.63 -0.73	3.24
13	78.81 0.98 -7.65	77.54 1.23 -7.95	-1.26 0.26 -0.29	1.33
14	83.28 0.07 -6.59	85.13 -0.29 -6.15	1.85 -0.36 0.44	1.94
15	87.75 -0.82 -5.52	89.82 -1.24 -5.03	2.07 -0.41 0.49	2.16
16	92.22 -1.73 -4.46	92.22 -1.73 -4.46	0.0 0.0 0.0	0.01
17	25.18 11.84 -20.42	25.18 11.84 -20.42	0.0 0.0 0.0	0.01
18	41.94 8.45 -16.43	32.23 10.41 -18.74	-9.7 1.97 -2.3	10.17
19	58.7 5.05 -12.44	47.35 7.35 -15.14	-11.34 2.3 -2.69	11.89
20	75.46 1.66 -8.45	72.82 2.19 -9.08	-2.63 0.53 -0.62	2.76
21	92.22 -1.73 -4.46	92.22 -1.73 -4.46	0.0 0.0 0.0	0.01

Start output S1
Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 92.22 - 25.18$
Regularity
 $g^* = 27.7$
Lightness gamut rel. to offset
 $f^* = 86.6$
 ΔL^* -gray variation
 $v^* = 0.0$
Mean CIELAB difference (16 steps)
 $\Delta E^*_{CIELAB} = 6.3$
Mean CIELAB difference (5 steps)
 $\Delta L^*_{CIELAB} = 5.0$
Mean colour reproduction index: $R^*_{ab,m} = 72$

Device: (O); Meas.: O21E00NA.PS; Date: 180701

www.ps.bam.de/DE14/100/O21E00NA.PS

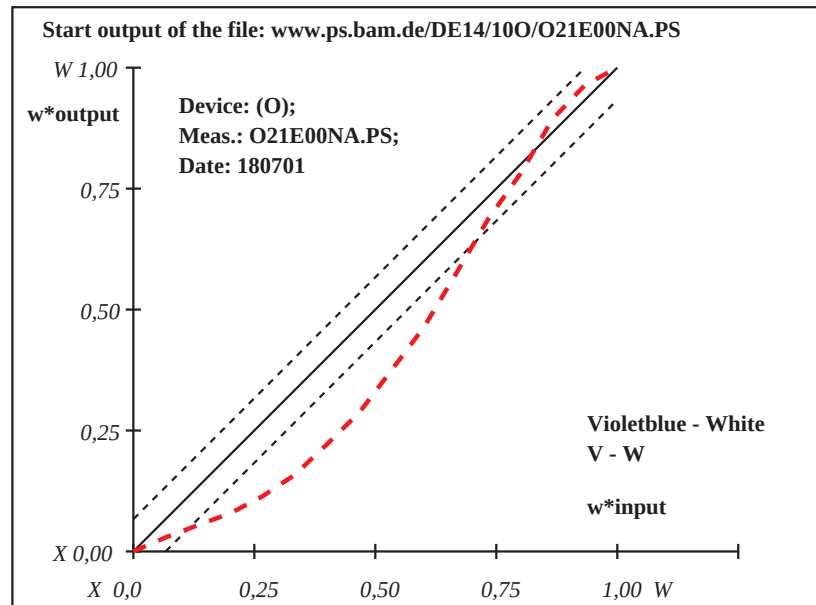

Device: (O); Meas.: O21E00NA.PS; Date: 180701


www.ps.bam.de/DE14/100/O21E00NA.PS

i	LAB*ref	LAB*out, relative	LAB*out/c-ref	ΔE^*
1	25.38 12.83 -22.49	25.38 12.83 -22.49	0.0 0.0 0.0	0.01
2	29.83 11.82 -21.27	28.73 12.07 -21.57	-1.1 0.25 -0.29	1.18
3	34.29 10.82 -20.04	31.96 11.34 -20.68	-2.32 0.53 -0.63	2.47
4	38.74 9.81 -18.82	37.52 10.09 -19.15	-1.21 0.28 -0.33	1.3
5	43.2 8.81 -17.59	41.47 9.2 -18.07	-1.71 0.39 -0.46	1.83
6	47.65 7.8 -16.37	46.56 8.05 -16.67	-1.08 0.25 -0.29	1.15
7	52.1 6.79 -15.14	51.41 6.95 -15.33	-0.69 0.16 -0.18	0.74
8	56.56 5.79 -13.92	53.83 6.4 -14.67	-2.72 0.62 -0.74	2.9
9	61.01 4.78 -12.69	59.15 5.2 -13.21	-1.86 0.42 -0.5	1.98
10	65.47 3.78 -11.47	64.05 4.1 -11.86	-1.41 0.32 -0.38	1.51
11	69.92 2.77 -10.24	68.16 3.17 -10.73	-1.75 0.4 -0.47	1.86
12	74.37 1.76 -9.02	73.89 1.87 -9.15	-0.48 0.11 -0.12	0.52
13	78.83 0.76 -7.79	78.38 0.86 -7.92	-0.44 0.1 -0.11	0.48
14	83.28 -0.24 -6.57	83.36 -0.26 -6.55	0.08 -0.01 0.02	0.08
15	87.74 -1.24 -5.34	87.58 -1.21 -5.39	-0.15 0.04 -0.03	0.17
16	92.19 -2.25 -4.12	92.19 -2.25 -4.12	0.0 0.0 0.0	0.01
17	25.38 12.83 -22.49	25.38 12.83 -22.49	0.0 0.0 0.0	0.01
18	42.08 9.06 -17.9	40.48 9.42 -18.34	-1.59 0.36 -0.43	1.7
19	58.79 5.29 -13.31	56.49 5.8 -13.94	-2.29 0.52 -0.62	2.44
20	75.49 1.51 -8.71	75.01 1.62 -8.84	-0.47 0.11 -0.12	0.51
21	92.19 -2.25 -4.12	92.19 -2.25 -4.12	0.0 0.0 0.0	0.01

Linearized output S2
Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 92.19 - 25.38$
Regularity
 $g^* = 81.5$
Lightness gamut rel. to offset
 $f^* = 86.3$
 ΔL^* -gray variation
 $v^* = 0.0$
Mean CIELAB difference (16 steps)
 $\Delta E^*_{CIELAB} = 1.1$
Mean CIELAB difference (5 steps)
 $\Delta L^*_{CIELAB} = 0.9$
Mean colour reproduction index: $R^*_{ab,m} = 95$

Device: (O); Meas.: O21E00FA.PS; Date: 180701

www.ps.bam.de/DE14/100/O21E00FA.PS

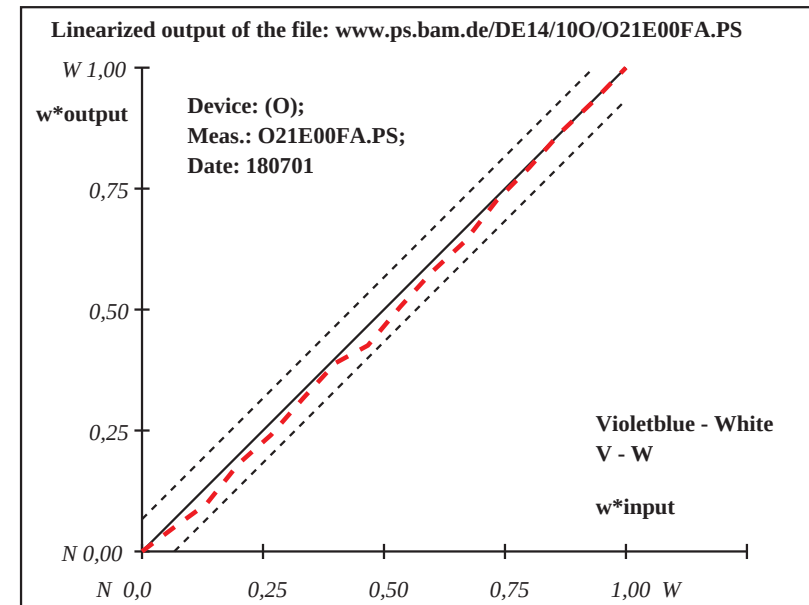


Device: (O); Meas.: O21E00FA.PS; Date: 180701

www.ps.bam.de/DE14/100/O21E00FA.PS

i	LAB*ref			LAB*out, relative			LAB*out/c-ref			ΔE^*	Start output S1 Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G relative CIELAB data used for "out" $\Delta L^* = 92.27 - 31.49$ Regularity $g^* = 20.1$ Lightness gamut rel. to offset $f^* = 78.5$ ΔL^*-gray variation $v^* = 0.0$ Mean CIELAB difference (16 steps) $\Delta E^*_{CIELAB} = 7.3$ Mean CIELAB difference (5 steps) $\Delta L^*_{CIELAB} = 6.2$ Mean colour reproduction index: $R^*_{ab,m} = 68$
1	31.49	-7.66	6.36	31.49	-7.66	6.36	0.0	0.0	0.0	0.01	
2	35.54	-7.29	5.64	33.87	-7.44	5.94	-1.66	-0.14	0.3	1.7	
3	39.59	-6.91	4.93	35.08	-7.33	5.72	-4.5	-0.41	0.8	4.6	
4	43.65	-6.54	4.21	36.16	-7.23	5.53	-7.48	-0.68	1.33	7.63	
5	47.7	-6.16	3.49	37.44	-7.11	5.31	-10.24	-0.94	1.82	10.46	
6	51.75	-5.79	2.77	39.31	-6.94	4.98	-12.43	-1.14	2.2	12.68	Linearized output S2 Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G relative CIELAB data used for "out" $\Delta L^* = 92.05 - 31.22$ Regularity $g^* = 74.5$ Lightness gamut rel. to offset $f^* = 78.6$ ΔL^*-gray variation $v^* = 0.0$ Mean CIELAB difference (16 steps) $\Delta E^*_{CIELAB} = 1.3$ Mean CIELAB difference (5 steps) $\Delta L^*_{CIELAB} = 1.0$ Mean colour reproduction index: $R^*_{ab,m} = 94$
7	55.8	-5.41	2.06	42.29	-6.66	4.45	-13.5	-1.24	2.39	13.77	
8	59.85	-5.04	1.34	43.45	-6.55	4.24	-16.4	-1.51	2.9	16.73	
9	63.91	-4.66	0.62	46.94	-6.23	3.62	-16.96	-1.56	3.0	17.3	
10	67.96	-4.29	-0.09	55.0	-5.49	2.2	-12.94	-1.19	2.29	13.21	
11	72.01	-3.91	-0.8	62.55	-4.79	0.86	-9.45	-0.86	1.67	9.65	
12	76.06	-3.54	-1.52	71.49	-3.96	-0.71	-4.57	-0.41	0.81	4.67	
13	80.11	-3.16	-2.24	78.14	-3.35	-1.89	-1.96	-0.17	0.35	2.01	
14	84.17	-2.79	-2.96	84.83	-2.73	-3.07	0.67	0.06	-0.11	0.68	
15	88.22	-2.41	-3.67	89.7	-2.28	-3.94	1.48	0.14	-0.25	1.51	
16	92.27	-2.04	-4.39	92.27	-2.04	-4.39	0.0	0.0	0.0	0.01	
17	31.49	-7.66	6.36	31.49	-7.66	6.36	0.0	0.0	0.0	0.01	Linearized output S2 Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G relative CIELAB data used for "out" $\Delta L^* = 92.05 - 31.22$ Regularity $g^* = 74.5$ Lightness gamut rel. to offset $f^* = 78.6$ ΔL^*-gray variation $v^* = 0.0$ Mean CIELAB difference (16 steps) $\Delta E^*_{CIELAB} = 1.3$ Mean CIELAB difference (5 steps) $\Delta L^*_{CIELAB} = 1.0$ Mean colour reproduction index: $R^*_{ab,m} = 94$
18	46.69	-6.26	3.67	37.12	-7.14	5.36	-9.55	-0.87	1.69	9.75	
19	61.88	-4.85	0.98	45.19	-6.39	3.93	-16.68	-1.53	2.95	17.02	
20	77.07	-3.45	-1.7	73.15	-3.81	-1.0	-3.92	-0.35	0.7	4.0	
21	92.27	-2.04	-4.39	92.27	-2.04	-4.39	0.0	0.0	0.0	0.01	

Device: (O); Meas.: O21E00NA.PS; Date: 180701

www.ps.bam.de/DE14/100/O21E00NA.PS

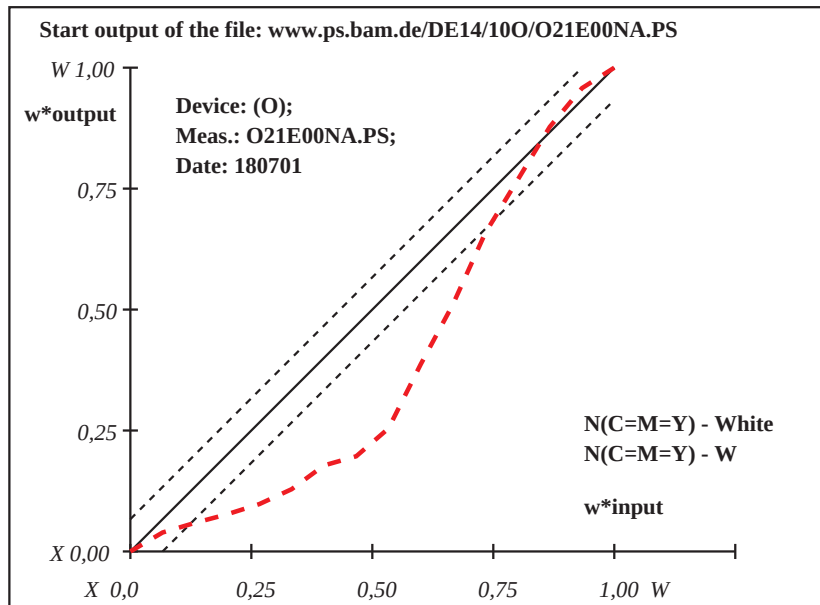


Device: (O); Meas.: O21E00NA.PS; Date: 180701

www.ps.bam.de/DE14/100/O21E00NA.PS

i	LAB*ref			LAB*out, relative			LAB*out/c-ref			ΔE^*	Start output S1 Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G relative CIELAB data used for "out" $\Delta L^* = 92.27 - 31.49$ Regularity $g^* = 20.1$ Lightness gamut rel. to offset $f^* = 78.5$ ΔL^*-gray variation $v^* = 0.0$ Mean CIELAB difference (16 steps) $\Delta E^*_{CIELAB} = 7.3$ Mean CIELAB difference (5 steps) $\Delta L^*_{CIELAB} = 6.2$ Mean colour reproduction index: $R^*_{ab,m} = 68$
1	31.22	-7.98	6.58	31.22	-7.98	6.58	0.0	0.0	0.0	0.01	
2	35.28	-7.58	5.85	34.23	-7.69	6.04	-1.04	-0.09	0.19	1.07	
3	39.33	-7.19	5.12	37.64	-7.35	5.42	-1.68	-0.16	0.3	1.73	
4	43.39	-6.79	4.39	39.03	-7.22	5.17	-4.34	-0.41	0.78	4.44	
5	47.44	-6.4	3.66	45.16	-6.62	4.07	-2.27	-0.21	0.41	2.33	
6	51.5	-6.0	2.93	49.01	-6.24	3.38	-2.48	-0.23	0.45	2.54	Linearized output S2 Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G relative CIELAB data used for "out" $\Delta L^* = 92.05 - 31.22$ Regularity $g^* = 74.5$ Lightness gamut rel. to offset $f^* = 78.6$ ΔL^*-gray variation $v^* = 0.0$ Mean CIELAB difference (16 steps) $\Delta E^*_{CIELAB} = 1.3$ Mean CIELAB difference (5 steps) $\Delta L^*_{CIELAB} = 1.0$ Mean colour reproduction index: $R^*_{ab,m} = 94$
7	55.55	-5.6	2.2	54.28	-5.73	2.43	-1.26	-0.11	0.23	1.3	
8	59.61	-5.21	1.47	57.0	-5.46	1.94	-2.6	-0.24	0.47	2.66	
9	63.66	-4.81	0.74	62.63	-4.91	0.93	-1.02	-0.09	0.19	1.05	
10	67.72	-4.42	0.01	66.71	-4.51	0.19	-1.0	-0.09	0.18	1.03	
11	71.77	-4.02	-0.71	70.16	-4.18	-0.42	-1.61	-0.15	0.29	1.65	
12	75.83	-3.62	-1.44	75.53	-3.65	-1.39	-0.28	-0.02	0.05	0.3	
13	79.88	-3.23	-2.17	79.25	-3.29	-2.06	-0.63	-0.05	0.11	0.65	
14	83.94	-2.83	-2.9	84.01	-2.83	-2.91	0.07	0.01	0.0	0.07	
15	87.99	-2.44	-3.63	88.38	-2.4	-3.7	0.39	0.04	-0.06	0.4	
16	92.05	-2.04	-4.36	92.05	-2.04	-4.36	0.0	0.0	0.0	0.01	
17	31.22	-7.98	6.58	31.22	-7.98	6.58	0.0	0.0	0.0	0.01	Linearized output S2 Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G relative CIELAB data used for "out" $\Delta L^* = 92.05 - 31.22$ Regularity $g^* = 74.5$ Lightness gamut rel. to offset $f^* = 78.6$ ΔL^*-gray variation $v^* = 0.0$ Mean CIELAB difference (16 steps) $\Delta E^*_{CIELAB} = 1.3$ Mean CIELAB difference (5 steps) $\Delta L^*_{CIELAB} = 1.0$ Mean colour reproduction index: $R^*_{ab,m} = 94$
18	46.43	-6.5	3.84	43.63	-6.77	4.35	-2.79	-0.26	0.5	2.86	
19	61.64	-5.01	1.11	59.81	-5.19	1.43	-1.81	-0.17	0.33	1.86	
20	76.84	-3.53	-1.62	76.46	-3.56	-1.55	-0.37	-0.03	0.07	0.39	
21	92.05	-2.04	-4.36	92.05	-2.04	-4.36	0.0	0.0	0.0	0.01	

Device: (O); Meas.: O21E00FA.PS; Date: 180701

www.ps.bam.de/DE14/100/O21E00FA.PS

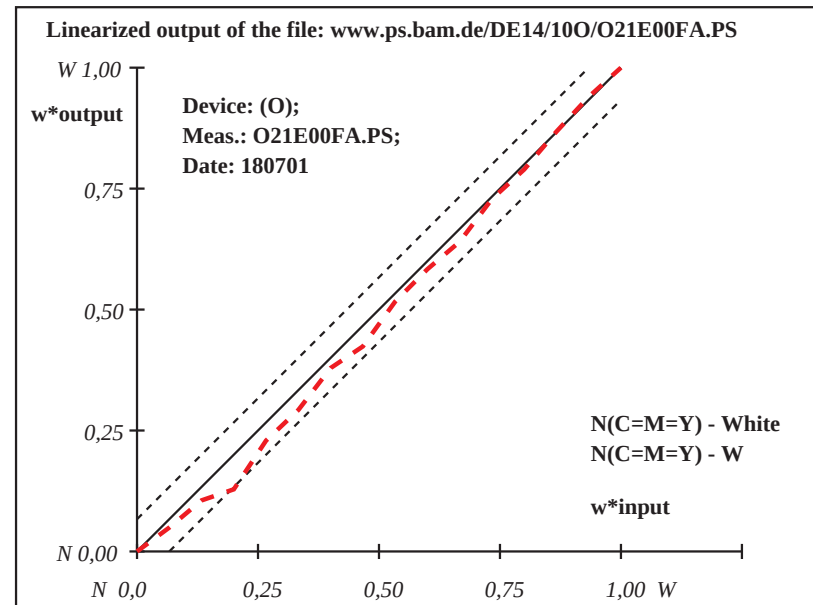

Device: (O); Meas.: O21E00FA.PS; Date: 180701

www.ps.bam.de/DE14/100/O21E00FA.PS

Output linearization of 16 colour steps according to ISO/IEC 15775; PS operator cmyn* setcmykcolor