


i	LAB*ref	LAB*out, relative	LAB*out/c-ref	ΔE^*	Start output S1
1	50.2 -26.08 -45.74	50.2 -26.08 -45.74	0.0 0.0 0.0	0.01	Specification according to
2	53.03 -24.51 -42.9	51.03 -25.62 -44.91	-1.99 -1.1 -2.0	3.05	ISO/IEC 15775 Annex G
3	55.86 -22.94 -40.06	51.43 -25.4 -44.51	-4.42 -2.44 -4.43	6.74	and DIN 33866-1 Annex G
4	58.69 -21.38 -37.22	53.1 -24.47 -42.83	-5.58 -3.09 -5.6	8.51	relative CIELAB data used for "out"
5	61.52 -19.81 -34.38	54.64 -23.62 -41.29	-6.87 -3.8 -6.9	10.47	$\Delta L^* = 92.65 - 50.2$
6	64.35 -18.24 -31.54	56.57 -22.55 -39.35	-7.77 -4.3 -7.8	11.83	Regularity
7	67.18 -16.67 -28.7	61.22 -19.97 -34.68	-5.95 -3.29 -5.97	9.06	$g^* = 28.3$
8	70.01 -15.1 -25.86	64.53 -18.14 -31.36	-5.47 -3.02 -5.48	8.33	Lightness gamut rel. to offset
9	72.84 -13.54 -23.03	67.39 -16.56 -28.49	-5.44 -3.01 -5.46	8.29	$f^* = 54.8$
10	75.67 -11.97 -20.19	71.2 -14.44 -24.67	-4.46 -2.47 -4.47	6.8	ΔL^* -gray variation
11	78.5 -10.4 -17.35	75.38 -12.13 -20.48	-3.11 -1.72 -3.12	4.75	$v^* = 0.0$
12	81.33 -8.83 -14.51	79.2 -10.01 -16.65	-2.12 -1.17 -2.13	3.24	Mean CIELAB difference (16 steps)
13	84.16 -7.26 -11.67	83.49 -7.63 -12.34	-0.66 -0.36 -0.66	1.02	$\Delta E^*_{CIELAB} = 5.3$
14	86.99 -5.7 -8.83	87.69 -5.31 -8.13	0.7 0.39 0.7	1.07	
15	89.82 -4.13 -5.99	90.8 -3.58 -5.01	0.98 0.54 0.98	1.49	
16	92.65 -2.56 -3.15	92.65 -2.56 -3.15	0.0 0.0 0.0	0.01	
17	50.2 -26.08 -45.74	50.2 -26.08 -45.74	0.0 0.0 0.0	0.01	
18	60.81 -20.2 -35.09	54.25 -23.84 -41.68	-6.55 -3.63 -6.57	9.98	
19	71.43 -14.32 -24.45	65.96 -17.35 -29.93	-5.45 -3.02 -5.47	8.31	
20	82.04 -8.44 -13.8	80.27 -9.42 -15.57	-1.76 -0.97 -1.76	2.69	
21	92.65 -2.56 -3.15	92.65 -2.56 -3.15	0.0 0.0 0.0	0.01	
Mean colour reproduction index: $R^*_{ab,m} = 77$					

Device: (O); Meas.: O41E00NA.PS; Date: 180701

www.ps.bam.de/DE14/100/O41E00NA.PS

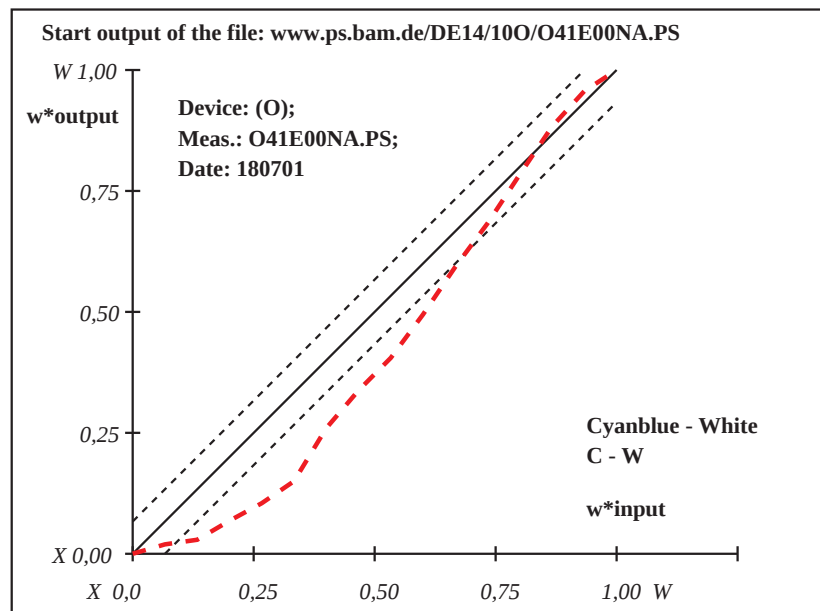

Device: (O); Meas.: O41E00NA.PS; Date: 180701


www.ps.bam.de/DE14/100/O41E00NA.PS

Output linearization of 16 colour steps according to ISO/IEC 15775; PS operator cmyn* setcmykcolor

i	LAB*ref	LAB*out, relative	LAB*out/c-ref	ΔE^*	Linearized output S2
1	50.36 -26.84 -45.48	50.36 -26.84 -45.48	0.0 0.0 0.0	0.01	Specification according to
2	53.14 -25.25 -42.67	52.35 -25.7 -43.47	-0.78 -0.44 -0.79	1.21	ISO/IEC 15775 Annex G
3	55.92 -23.67 -39.85	54.89 -24.25 -40.89	-1.02 -0.58 -1.03	1.57	and DIN 33866-1 Annex G
4	58.7 -22.08 -37.04	58.11 -22.41 -37.63	-0.58 -0.32 -0.58	0.9	relative CIELAB data used for "out"
5	61.48 -20.49 -34.23	58.87 -21.98 -36.87	-2.6 -1.48 -2.63	4.0	$\Delta L^* = 92.06 - 50.36$
6	64.26 -18.9 -31.41	60.67 -20.95 -35.04	-3.58 -2.04 -3.62	5.5	Regularity
7	67.04 -17.32 -28.6	65.0 -18.48 -30.66	-2.03 -1.15 -2.05	3.12	$g^* = 72.6$
8	69.82 -15.73 -25.79	68.71 -16.36 -26.91	-1.1 -0.62 -1.11	1.7	Lightness gamut rel. to offset
9	72.6 -14.14 -22.97	71.58 -14.72 -24.01	-1.01 -0.57 -1.02	1.56	$f^* = 53.9$
10	75.38 -12.55 -20.16	73.81 -13.45 -21.75	-1.56 -0.89 -1.58	2.41	ΔL^* -gray variation
11	78.16 -10.97 -17.35	78.18 -10.96 -17.33	0.02 0.01 0.02	0.03	$v^* = 0.0$
12	80.94 -9.38 -14.53	80.38 -9.7 -15.1	-0.55 -0.31 -0.55	0.85	Mean CIELAB difference (16 steps)
13	83.72 -7.79 -11.72	83.78 -7.76 -11.66	0.06 0.03 0.06	0.09	$\Delta E^*_{CIELAB} = 1.5$
14	86.5 -6.2 -8.91	86.28 -6.33 -9.13	-0.21 -0.11 -0.21	0.34	
15	89.28 -4.62 -6.09	89.67 -4.39 -5.7	0.39 0.22 0.4	0.6	
16	92.06 -3.03 -3.28	92.06 -3.03 -3.28	0.0 0.0 0.0	0.01	
17	50.36 -26.84 -45.48	50.36 -26.84 -45.48	0.0 0.0 0.0	0.01	
18	60.79 -20.89 -34.93	58.68 -22.09 -37.06	-2.1 -1.19 -2.12	3.23	
19	71.21 -14.94 -24.38	70.15 -15.54 -25.46	-1.05 -0.6 -1.07	1.63	
20	81.63 -8.98 -13.83	81.23 -9.21 -14.24	-0.39 -0.22 -0.4	0.62	
21	92.06 -3.03 -3.28	92.06 -3.03 -3.28	0.0 0.0 0.0	0.01	
Mean colour reproduction index: $R^*_{ab,m} = 94$					

Device: (O); Meas.: O41E00FA.PS; Date: 180701

www.ps.bam.de/DE14/100/O41E00FA.PS

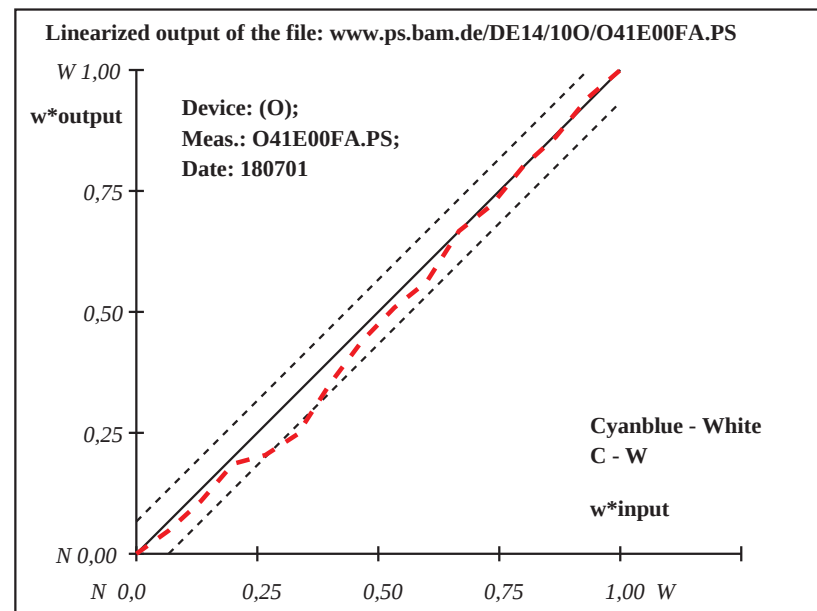


Device: (O); Meas.: O41E00FA.PS; Date: 180701

www.ps.bam.de/DE14/100/O41E00FA.PS

i	LAB*ref			LAB*out, relative			LAB*out/c-ref			ΔE^*	Start output S1 Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G relative CIELAB data used for "out"
1	43.4	66.68	-2.21	43.4	66.68	-2.21	0.0	0.0	0.0	0.01	
2	46.67	62.09	-2.31	44.47	65.18	-2.24	-2.19	3.09	0.07	3.79	
3	49.93	57.51	-2.41	45.79	63.32	-2.28	-4.13	5.81	0.12	7.13	
4	53.2	52.92	-2.5	48.03	60.18	-2.35	-5.16	7.25	0.16	8.91	$\Delta L^* = 92.39 - 43.4$
5	56.46	48.34	-2.6	49.64	57.91	-2.4	-6.81	9.58	0.2	11.76	Regularity
6	59.73	43.75	-2.7	51.31	55.58	-2.45	-8.41	11.82	0.25	14.52	$g^* = 30.4$
7	63.0	39.17	-2.8	56.1	48.84	-2.59	-6.88	9.68	0.21	11.88	Lightness gamut rel. to offset
8	66.26	34.58	-2.9	59.16	44.56	-2.68	-7.09	9.97	0.21	12.25	$f^* = 63.3$
9	69.53	30.0	-2.99	63.11	39.0	-2.8	-6.41	9.01	0.19	11.06	ΔL^* -gray variation
10	72.79	25.41	-3.09	68.08	32.03	-2.95	-4.71	6.62	0.14	8.13	$v^* = 0.0$
11	76.06	20.83	-3.19	74.61	22.86	-3.15	-1.44	2.04	0.04	2.5	Mean CIELAB difference (16 steps)
12	79.33	16.24	-3.29	78.9	16.84	-3.28	-0.42	0.6	0.01	0.73	$\Delta E^*_{CIELAB} = 6.6$
13	82.59	11.66	-3.39	84.73	8.66	-3.45	2.14	-2.99	-0.05	3.68	Mean CIELAB difference (5 steps)
14	85.86	7.07	-3.48	88.54	3.3	-3.56	2.68	-3.76	-0.07	4.63	$\Delta L^*_{CIELAB} = 4.6$
15	89.12	2.49	-3.58	91.61	-0.99	-3.66	2.48	-3.48	-0.06	4.28	Mean colour reproduction index: $R^*_{ab,m} = 72$
16	92.39	-2.09	-3.68	92.39	-2.09	-3.68	0.0	0.0	0.0	0.01	
17	43.4	66.68	-2.21	43.4	66.68	-2.21	0.0	0.0	0.0	0.01	
18	55.65	49.49	-2.58	49.24	58.48	-2.39	-6.4	9.0	0.19	11.05	
19	67.9	32.29	-2.95	61.13	41.78	-2.74	-6.75	9.49	0.2	11.65	
20	80.14	15.1	-3.31	80.36	14.79	-3.32	0.21	-0.29	0.0	0.37	
21	92.39	-2.09	-3.68	92.39	-2.09	-3.68	0.0	0.0	0.0	0.01	

Device: (O); Meas.: O41E00NA.PS; Date: 180701

www.ps.bam.de/DE14/100/O41E00NA.PS

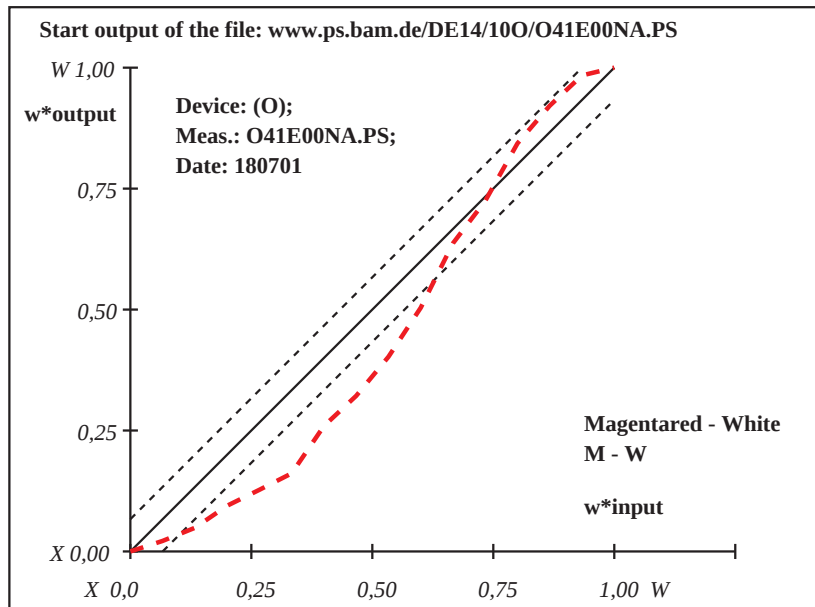


Device: (O); Meas.: O41E00NA.PS; Date: 180701

www.ps.bam.de/DE14/100/O41E00NA.PS

i	LAB*ref			LAB*out, relative			LAB*out/c-ref			ΔE^*	Linearized output S2 Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G relative CIELAB data used for "out"
1	42.67	66.68	-0.49	42.67	66.68	-0.49	0.0	0.0	0.0	0.01	
2	45.96	62.04	-0.72	45.82	62.24	-0.71	-0.13	0.2	0.01	0.24	
3	49.25	57.41	-0.94	49.64	56.85	-0.97	0.4	-0.55	-0.02	0.69	
4	52.54	52.77	-1.17	53.6	51.27	-1.24	1.06	-1.49	-0.06	1.84	$\Delta L^* = 92.0 - 42.67$
5	55.82	48.13	-1.4	56.77	46.8	-1.46	0.94	-1.32	-0.06	1.63	Regularity
6	59.11	43.5	-1.62	60.11	42.09	-1.69	1.0	-1.4	-0.06	1.73	$g^* = 88.4$
7	62.4	38.86	-1.85	63.32	37.57	-1.91	0.91	-1.28	-0.05	1.58	Lightness gamut rel. to offset
8	65.69	34.22	-2.08	66.65	32.87	-2.14	0.96	-1.34	-0.06	1.66	$f^* = 63.7$
9	68.98	29.59	-2.3	69.61	28.7	-2.35	0.63	-0.88	-0.03	1.09	ΔL^* -gray variation
10	72.27	24.95	-2.53	71.78	25.64	-2.5	-0.48	0.69	0.03	0.84	$v^* = 0.0$
11	75.56	20.31	-2.76	75.9	19.83	-2.78	0.35	-0.48	-0.01	0.6	Mean CIELAB difference (16 steps)
12	78.85	15.68	-2.98	79.37	14.94	-3.02	0.52	-0.72	-0.03	0.9	$\Delta E^*_{CIELAB} = 1.0$
13	82.13	11.04	-3.21	82.88	9.99	-3.26	0.74	-1.04	-0.04	1.29	Mean CIELAB difference (5 steps)
14	85.42	6.4	-3.44	85.92	5.7	-3.47	0.5	-0.69	-0.02	0.86	$\Delta L^*_{CIELAB} = 0.8$
15	88.71	1.77	-3.66	89.2	1.08	-3.7	0.48	-0.67	-0.02	0.84	Mean colour reproduction index: $R^*_{ab,m} = 96$
16	92.0	-2.86	-3.89	92.0	-2.86	-3.89	0.0	0.0	0.0	0.01	
17	42.67	66.68	-0.49	42.67	66.68	-0.49	0.0	0.0	0.0	0.01	
18	55.0	49.29	-1.34	55.98	47.92	-1.41	0.97	-1.36	-0.06	1.68	
19	67.34	31.91	-2.19	68.13	30.79	-2.24	0.79	-1.11	-0.04	1.37	
20	79.67	14.52	-3.04	80.24	13.71	-3.08	0.58	-0.8	-0.03	1.0	
21	92.0	-2.86	-3.89	92.0	-2.86	-3.89	0.0	0.0	0.0	0.01	

Device: (O); Meas.: O41E00FA.PS; Date: 180701

www.ps.bam.de/DE14/100/O41E00FA.PS

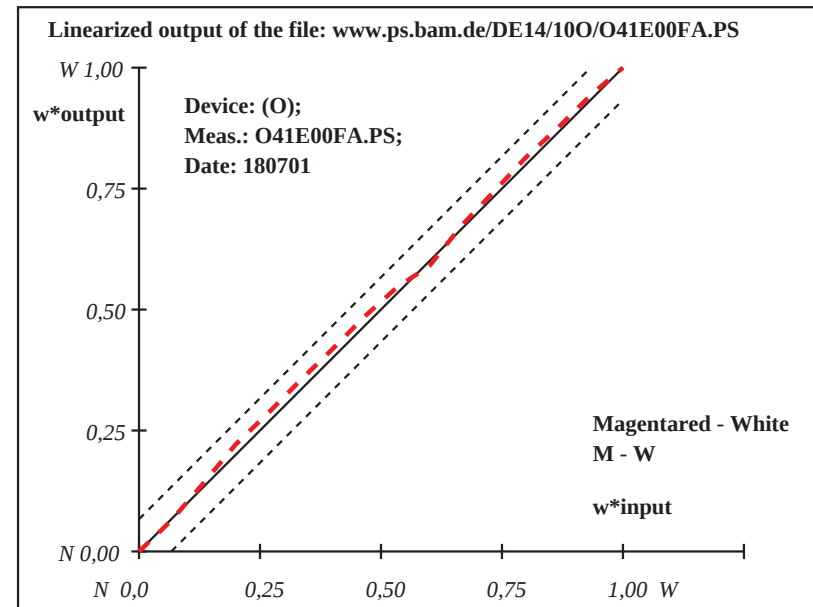

Device: (O); Meas.: O41E00FA.PS; Date: 180701

www.ps.bam.de/DE14/100/O41E00FA.PS


Output linearization of 16 colour steps according to ISO/IEC 15775; PS operator cmyn* setcmykcolor

i	LAB*ref	LAB*out, relative	LAB*out/c-ref	ΔE^*
1	87.31 -19.95 95.2	87.31 -19.95 95.2	0.0 0.0 0.0	0.01
2	87.67 -18.78 88.61	87.5 -19.33 91.74	-0.16 -0.55 3.13	3.18
3	88.03 -17.61 82.03	87.7 -18.69 88.1	-0.32 -1.07 6.07	6.18
4	88.39 -16.44 75.44	87.84 -18.23 85.54	-0.54 -1.79 10.1	10.28
5	88.76 -15.26 68.86	88.15 -17.24 79.96	-0.6 -1.96 11.1	11.29
6	89.12 -14.09 62.27	88.42 -16.35 74.95	-0.69 -2.24 12.68	12.89
7	89.48 -12.92 55.68	89.07 -14.23 63.06	-0.39 -1.3 7.37	7.5
8	89.84 -11.75 49.1	89.64 -12.39 52.7	-0.19 -0.63 3.6	3.66
9	90.2 -10.58 42.51	89.95 -11.38 46.99	-0.24 -0.79 4.48	4.56
10	90.56 -9.41 35.93	90.48 -9.66 37.34	-0.07 -0.24 1.42	1.44
11	90.92 -8.24 29.34	90.87 -8.4 30.24	-0.04 -0.15 0.9	0.92
12	91.28 -7.07 22.75	91.41 -6.65 20.4	0.13 0.42 -2.35	2.4
13	91.65 -5.89 16.17	91.82 -5.33 12.97	0.18 0.57 -3.19	3.25
14	92.01 -4.72 9.58	92.23 -4.0 5.54	0.22 0.72 -4.04	4.12
15	92.37 -3.55 3.0	92.52 -3.05 0.18	0.15 0.5 -2.8	2.86
16	92.73 -2.38 -3.58	92.73 -2.38 -3.58	0.0 0.0 0.0	0.01
17	87.31 -19.95 95.2	87.31 -19.95 95.2	0.0 0.0 0.0	0.01
18	88.67 -15.56 70.5	88.07 -17.49 81.36	-0.59 -1.92 10.85	11.04
19	90.02 -11.16 45.81	89.8 -11.88 49.84	-0.21 -0.71 4.04	4.11
20	91.38 -6.77 21.11	91.52 -6.32 18.54	0.14 0.46 -2.56	2.61
21	92.73 -2.38 -3.58	92.73 -2.38 -3.58	0.0 0.0 0.0	0.01

Start output S1
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 92.73 - 87.31$
Regularity
 $g^* = 43.9$
Lightness gamut rel. to offset
 $f^* = 7.0$
 ΔL^* -gray variation
 $v^* = 0.0$
Mean CIELAB difference (16 steps)
 $\Delta E^*_{CIELAB} = 4.7$
Mean CIELAB difference (5 steps)
 $\Delta L^*_{CIELAB} = 3.6$
Mean colour reproduction index: $R^*_{ab,m} = 80$

Device: (O); Meas.: O41E00NA.PS; Date: 180701

www.ps.bam.de/DE14/100/O41E00NA.PS

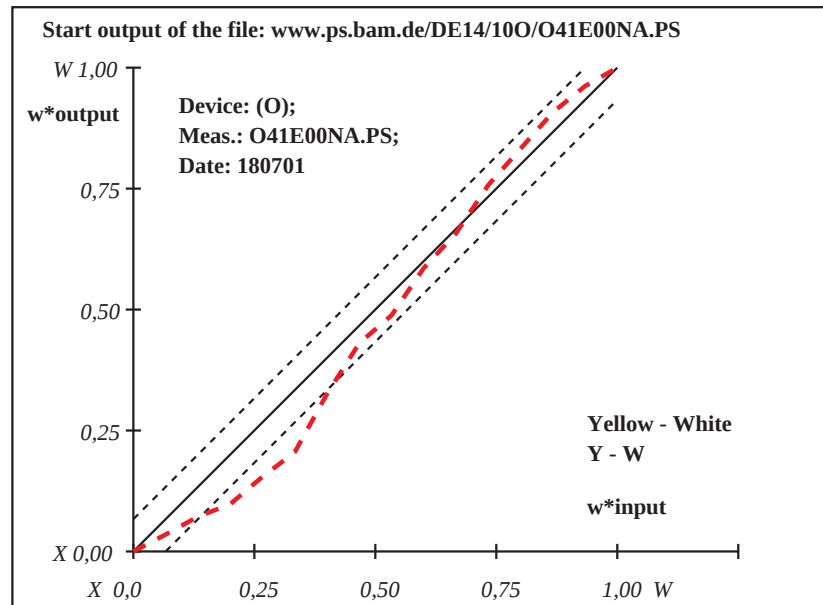

Device: (O); Meas.: O41E00NA.PS; Date: 180701


www.ps.bam.de/DE14/100/O41E00NA.PS

i	LAB*ref	LAB*out, relative	LAB*out/c-ref	ΔE^*
1	87.18 -20.03 94.45	87.18 -20.03 94.45	0.0 0.0 0.0	0.01
2	87.51 -18.85 87.88	87.44 -19.09 89.18	-0.05 -0.22 1.3	1.32
3	87.83 -17.68 81.3	87.69 -18.19 84.17	-0.13 -0.5 2.87	2.91
4	88.16 -16.5 74.73	88.03 -16.95 77.25	-0.12 -0.44 2.52	2.57
5	88.49 -15.33 68.15	88.38 -15.73 70.4	-0.1 -0.39 2.25	2.28
6	88.81 -14.15 61.58	88.47 -15.38 68.46	-0.33 -1.22 6.88	7.0
7	89.14 -12.97 55.01	88.92 -13.78 59.51	-0.21 -0.8 4.5	4.58
8	89.47 -11.8 48.43	89.38 -12.12 50.23	-0.08 -0.31 1.8	1.83
9	89.79 -10.62 41.86	89.64 -11.19 45.04	-0.15 -0.56 3.18	3.23
10	90.12 -9.45 35.28	89.98 -9.95 38.1	-0.13 -0.49 2.82	2.87
11	90.45 -8.27 28.71	90.4 -8.42 29.57	-0.03 -0.14 0.86	0.88
12	90.77 -7.09 22.14	90.8 -6.99 21.58	0.03 0.1 -0.55	0.57
13	91.1 -5.92 15.56	91.11 -5.87 15.32	0.01 0.04 -0.23	0.25
14	91.43 -4.74 8.99	91.38 -4.92 10.0	-0.04 -0.17 1.01	1.03
15	91.75 -3.57 2.41	91.73 -3.66 2.93	-0.02 -0.08 0.52	0.53
16	92.08 -2.39 -4.15	92.08 -2.39 -4.15	0.0 0.0 0.0	0.01
17	87.18 -20.03 94.45	87.18 -20.03 94.45	0.0 0.0 0.0	0.01
18	88.41 -15.62 69.8	88.29 -16.03 72.11	-0.11 -0.4 2.31	2.35
19	89.63 -11.21 45.14	89.51 -11.66 47.63	-0.11 -0.44 2.49	2.53
20	90.86 -6.8 20.49	90.88 -6.71 20.01	0.02 0.09 -0.47	0.49
21	92.08 -2.39 -4.15	92.08 -2.39 -4.15	0.0 0.0 0.0	0.01

Linearized output S2
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 92.08 - 87.18$
Regularity
 $g^* = 80.9$
Lightness gamut rel. to offset
 $f^* = 6.3$
 ΔL^* -gray variation
 $v^* = 0.0$
Mean CIELAB difference (16 steps)
 $\Delta E^*_{CIELAB} = 2.0$
Mean CIELAB difference (5 steps)
 $\Delta L^*_{CIELAB} = 1.1$
Mean colour reproduction index: $R^*_{ab,m} = 92$

Device: (O); Meas.: O41E00FA.PS; Date: 180701

www.ps.bam.de/DE14/100/O41E00FA.PS

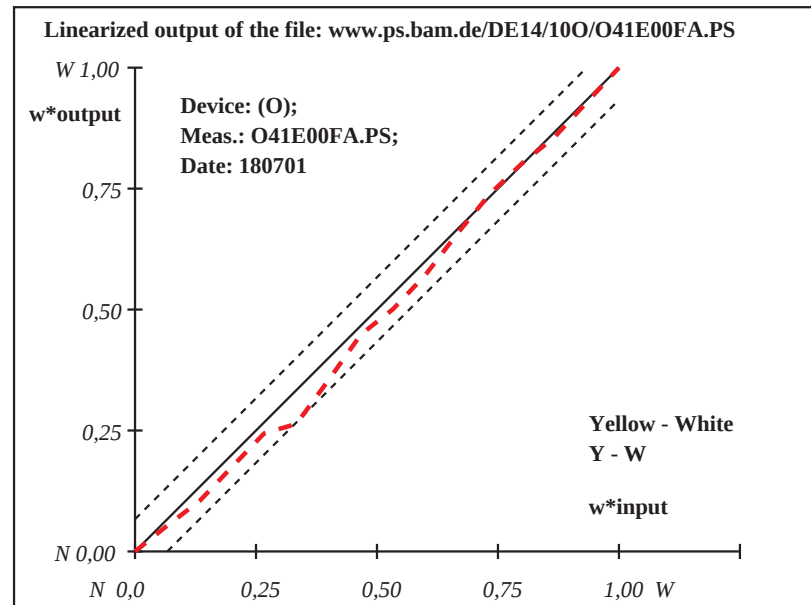

Device: (O); Meas.: O41E00FA.PS; Date: 180701


www.ps.bam.de/DE14/100/O41E00FA.PS

i	LAB*ref	LAB*out, relative	LAB*out/c-ref	ΔE^*
1	29.48 -0.59 -0.35	29.48 -0.59 -0.35	0.0 0.0 0.0	0.01
2	33.7 -0.69 -0.56	30.34 -0.61 -0.39	-3.35 0.08 0.17	3.36
3	37.91 -0.79 -0.77	31.63 -0.64 -0.46	-6.27 0.15 0.31	6.29
4	42.13 -0.88 -0.98	35.78 -0.74 -0.66	-6.34 0.15 0.32	6.36
5	46.34 -0.98 -1.19	39.57 -0.82 -0.85	-6.76 0.16 0.34	6.78
6	50.56 -1.08 -1.4	44.14 -0.93 -1.08	-6.41 0.15 0.32	6.43
7	54.77 -1.18 -1.61	52.67 -1.13 -1.51	-2.09 0.05 0.1	2.1
8	58.99 -1.28 -1.82	56.31 -1.21 -1.69	-2.67 0.06 0.13	2.68
9	63.2 -1.37 -2.04	62.01 -1.35 -1.98	-1.19 0.03 0.06	1.2
10	67.42 -1.47 -2.25	68.05 -1.49 -2.28	0.63 0.0 -0.02	0.64
11	71.63 -1.57 -2.46	73.56 -1.61 -2.55	1.93 -0.03 -0.09	1.93
12	75.85 -1.67 -2.67	78.45 -1.73 -2.8	2.6 -0.05 -0.12	2.6
13	80.06 -1.77 -2.88	83.03 -1.84 -3.03	2.97 -0.06 -0.14	2.98
14	84.28 -1.86 -3.09	87.0 -1.93 -3.22	2.72 -0.05 -0.13	2.72
15	88.49 -1.96 -3.3	90.52 -2.01 -3.4	2.03 -0.04 -0.09	2.03
16	92.71 -2.06 -3.51	92.71 -2.06 -3.51	0.0 0.0 0.0	0.01
17	29.48 -0.59 -0.35	29.48 -0.59 -0.35	0.0 0.0 0.0	0.01
18	45.29 -0.96 -1.14	38.62 -0.8 -0.81	-6.66 0.15 0.33	6.68
19	61.1 -1.33 -1.93	59.16 -1.28 -1.83	-1.93 0.05 0.1	1.94
20	76.9 -1.69 -2.72	79.59 -1.76 -2.85	2.69 -0.05 -0.12	2.7
21	92.71 -2.06 -3.51	92.71 -2.06 -3.51	0.0 0.0 0.0	0.01

Start output S1
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 92.71 - 29.48$
Regularity
 $g^* = 44.5$
Lightness gamut rel. to offset
 $f^* = 81.7$
 ΔL^* -gray variation
 $v^* = 0.0$
Mean CIELAB difference (16 steps)
 $\Delta E^*_{CIELAB} = 3.0$
Mean CIELAB difference (5 steps)
 $\Delta L^*_{CIELAB} = 2.3$
Mean colour reproduction index: $R^*_{ab,m} = 87$

Device: (O); Meas.: O41E00NA.PS; Date: 180701

www.ps.bam.de/DE14/100/O41E00NA.PS

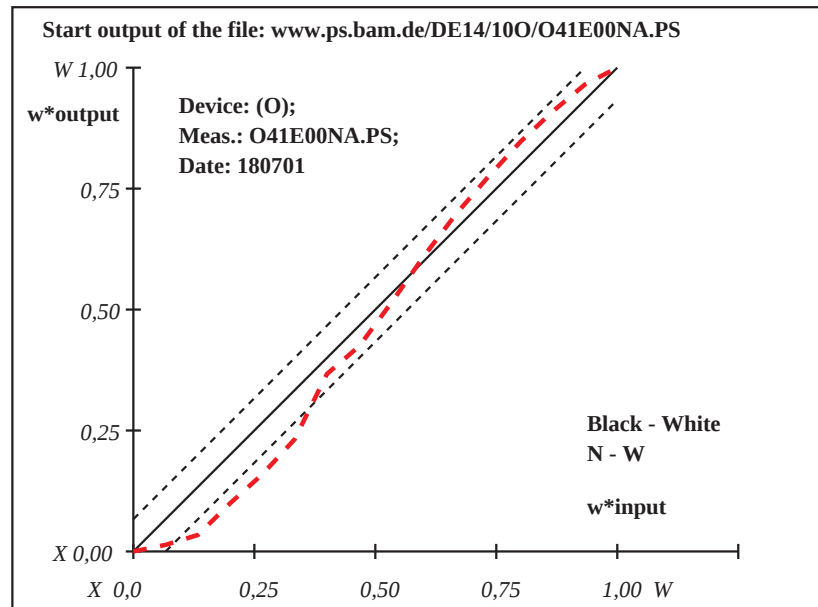

Device: (O); Meas.: O41E00NA.PS; Date: 180701


www.ps.bam.de/DE14/100/O41E00NA.PS

i	LAB*ref	LAB*out, relative	LAB*out/c-ref	ΔE^*
1	29.97 -0.71 0.07	29.97 -0.71 0.07	0.0 0.0 0.0	0.01
2	34.12 -0.84 -0.19	35.78 -0.89 -0.3	1.66 -0.04 -0.1	1.66
3	38.27 -0.97 -0.46	39.17 -0.99 -0.52	0.9 -0.02 -0.05	0.9
4	42.42 -1.09 -0.73	44.18 -1.15 -0.84	1.76 -0.04 -0.1	1.76
5	46.57 -1.22 -0.99	48.74 -1.29 -1.13	2.17 -0.06 -0.13	2.17
6	50.72 -1.35 -1.26	51.08 -1.36 -1.29	0.36 0.0 -0.01	0.36
7	54.87 -1.48 -1.53	57.58 -1.56 -1.71	2.71 -0.07 -0.17	2.71
8	59.02 -1.61 -1.8	61.38 -1.68 -1.95	2.36 -0.06 -0.14	2.36
9	63.17 -1.73 -2.07	65.12 -1.79 -2.2	1.95 -0.05 -0.12	1.96
10	67.32 -1.86 -2.34	68.46 -1.9 -2.41	1.14 -0.03 -0.06	1.14
11	71.47 -1.99 -2.61	73.02 -2.04 -2.71	1.55 -0.04 -0.09	1.56
12	75.62 -2.12 -2.88	76.25 -2.14 -2.92	0.63 -0.01 -0.03	0.64
13	79.77 -2.25 -3.14	80.99 -2.28 -3.22	1.22 -0.03 -0.07	1.22
14	83.92 -2.37 -3.41	84.54 -2.39 -3.45	0.62 -0.01 -0.03	0.63
15	88.07 -2.5 -3.68	88.67 -2.52 -3.72	0.6 -0.01 -0.03	0.6
16	92.22 -2.63 -3.95	92.22 -2.63 -3.95	0.0 0.0 0.0	0.01
17	29.97 -0.71 0.07	29.97 -0.71 0.07	0.0 0.0 0.0	0.01
18	45.53 -1.19 -0.93	47.6 -1.25 -1.06	2.06 -0.05 -0.12	2.07
19	61.1 -1.67 -1.94	63.25 -1.74 -2.07	2.15 -0.06 -0.13	2.16
20	76.66 -2.15 -2.94	77.44 -2.17 -2.99	0.78 -0.01 -0.04	0.78
21	92.22 -2.63 -3.95	92.22 -2.63 -3.95	0.0 0.0 0.0	0.01

Linearized output S2
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 92.22 - 29.97$
Regularity
 $g^* = 80.5$
Lightness gamut rel. to offset
 $f^* = 80.4$
 ΔL^* -gray variation
 $v^* = 0.0$
Mean CIELAB difference (16 steps)
 $\Delta E^*_{CIELAB} = 1.2$
Mean CIELAB difference (5 steps)
 $\Delta L^*_{CIELAB} = 1.0$
Mean colour reproduction index: $R^*_{ab,m} = 95$

Device: (O); Meas.: O41E00FA.PS; Date: 180701

www.ps.bam.de/DE14/100/O41E00FA.PS

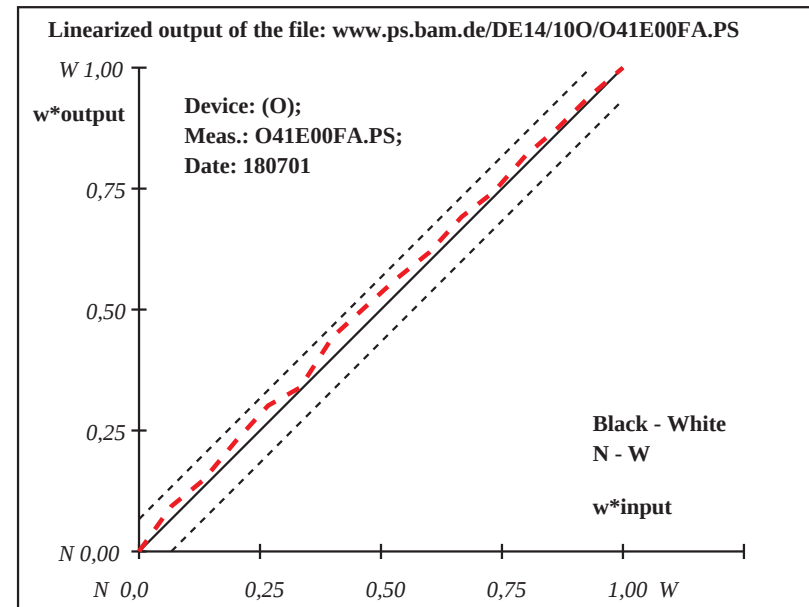


Device: (O); Meas.: O41E00FA.PS; Date: 180701

www.ps.bam.de/DE14/100/O41E00FA.PS

i	LAB*ref			LAB*out, relative			LAB*out/c-ref			ΔE^*	Start output S1 Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G relative CIELAB data used for "out" $\Delta L^* = 92.63 - 43.78$ Regularity $g^* = 14.4$ Lightness gamut rel. to offset $f^* = 63.1$ ΔL^*-gray variation $v^* = 0.0$ Mean CIELAB difference (16 steps) $\Delta E^{*}_{CIELAB} = 8.2$ Mean CIELAB difference (5 steps) $\Delta L^{*}_{CIELAB} = 6.1$ Mean colour reproduction index: $R^*_{ab,m} = 64$
1	43.78	54.73	30.52	43.78	54.73	30.52	0.0	0.0	0.0	0.01	
2	47.04	50.97	28.22	44.53	53.86	29.99	-2.5	2.9	1.77	4.22	
3	50.29	47.2	25.92	44.17	54.28	30.24	-6.11	7.07	4.32	10.3	
4	53.55	43.44	23.62	45.73	52.48	29.14	-7.81	9.04	5.53	13.17	
5	56.81	39.68	21.31	47.19	50.79	28.11	-9.61	11.11	6.8	16.19	
6	60.06	35.91	19.01	49.6	48.01	26.41	-10.46	12.1	7.4	17.62	Mean CIELAB difference (16 steps) $\Delta E^{*}_{CIELAB} = 8.2$ Mean CIELAB difference (5 steps) $\Delta L^{*}_{CIELAB} = 6.1$ Mean colour reproduction index: $R^*_{ab,m} = 64$
7	63.32	32.15	16.71	53.95	42.98	23.33	-9.36	10.83	6.62	15.78	
8	66.58	28.39	14.41	57.57	38.79	20.77	-9.0	10.41	6.36	15.16	
9	69.83	24.62	12.11	62.91	32.62	17.0	-6.91	8.0	4.89	11.65	
10	73.09	20.86	9.81	67.46	27.37	13.79	-5.62	6.51	3.98	9.49	
11	76.35	17.1	7.51	75.05	18.6	8.42	-1.29	1.5	0.92	2.18	
12	79.6	13.33	5.21	79.96	12.92	4.95	0.36	-0.4	-0.24	0.6	
13	82.86	9.57	2.9	85.59	6.41	0.97	2.73	-3.15	-1.92	4.6	
14	86.12	5.81	0.6	89.98	1.34	-2.12	3.86	-4.45	-2.72	6.5	
15	89.37	2.04	-1.69	91.94	-0.92	-3.5	2.57	-2.96	-1.81	4.33	
16	92.63	-1.71	-3.99	92.63	-1.71	-3.99	0.0	0.0	0.0	0.01	
17	43.78	54.73	30.52	43.78	54.73	30.52	0.0	0.0	0.0	0.01	Mean CIELAB difference (16 steps) $\Delta E^{*}_{CIELAB} = 8.2$ Mean CIELAB difference (5 steps) $\Delta L^{*}_{CIELAB} = 6.1$ Mean colour reproduction index: $R^*_{ab,m} = 64$
18	55.99	40.62	21.89	46.83	51.21	28.37	-9.16	10.59	6.48	15.43	
19	68.21	26.51	13.26	60.24	35.71	18.89	-7.95	9.2	5.63	13.41	
20	80.42	12.39	4.63	81.37	11.29	3.96	0.95	-1.09	-0.66	1.6	
21	92.63	-1.71	-3.99	92.63	-1.71	-3.99	0.0	0.0	0.0	0.01	

Device: (O); Meas.: O41E00NA.PS; Date: 180701

www.ps.bam.de/DE14/100/O41E00NA.PS

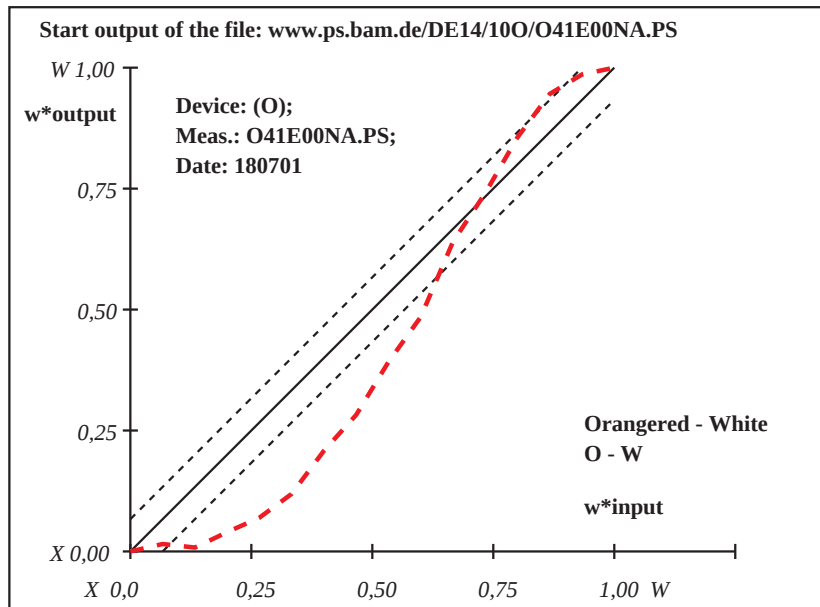


Device: (O); Meas.: O41E00NA.PS; Date: 180701

www.ps.bam.de/DE14/100/O41E00NA.PS

i	LAB*ref			LAB*out, relative			LAB*out/c-ref			ΔE^*	Linearized output S2 Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G relative CIELAB data used for "out" $\Delta L^* = 92.3 - 43.56$ Regularity $g^* = 90.3$ Lightness gamut rel. to offset $f^* = 63.0$ ΔL^*-gray variation $v^* = 0.0$ Mean CIELAB difference (16 steps) $\Delta E^{*}_{CIELAB} = 0.8$ Mean CIELAB difference (5 steps) $\Delta L^{*}_{CIELAB} = 0.4$ Mean colour reproduction index: $R^*_{ab,m} = 97$
1	43.56	53.87	29.95	43.56	53.87	29.95	0.0	0.0	0.0	0.01	
2	46.81	50.12	27.67	46.97	49.93	27.56	0.16	-0.18	-0.11	0.28	
3	50.06	46.37	25.39	50.32	46.07	25.21	0.26	-0.3	-0.18	0.44	
4	53.31	42.62	23.12	53.19	42.76	23.2	-0.1	0.13	0.08	0.19	
5	56.56	38.88	20.84	56.1	39.4	21.16	-0.44	0.52	0.32	0.76	Mean CIELAB difference (16 steps) $\Delta E^{*}_{CIELAB} = 0.8$ Mean CIELAB difference (5 steps) $\Delta L^{*}_{CIELAB} = 0.4$ Mean colour reproduction index: $R^*_{ab,m} = 97$
6	59.81	35.13	18.56	60.95	33.81	17.76	1.14	-1.31	-0.79	1.92	
7	63.06	31.38	16.28	62.72	31.77	16.52	-0.33	0.39	0.24	0.56	
8	66.31	27.63	14.0	66.24	27.7	14.05	-0.05	0.07	0.04	0.1	
9	69.55	23.88	11.73	68.39	25.22	12.54	-1.15	1.34	0.81	1.95	
10	72.8	20.13	9.45	71.52	21.62	10.35	-1.28	1.48	0.9	2.16	
11	76.05	16.38	7.17	75.69	16.8	7.42	-0.35	0.42	0.25	0.61	
12	79.3	12.63	4.89	79.45	12.47	4.79	0.14	-0.16	-0.09	0.24	
13	82.55	8.89	2.61	83.3	8.03	2.09	0.75	-0.85	-0.51	1.25	
14	85.8	5.14	0.34	85.97	4.94	0.22	0.17	-0.18	-0.11	0.28	
15	89.05	1.39	-1.93	89.93	0.37	-2.55	0.88	-1.01	-0.61	1.48	
16	92.3	-2.35	-4.21	92.3	-2.35	-4.21	0.0	0.0	0.0	0.01	
17	43.56	53.87	29.95	43.56	53.87	29.95	0.0	0.0	0.0	0.01	Mean CIELAB difference (16 steps) $\Delta E^{*}_{CIELAB} = 0.8$ Mean CIELAB difference (5 steps) $\Delta L^{*}_{CIELAB} = 0.4$ Mean colour reproduction index: $R^*_{ab,m} = 97$
18	55.75	39.81	21.41	55.38	40.24	21.67	-0.36	0.42	0.26	0.62	
19	67.93	25.76	12.87	67.32	26.46	13.29	-0.6	0.7	0.43	1.03	
20	80.12	11.7	4.32	80.41	11.36	4.12	0.29	-0.33	-0.2	0.5	
21	92.3	-2.35	-4.21	92.3	-2.35	-4.21	0.0	0.0	0.0	0.01	

Device: (O); Meas.: O41E00FA.PS; Date: 180701

www.ps.bam.de/DE14/100/O41E00FA.PS

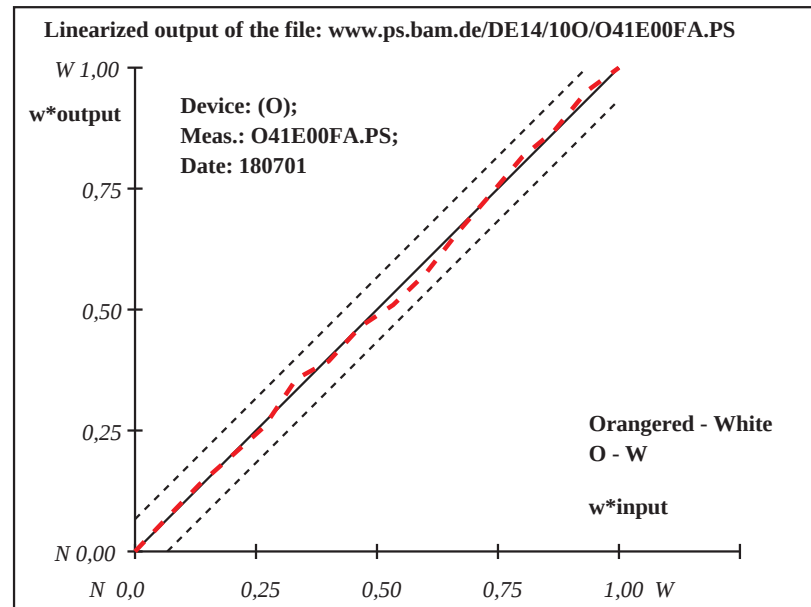

Device: (O); Meas.: O41E00FA.PS; Date: 180701


www.ps.bam.de/DE14/100/O41E00FA.PS

i	LAB*ref	LAB*out, relative	LAB*out/c-ref	ΔE^*
1	43.22 -62.35 27.1	43.22 -62.35 27.1	0.0 0.0 0.0	0.01
2	46.52 -58.32 25.05	44.54 -60.75 26.28	-1.97 -2.41 1.23	3.36
3	49.82 -54.3 23.01	46.01 -58.95 25.37	-3.8 -4.64 2.37	6.47
4	53.12 -50.27 20.96	48.18 -56.3 24.02	-4.93 -6.01 3.06	8.37
5	56.42 -46.25 18.92	49.86 -54.25 22.98	-6.55 -7.99 4.06	11.11
6	59.72 -42.22 16.87	53.76 -49.5 20.57	-5.95 -7.26 3.7	10.11
7	63.02 -38.2 14.82	58.7 -43.47 17.5	-4.31 -5.26 2.68	7.33
8	66.32 -34.17 12.78	63.3 -37.86 14.65	-3.01 -3.68 1.87	5.12
9	69.62 -30.15 10.73	65.31 -35.41 13.41	-4.3 -5.25 2.68	7.31
10	72.92 -26.12 8.69	69.03 -30.87 11.1	-3.88 -4.74 2.41	6.59
11	76.22 -22.1 6.64	72.82 -26.24 8.75	-3.39 -4.14 2.11	5.76
12	79.52 -18.07 4.59	77.12 -21.0 6.08	-2.39 -2.92 1.49	4.07
13	82.82 -14.05 2.55	81.91 -15.16 3.11	-0.9 -1.1 0.57	1.55
14	86.12 -10.02 0.5	85.97 -10.2 0.59	-0.14 -0.17 0.09	0.25
15	89.42 -6.0 -1.53	89.78 -5.55 -1.76	0.36 0.44 -0.21	0.61
16	92.72 -1.97 -3.58	92.72 -1.97 -3.58	0.0 0.0 0.0	0.01
17	43.22 -62.35 27.1	43.22 -62.35 27.1	0.0 0.0 0.0	0.01
18	55.6 -47.26 19.43	49.44 -54.76 23.24	-6.14 -7.49 3.81	10.43
19	67.97 -32.16 11.76	64.3 -36.63 14.03	-3.66 -4.46 2.27	6.22
20	80.35 -17.07 4.08	78.32 -19.54 5.34	-2.02 -2.46 1.26	3.44
21	92.72 -1.97 -3.58	92.72 -1.97 -3.58	0.0 0.0 0.0	0.01
Mean colour reproduction index: $R^*_{ab,m} = 79$				

Start output S1
Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 92.72 - 43.22$
Regularity
 $g^* = 41.9$
Lightness gamut rel. to offset
 $f^* = 64.0$
 ΔL^* -gray variation
 $v^* = 0.0$
Mean CIELAB difference (16 steps)
 $\Delta E^*_{CIELAB} = 4.9$
Mean CIELAB difference (5 steps)
 $\Delta L^*_{CIELAB} = 4.0$

Device: (O); Meas.: O41E00NA.PS; Date: 180701

www.ps.bam.de/DE14/100/O41E00NA.PS

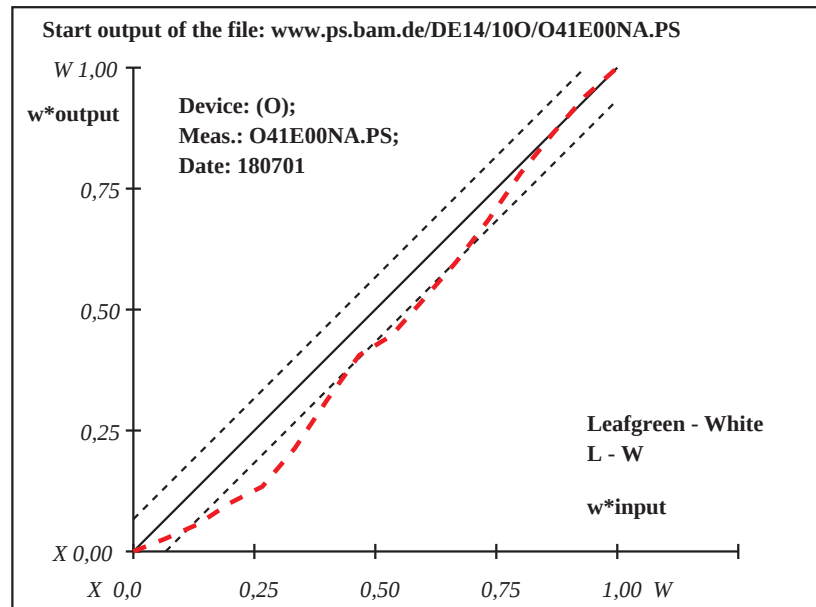

Device: (O); Meas.: O41E00NA.PS; Date: 180701


www.ps.bam.de/DE14/100/O41E00NA.PS

i	LAB*ref	LAB*out, relative	LAB*out/c-ref	ΔE^*
1	43.38 -62.0 27.8	43.38 -62.0 27.8	0.0 0.0 0.0	0.01
2	46.62 -57.99 25.65	46.42 -58.25 25.79	-0.19 -0.24 0.13	0.35
3	49.87 -53.99 23.51	50.13 -53.67 23.34	0.26 0.32 -0.16	0.44
4	53.11 -49.98 21.36	53.5 -49.5 21.1	0.39 0.48 -0.25	0.67
5	56.36 -45.98 19.21	55.05 -47.59 20.08	-1.29 -1.6 0.86	2.24
6	59.6 -41.97 17.07	56.77 -45.46 18.94	-2.82 -3.48 1.87	4.86
7	62.84 -37.97 14.92	59.72 -41.82 16.99	-3.11 -3.84 2.07	5.37
8	66.09 -33.96 12.77	65.14 -35.13 13.4	-0.94 -1.16 0.63	1.63
9	69.33 -29.96 10.63	67.93 -31.69 11.56	-1.4 -1.73 0.93	2.42
10	72.58 -25.95 8.48	71.32 -27.5 9.31	-1.24 -1.54 0.83	2.16
11	75.82 -21.95 6.33	75.46 -22.39 6.57	-0.35 -0.43 0.24	0.62
12	79.06 -17.94 4.19	79.16 -17.82 4.12	0.09 0.12 -0.05	0.16
13	82.31 -13.94 2.04	81.45 -15.0 2.61	-0.85 -1.05 0.57	1.48
14	85.55 -9.93 -0.1	84.8 -10.86 0.39	-0.74 -0.92 0.5	1.3
15	88.8 -5.93 -2.24	88.62 -6.14 -2.13	-0.17 -0.21 0.12	0.3
16	92.04 -1.92 -4.39	92.04 -1.92 -4.39	0.0 0.0 0.0	0.01
17	43.38 -62.0 27.8	43.38 -62.0 27.8	0.0 0.0 0.0	0.01
18	55.55 -46.98 19.75	54.67 -48.07 20.33	-0.87 -1.08 0.58	1.51
19	67.71 -31.96 11.7	66.53 -33.41 12.48	-1.17 -1.44 0.78	2.02
20	79.88 -16.94 3.65	79.73 -17.12 3.75	-0.13 -0.17 0.1	0.25
21	92.04 -1.92 -4.39	92.04 -1.92 -4.39	0.0 0.0 0.0	0.01
Mean colour reproduction index: $R^*_{ab,m} = 94$				

Linearized output S2
Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 92.04 - 43.38$
Regularity
 $g^* = 85.5$
Lightness gamut rel. to offset
 $f^* = 62.9$
 ΔL^* -gray variation
 $v^* = 0.0$
Mean CIELAB difference (16 steps)
 $\Delta E^*_{CIELAB} = 1.5$
Mean CIELAB difference (5 steps)
 $\Delta L^*_{CIELAB} = 0.8$

Device: (O); Meas.: O41E00FA.PS; Date: 180701

www.ps.bam.de/DE14/100/O41E00FA.PS

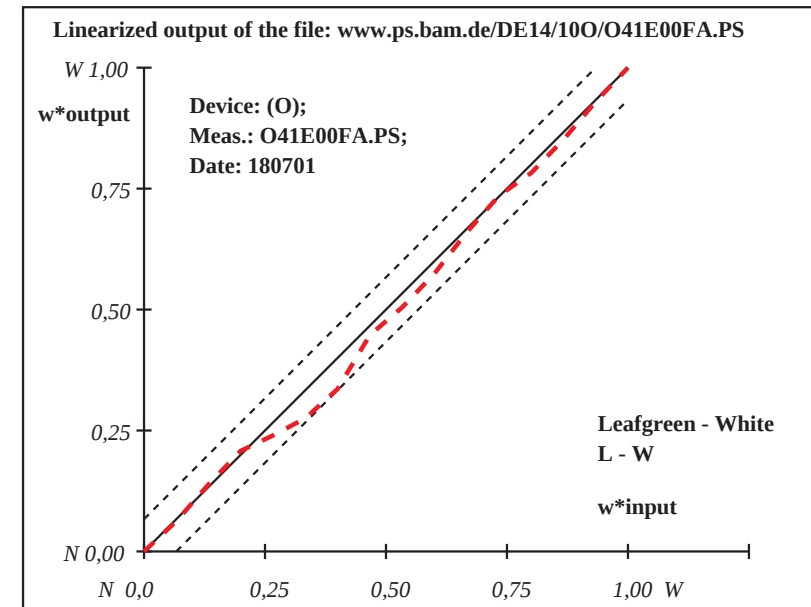

Device: (O); Meas.: O41E00FA.PS; Date: 180701

www.ps.bam.de/DE14/100/O41E00FA.PS


Output linearization of 16 colour steps according to ISO/IEC 15775; PS operator cmyn* setcmykcolor

i	LAB*ref	LAB*out, relative	LAB*out/c-ref	ΔE^*
1	23.79 13.91 -23.61	23.79 13.91 -23.61	0.0 0.0 0.0	0.01
2	28.37 12.87 -22.31	25.03 13.63 -23.26	-3.33 0.76 -0.94	3.55
3	32.95 11.82 -21.02	26.95 13.19 -22.72	-6.0 1.37 -1.69	6.39
4	37.53 10.78 -19.72	29.81 12.54 -21.91	-7.72 1.76 -2.18	8.22
5	42.11 9.74 -18.42	31.11 12.24 -21.54	-11.0 2.51 -3.11	11.71
6	46.69 8.7 -17.12	33.38 11.73 -20.9	-13.31 3.03 -3.76	14.17
7	51.27 7.65 -15.83	39.16 10.41 -19.26	-12.11 2.76 -3.42	12.89
8	55.85 6.61 -14.53	43.05 9.53 -18.16	-12.8 2.92 -3.62	13.63
9	60.44 5.57 -13.23	49.11 8.15 -16.44	-11.32 2.58 -3.2	12.05
10	65.02 4.53 -11.93	53.78 7.08 -15.12	-11.22 2.56 -3.17	11.95
11	69.6 3.48 -10.64	62.01 5.21 -12.78	-7.57 1.73 -2.14	8.07
12	74.18 2.44 -9.34	68.33 3.77 -11.0	-5.84 1.33 -1.65	6.22
13	78.76 1.4 -8.04	76.26 1.97 -8.75	-2.48 0.57 -0.7	2.65
14	83.34 0.36 -6.74	83.99 0.21 -6.56	0.65 -0.14 0.19	0.7
15	87.92 -0.68 -5.45	89.9 -1.13 -4.89	1.98 -0.44 0.56	2.1
16	92.5 -1.72 -4.15	92.5 -1.72 -4.15	0.0 0.0 0.0	0.01
17	23.79 13.91 -23.61	23.79 13.91 -23.61	0.0 0.0 0.0	0.01
18	40.97 10.0 -18.75	30.78 12.32 -21.63	-10.18 2.32 -2.87	10.84
19	58.15 6.09 -13.88	46.08 8.84 -17.3	-12.06 2.75 -3.41	12.84
20	75.32 2.18 -9.01	70.31 3.32 -10.43	-5.0 1.14 -1.41	5.33
21	92.5 -1.72 -4.15	92.5 -1.72 -4.15	0.0 0.0 0.0	0.01

Start output S1
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 92.5 - 23.79$
Regularity
 $g^* = 28.8$
Lightness gamut rel. to offset
 $f^* = 88.8$
 ΔL^* -gray variation
 $v^* = 0.0$
Mean CIELAB difference (16 steps)
 $\Delta E^*_{CIELAB} = 7.1$
Mean CIELAB difference (5 steps)
 $\Delta L^*_{CIELAB} = 5.8$
Mean colour reproduction index: $R^*_{ab,m} = 69$

Device: (O); Meas.: O41E00NA.PS; Date: 180701

www.ps.bam.de/DE14/100/O41E00NA.PS

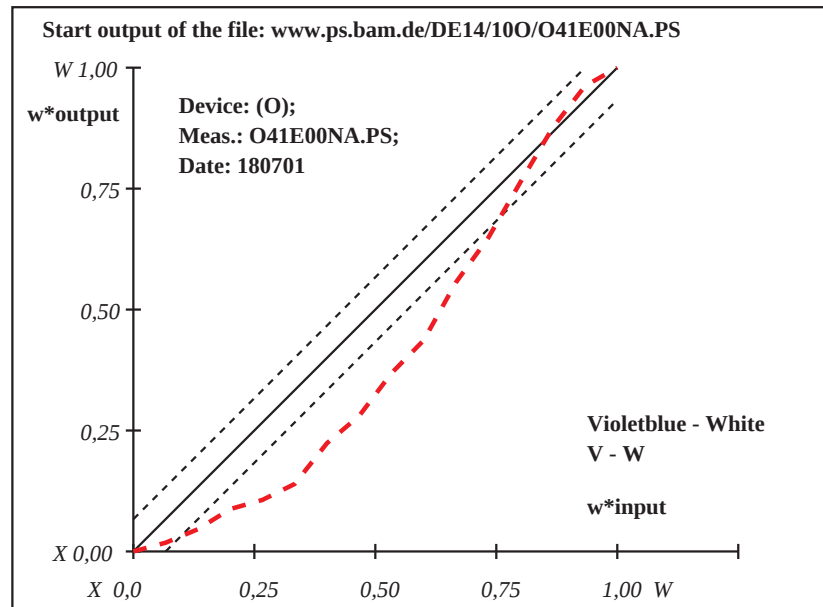

Device: (O); Meas.: O41E00NA.PS; Date: 180701


www.ps.bam.de/DE14/100/O41E00NA.PS

i	LAB*ref	LAB*out, relative	LAB*out/c-ref	ΔE^*
1	24.19 13.52 -21.62	24.19 13.52 -21.62	0.0 0.0 0.0	0.01
2	28.71 12.49 -20.47	28.0 12.65 -20.65	-0.7 0.16 -0.17	0.75
3	33.22 11.47 -19.31	33.64 11.38 -19.21	0.42 -0.08 0.11	0.44
4	37.74 10.44 -18.16	37.4 10.52 -18.25	-0.33 0.08 -0.08	0.36
5	42.26 9.42 -17.01	41.28 9.64 -17.25	-0.96 0.22 -0.24	1.03
6	46.77 8.39 -15.81	46.94 8.35 -15.81	0.17 -0.03 0.04	0.18
7	51.29 7.37 -14.7	51.83 7.25 -14.56	0.54 -0.11 0.14	0.57
8	55.81 6.34 -13.55	56.77 6.12 -13.3	0.97 -0.21 0.25	1.02
9	60.32 5.32 -12.39	59.81 5.43 -12.53	-0.51 0.12 -0.12	0.55
10	64.84 4.29 -11.24	64.23 4.43 -11.4	-0.6 0.14 -0.15	0.64
11	69.36 3.27 -10.09	69.73 3.18 -9.99	0.37 -0.07 0.09	0.39
12	73.87 2.24 -8.93	73.19 2.4 -9.11	-0.67 0.16 -0.16	0.72
13	78.39 1.22 -7.78	79.39 0.99 -7.53	1.0 -0.22 0.25	1.05
14	82.91 0.19 -6.63	83.87 -0.02 -6.38	0.97 -0.21 0.25	1.02
15	87.42 -0.82 -5.47	87.76 -0.9 -5.39	0.34 -0.07 0.09	0.36
16	91.94 -1.85 -4.32	91.94 -1.85 -4.32	0.0 0.0 0.0	0.01
17	24.19 13.52 -21.62	24.19 13.52 -21.62	0.0 0.0 0.0	0.01
18	41.13 9.68 -17.3	40.31 9.86 -17.5	-0.8 0.18 -0.2	0.86
19	58.07 5.83 -12.97	58.29 5.78 -12.91	0.22 -0.04 0.06	0.24
20	75.0 1.99 -8.65	74.74 2.04 -8.71	-0.25 0.06 -0.06	0.28
21	91.94 -1.85 -4.32	91.94 -1.85 -4.32	0.0 0.0 0.0	0.01

Linearized output S2
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 91.94 - 24.19$
Regularity
 $g^* = 89.7$
Lightness gamut rel. to offset
 $f^* = 87.5$
 ΔL^* -gray variation
 $v^* = 0.0$
Mean CIELAB difference (16 steps)
 $\Delta E^*_{CIELAB} = 0.6$
Mean CIELAB difference (5 steps)
 $\Delta L^*_{CIELAB} = 0.3$
Mean colour reproduction index: $R^*_{ab,m} = 98$

Device: (O); Meas.: O41E00FA.PS; Date: 180701

www.ps.bam.de/DE14/100/O41E00FA.PS

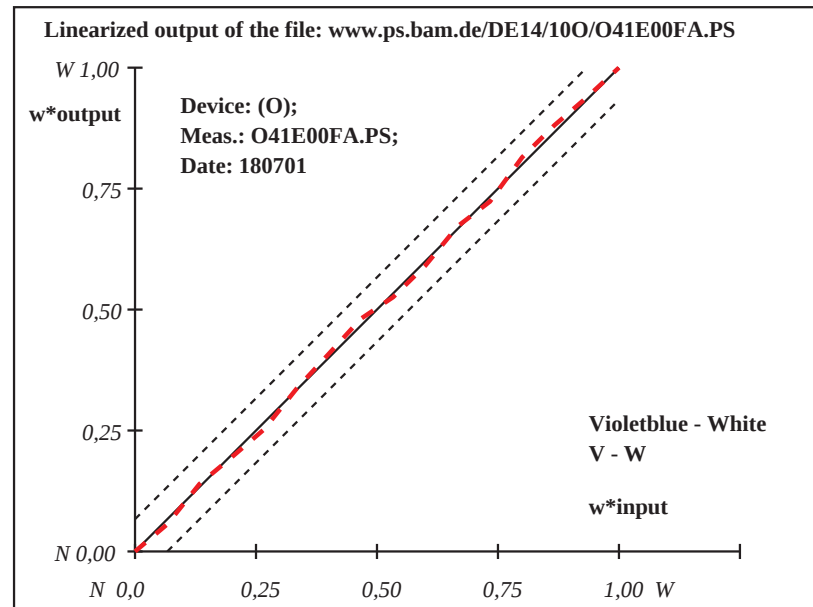


Device: (O); Meas.: O41E00FA.PS; Date: 180701

www.ps.bam.de/DE14/100/O41E00FA.PS

i	LAB*ref			LAB*out, relative			LAB*out/c-ref			ΔE^*	Start output S1 Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G relative CIELAB data used for "out" $\Delta L^* = 92.36 - 28.71$ Regularity $g^* = 19.7$ Lightness gamut rel. to offset $f^* = 82.2$ ΔL^* -gray variation $v^* = 0.0$ Mean CIELAB difference (16 steps) $\Delta E^{*CIELAB} = 7.6$ Mean CIELAB difference (5 steps) $\Delta L^{*CIELAB} = 6.5$ Mean colour reproduction index: $R^*_{ab,m} = 66$
1	28.71	-8.54	7.88	28.71	-8.54	7.88	0.0	0.0	0.0	0.01	
2	32.95	-8.07	7.07	32.04	-8.17	7.24	-0.9	-0.09	0.17	0.93	
3	37.2	-7.59	6.25	32.15	-8.16	7.22	-5.03	-0.55	0.97	5.17	
4	41.44	-7.12	5.44	32.79	-8.09	7.1	-8.64	-0.95	1.66	8.86	
5	45.68	-6.65	4.62	34.01	-7.95	6.86	-11.67	-1.29	2.24	11.96	
6	49.93	-6.18	3.81	36.46	-7.68	6.39	-13.45	-1.49	2.58	13.79	
7	54.17	-5.7	3.0	39.67	-7.32	5.78	-14.49	-1.6	2.78	14.85	
8	58.41	-5.23	2.18	43.78	-6.86	4.99	-14.62	-1.62	2.81	14.99	
9	62.66	-4.76	1.37	47.22	-6.48	4.33	-15.42	-1.71	2.96	15.81	
10	66.9	-4.29	0.55	53.38	-5.79	3.15	-13.51	-1.5	2.59	13.85	
11	71.14	-3.81	-0.25	61.7	-4.87	1.55	-9.43	-1.04	1.81	9.67	
12	75.39	-3.34	-1.06	69.01	-4.05	0.15	-6.37	-0.7	1.22	6.53	
13	79.63	-2.87	-1.88	76.47	-3.22	-1.27	-3.15	-0.34	0.61	3.24	
14	83.87	-2.4	-2.69	83.92	-2.39	-2.7	0.05	0.01	0.0	0.05	
15	88.12	-1.92	-3.51	89.82	-1.73	-3.83	1.7	0.19	-0.32	1.74	
16	92.36	-1.45	-4.32	92.36	-1.45	-4.32	0.0	0.0	0.0	0.01	
17	28.71	-8.54	7.88	28.71	-8.54	7.88	0.0	0.0	0.0	0.01	
18	44.62	-6.77	4.83	33.7	-7.98	6.92	-10.91	-1.21	2.09	11.18	
19	60.54	-5.0	1.78	45.5	-6.67	4.66	-15.02	-1.66	2.88	15.4	
20	76.45	-3.22	-1.27	70.87	-3.84	-0.2	-5.56	-0.61	1.07	5.71	
21	92.36	-1.45	-4.32	92.36	-1.45	-4.32	0.0	0.0	0.0	0.01	

Device: (O); Meas.: O41E00NA.PS; Date: 180701

www.ps.bam.de/DE14/100/O41E00NA.PS

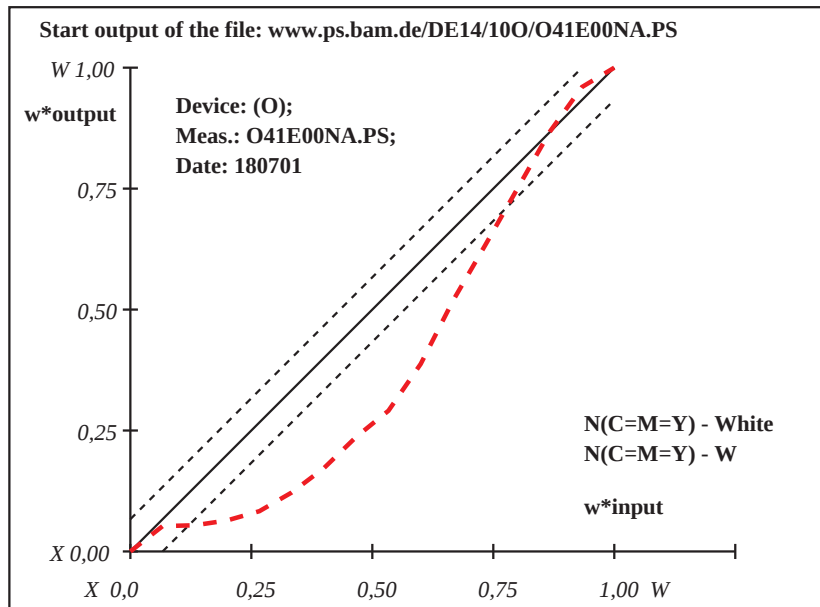


Device: (O); Meas.: O41E00NA.PS; Date: 180701

www.ps.bam.de/DE14/100/O41E00NA.PS

i	LAB*ref			LAB*out, relative			LAB*out/c-ref			ΔE^*	Linearized output S2 Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G relative CIELAB data used for "out" $\Delta L^* = 91.92 - 28.98$ Regularity $g^* = 66.8$ Lightness gamut rel. to offset $f^* = 81.3$ ΔL^* -gray variation $v^* = 0.0$ Mean CIELAB difference (16 steps) $\Delta E^{*CIELAB} = 1.7$ Mean CIELAB difference (5 steps) $\Delta L^{*CIELAB} = 1.4$ Mean colour reproduction index: $R^*_{ab,m} = 92$
1	28.98	-8.21	7.91	28.98	-8.21	7.91	0.0	0.0	0.0	0.01	
2	33.18	-7.77	7.09	32.43	-7.85	7.23	-0.74	-0.07	0.15	0.77	
3	37.37	-7.33	6.26	33.9	-7.69	6.94	-3.47	-0.35	0.68	3.56	
4	41.57	-6.89	5.44	37.29	-7.34	6.28	-4.27	-0.44	0.84	4.39	
5	45.76	-6.45	4.61	41.89	-6.86	5.37	-3.86	-0.4	0.76	3.97	
6	49.96	-6.01	3.79	45.73	-6.45	4.62	-4.22	-0.43	0.83	4.33	
7	54.16	-5.57	2.97	52.18	-5.78	3.35	-1.97	-0.2	0.39	2.03	
8	58.35	-5.13	2.14	56.4	-5.33	2.52	-1.94	-0.19	0.38	2.0	
9	62.55	-4.69	1.32	60.26	-4.93	1.77	-2.28	-0.23	0.45	2.34	
10	66.74	-4.25	0.49	65.34	-4.4	0.77	-1.4	-0.14	0.28	1.44	
11	70.94	-3.81	-0.32	70.24	-3.88	-0.18	-0.69	-0.06	0.14	0.72	
12	75.14	-3.37	-1.14	74.2	-3.47	-0.96	-0.92	-0.09	0.18	0.95	
13	79.33	-2.93	-1.97	79.39	-2.92	-1.98	0.05	0.01	0.0	0.06	
14	83.53	-2.49	-2.79	84.22	-2.42	-2.93	0.69	0.07	-0.13	0.71	
15	87.72	-2.05	-3.62	88.05	-2.02	-3.68	0.32	0.03	-0.05	0.33	
16	91.92	-1.61	-4.44	91.92	-1.61	-4.44	0.0	0.0	0.0	0.01	
17	28.98	-8.21	7.91	28.98	-8.21	7.91	0.0	0.0	0.0	0.01	
18	44.72	-6.56	4.82	40.74	-6.98	5.6	-3.97	-0.41	0.78	4.07	
19	60.45	-4.91	1.73	58.33	-5.13	2.15	-2.11	-0.21	0.42	2.17	
20	76.19	-3.26	-1.35	75.5	-3.33	-1.22	-0.68	-0.06	0.13	0.7	
21	91.92	-1.61	-4.44	91.92	-1.61	-4.44	0.0	0.0	0.0	0.01	

Device: (O); Meas.: O41E00FA.PS; Date: 180701

www.ps.bam.de/DE14/100/O41E00FA.PS

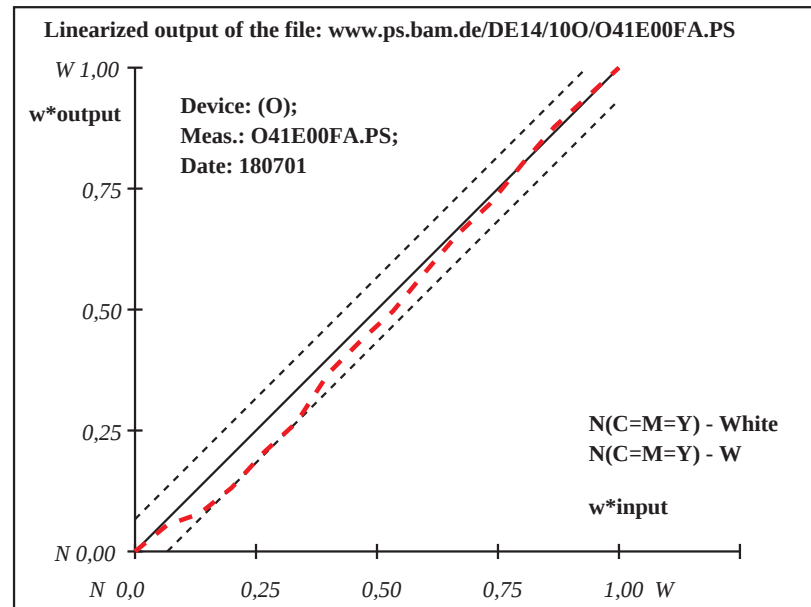

Device: (O); Meas.: O41E00FA.PS; Date: 180701

www.ps.bam.de/DE14/100/O41E00FA.PS

Output linearization of 16 colour steps according to ISO/IEC 15775; PS operator cmyn* setcmykcolor