


i	LAB*ref	LAB*out, relative	LAB*out/c-ref	ΔE^*	Start output S1
1	55.19 -35.35 -43.95	55.19 -35.35 -43.95	0.0 0.0 0.0	0.01	Specification according to
2	57.91 -32.96 -40.89	55.43 -35.14 -43.67	-2.47 -2.17 -2.78	4.32	ISO/IEC 15775 Annex G
3	60.64 -30.57 -37.82	56.47 -34.23 -42.52	-4.16 -3.65 -4.68	7.27	and DIN 33866-1 Annex G
4	63.36 -28.17 -34.76	58.89 -32.1 -39.79	-4.47 -3.92 -5.02	7.8	relative CIELAB data used for "out"
5	66.09 -25.78 -31.7	60.96 -30.29 -37.46	-5.12 -4.49 -5.76	8.94	$\Delta L^* = 96.05 - 55.19$
6	68.81 -23.39 -28.63	63.44 -28.1 -34.67	-5.36 -4.7 -6.03	9.35	Regularity
7	71.53 -21.0 -25.57	65.14 -26.61 -32.76	-6.39 -5.61 -7.18	11.14	$g^* = 33.9$
8	74.26 -18.61 -22.51	68.64 -23.54 -28.83	-5.61 -4.93 -6.31	9.79	
9	76.98 -16.21 -19.44	70.63 -21.79 -26.59	-6.34 -5.57 -7.13	11.07	Lightness gamut rel. to offset
10	79.71 -13.82 -16.38	74.54 -18.36 -22.19	-5.16 -4.53 -5.8	9.0	$f^* = 52.8$
11	82.43 -11.43 -13.32	79.57 -13.94 -16.53	-2.85 -2.5 -3.2	4.98	
12	85.15 -9.04 -10.25	83.95 -10.1 -11.61	-1.2 -1.05 -1.35	2.11	ΔL^* -gray variation
13	87.88 -6.65 -7.19	88.6 -6.01 -6.38	0.72 0.64 0.81	1.26	$v^* = 0.0$
14	90.6 -4.25 -4.13	92.77 -2.35 -1.69	2.17 1.91 2.44	3.78	
15	93.33 -1.86 -1.06	95.46 0.0 1.32	2.13 1.87 2.4	3.71	Mean CIELAB difference (16 steps)
16	96.05 0.52 1.99	96.05 0.52 1.99	0.0 0.0 0.0	0.01	$\Delta E^*_{CIELAB} = 5.9$
17	55.19 -35.35 -43.95	55.19 -35.35 -43.95	0.0 0.0 0.0	0.01	
18	65.41 -26.38 -32.46	60.44 -30.74 -38.05	-4.96 -4.35 -5.57	8.65	
19	75.62 -17.41 -20.97	69.63 -22.67 -27.71	-5.98 -5.25 -6.72	10.43	
20	85.84 -8.44 -9.49	85.11 -9.08 -10.3	-0.72 -0.63 -0.81	1.26	Mean CIELAB difference (5 steps)
21	96.05 0.52 1.99	96.05 0.52 1.99	0.0 0.0 0.0	0.01	$\Delta L^*_{CIELAB} = 4.1$
Mean colour reproduction index: $R^*_{ab,m} = 75$					

Device: (T); Meas.: T10E00NA.PS; Date: 010501

www.ps.bam.de/DE14/10T/T10E00NA.PS

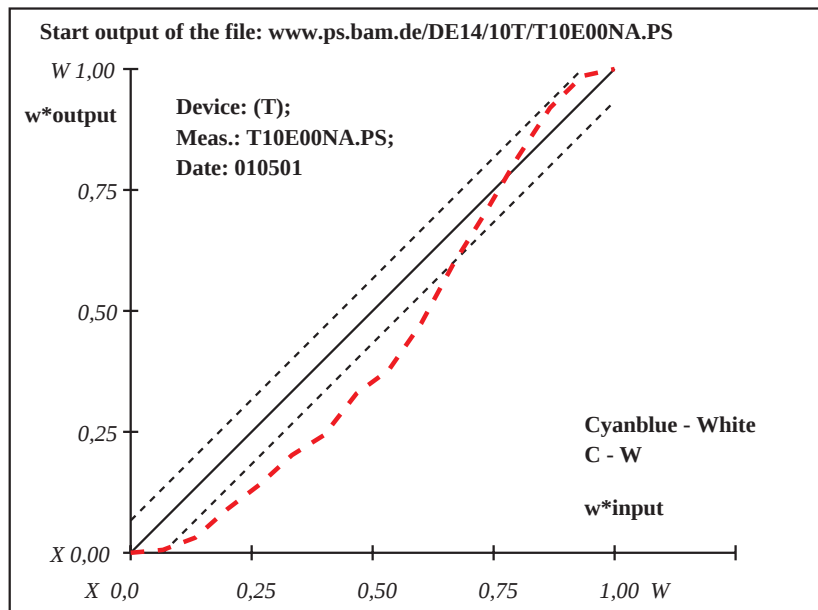


Device: (T); Meas.: T10E00NA.PS; Date: 010501

www.ps.bam.de/DE14/10T/T10E00NA.PS

i	LAB*ref	LAB*out, relative	LAB*out/c-ref	ΔE^*	Linearized output S2
1	54.72 -36.57 -42.89	54.72 -36.57 -42.89	0.0 0.0 0.0	0.01	Specification according to
2	57.45 -34.11 -39.89	56.21 -35.23 -41.25	-1.23 -1.11 -1.35	2.16	ISO/IEC 15775 Annex G
3	60.18 -31.65 -36.89	58.51 -33.15 -38.72	-1.66 -1.49 -1.82	2.9	and DIN 33866-1 Annex G
4	62.9 -29.19 -33.88	62.21 -29.82 -34.65	-0.69 -0.62 -0.76	1.21	relative CIELAB data used for "out"
5	65.63 -26.73 -30.88	64.44 -27.81 -32.2	-1.19 -1.07 -1.31	2.08	$\Delta L^* = 95.64 - 54.72$
6	68.36 -24.27 -27.88	66.94 -25.55 -29.44	-1.41 -1.27 -1.55	2.47	Regularity
7	71.09 -21.81 -24.88	69.38 -23.35 -26.76	-1.7 -1.53 -1.87	2.97	$g^* = 84.5$
8	73.82 -19.35 -21.88	73.37 -19.75 -22.37	-0.44 -0.39 -0.48	0.78	
9	76.54 -16.89 -18.87	75.92 -17.45 -19.56	-0.61 -0.55 -0.68	1.09	Lightness gamut rel. to offset
10	79.27 -14.43 -15.87	78.32 -15.29 -16.92	-0.95 -0.85 -1.04	1.66	$f^* = 52.9$
11	82.0 -11.97 -12.87	81.57 -12.36 -13.34	-0.42 -0.38 -0.46	0.74	
12	84.73 -9.51 -9.87	83.98 -10.18 -10.69	-0.73 -0.66 -0.81	1.29	ΔL^* -gray variation
13	87.46 -7.05 -6.87	87.24 -7.25 -7.11	-0.21 -0.19 -0.23	0.38	$v^* = 0.0$
14	90.18 -4.59 -3.86	90.79 -4.04 -3.19	0.61 0.55 0.67	1.06	
15	92.91 -2.13 -0.86	93.54 -1.56 -0.17	0.63 0.57 0.69	1.09	Mean CIELAB difference (16 steps)
16	95.64 0.32 2.13	95.64 0.32 2.13	0.0 0.0 0.0	0.01	$\Delta E^*_{CIELAB} = 1.4$
17	54.72 -36.57 -42.89	54.72 -36.57 -42.89	0.0 0.0 0.0	0.01	
18	64.95 -27.35 -31.63	63.88 -28.31 -32.81	-1.06 -0.96 -1.17	1.86	
19	75.18 -18.12 -20.38	74.64 -18.6 -20.97	-0.53 -0.47 -0.58	0.93	
20	85.41 -8.9 -9.12	84.8 -9.45 -9.79	-0.6 -0.54 -0.66	1.07	Mean CIELAB difference (5 steps)
21	95.64 0.32 2.13	95.64 0.32 2.13	0.0 0.0 0.0	0.01	$\Delta L^*_{CIELAB} = 0.8$
Mean colour reproduction index: $R^*_{ab,m} = 94$					

Device: (T); Meas.: T10E00FA.PS; Date: 010501

www.ps.bam.de/DE14/10T/T10E00FA.PS

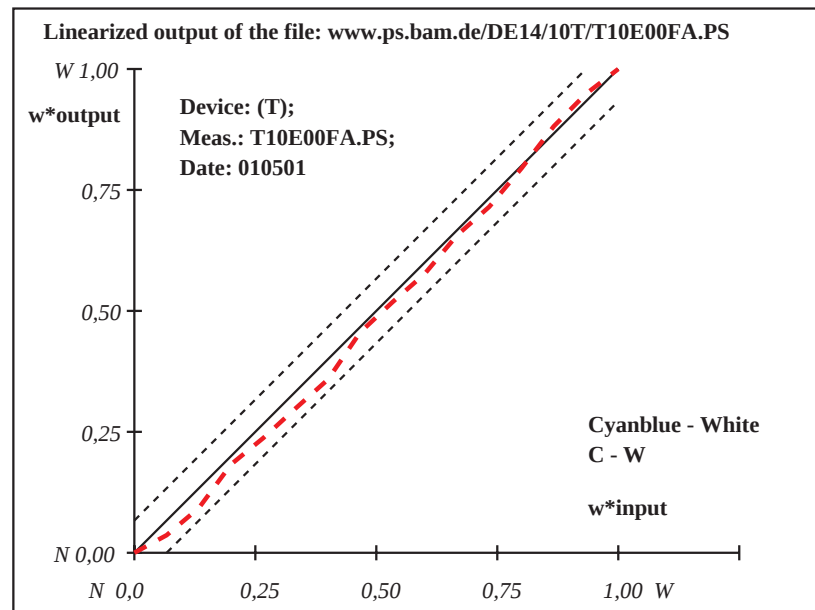


Device: (T); Meas.: T10E00FA.PS; Date: 010501

www.ps.bam.de/DE14/10T/T10E00FA.PS

i	LAB*ref			LAB*out, relative			LAB*out/c-ref			ΔE^*	Start output S1 Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G relative CIELAB data used for "out" $\Delta L^* = 96.14 - 42.32$ Regularity $g^* = 37.6$ Lightness gamut rel. to offset $f^* = 69.5$ ΔL^* -gray variation $v^* = 0.0$ Mean CIELAB difference (16 steps) $\Delta E^{*CIELAB} = 7.2$ Mean CIELAB difference (5 steps) $\Delta L^{*CIELAB} = 4.8$ Mean colour reproduction index: $R^*_{ab,m} = 70$
1	42.32	79.0	-0.85	42.32	79.0	-0.85	0.0	0.0	0.0	0.01	
2	45.91	73.76	-0.66	43.36	77.48	-0.79	-2.54	3.72	-0.13	4.51	
3	49.5	68.53	-0.47	44.62	75.65	-0.73	-4.87	7.12	-0.25	8.64	
4	53.08	63.29	-0.28	46.99	72.18	-0.6	-6.08	8.89	-0.31	10.79	
5	56.67	58.05	-0.09	50.77	66.67	-0.4	-5.9	8.62	-0.3	10.46	
6	60.26	52.81	0.09	53.64	62.48	-0.25	-6.61	9.67	-0.34	11.73	Linearized output S2 Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G relative CIELAB data used for "out" $\Delta L^* = 95.37 - 41.73$ Regularity $g^* = 76.0$ Lightness gamut rel. to offset $f^* = 69.3$ ΔL^* -gray variation $v^* = 0.0$ Mean CIELAB difference (16 steps) $\Delta E^{*CIELAB} = 2.2$ Mean CIELAB difference (5 steps) $\Delta L^{*CIELAB} = 1.3$ Mean colour reproduction index: $R^*_{ab,m} = 91$
7	63.85	47.58	0.28	56.08	58.91	-0.12	-7.76	11.34	-0.4	13.75	
8	67.44	42.34	0.47	60.27	52.8	0.09	-7.15	10.46	-0.37	12.68	
9	71.02	37.1	0.67	64.14	47.15	0.3	-6.87	10.05	-0.36	12.18	
10	74.61	31.86	0.86	68.7	40.49	0.54	-5.9	8.63	-0.3	10.47	
11	78.2	26.63	1.05	74.86	31.5	0.87	-3.33	4.87	-0.17	5.91	
12	81.79	21.39	1.24	80.64	23.07	1.18	-1.14	1.68	-0.05	2.04	
13	85.38	16.15	1.43	86.79	14.09	1.5	1.41	-2.05	0.07	2.5	
14	88.96	10.91	1.62	91.65	7.0	1.76	2.68	-3.91	0.14	4.75	
15	92.55	5.68	1.81	95.24	1.75	1.95	2.69	-3.91	0.14	4.76	
16	96.14	0.44	2.0	96.14	0.44	2.0	0.0	0.0	0.0	0.01	
17	42.32	79.0	-0.85	42.32	79.0	-0.85	0.0	0.0	0.0	0.01	
18	55.78	59.36	-0.13	49.82	68.05	-0.45	-5.94	8.69	-0.31	10.54	
19	69.23	39.72	0.57	62.21	49.97	0.2	-7.01	10.25	-0.36	12.43	
20	82.69	20.08	1.29	82.17	20.83	1.26	-0.5	0.75	-0.02	0.91	
21	96.14	0.44	2.0	96.14	0.44	2.0	0.0	0.0	0.0	0.01	

Device: (T); Meas.: T10E00NA.PS; Date: 010501

www.ps.bam.de/DE14/10T/T10E00NA.PS

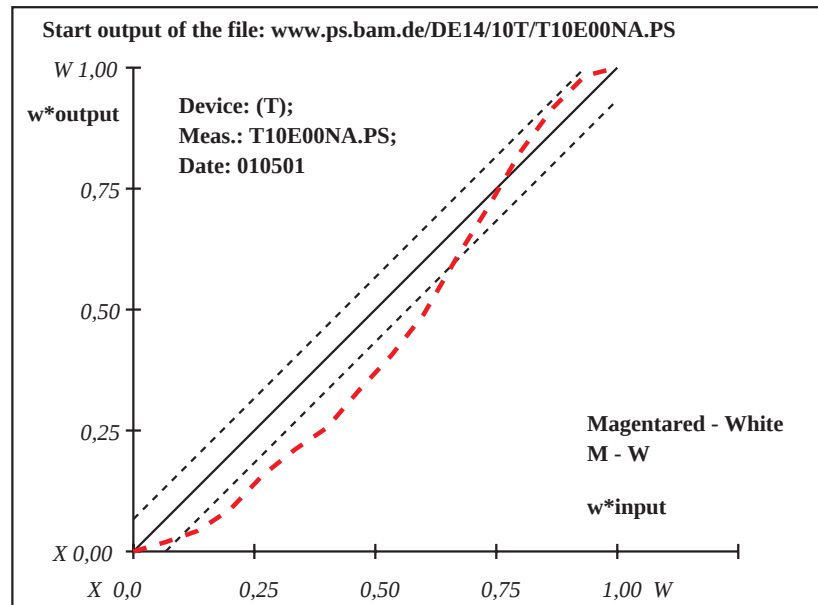


Device: (T); Meas.: T10E00NA.PS; Date: 010501

www.ps.bam.de/DE14/10T/T10E00NA.PS

i	LAB*ref			LAB*out, relative			LAB*out/c-ref			ΔE^*	Linearized output S2 Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G relative CIELAB data used for "out" $\Delta L^* = 95.37 - 41.73$ Regularity $g^* = 76.0$ Lightness gamut rel. to offset $f^* = 69.3$ ΔL^* -gray variation $v^* = 0.0$ Mean CIELAB difference (16 steps) $\Delta E^{*CIELAB} = 2.2$ Mean CIELAB difference (5 steps) $\Delta L^{*CIELAB} = 1.3$ Mean colour reproduction index: $R^*_{ab,m} = 91$
1	41.73	78.17	-0.04	41.73	78.17	-0.04	0.0	0.0	0.0	0.01	
2	45.31	72.98	0.1	44.28	74.47	0.06	-1.01	1.48	-0.03	1.8	
3	48.88	67.8	0.25	46.33	71.49	0.14	-2.54	3.7	-0.1	4.49	
4	52.46	62.61	0.4	50.19	65.89	0.31	-2.26	3.29	-0.09	3.99	
5	56.03	57.42	0.55	53.96	60.42	0.47	-2.06	3.0	-0.08	3.65	Linearized output S2 Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G relative CIELAB data used for "out" $\Delta L^* = 95.37 - 41.73$ Regularity $g^* = 76.0$ Lightness gamut rel. to offset $f^* = 69.3$ ΔL^* -gray variation $v^* = 0.0$ Mean CIELAB difference (16 steps) $\Delta E^{*CIELAB} = 2.2$ Mean CIELAB difference (5 steps) $\Delta L^{*CIELAB} = 1.3$ Mean colour reproduction index: $R^*_{ab,m} = 91$
6	59.61	52.23	0.7	56.22	57.15	0.56	-3.38	4.92	-0.13	5.97	
7	63.19	47.05	0.85	60.08	51.55	0.72	-3.09	4.5	-0.12	5.47	
8	66.76	41.86	1.0	64.77	44.75	0.92	-1.99	2.9	-0.07	3.52	
9	70.34	36.67	1.16	69.96	37.23	1.14	-0.37	0.55	-0.01	0.67	
10	73.91	31.48	1.31	74.11	31.2	1.31	0.2	-0.28	0.01	0.35	
11	77.49	26.3	1.46	77.23	26.68	1.45	-0.25	0.38	0.0	0.46	
12	81.07	21.11	1.61	80.97	21.25	1.6	-0.09	0.14	0.0	0.17	
13	84.64	15.92	1.76	85.93	14.05	1.81	1.29	-1.86	0.05	2.27	
14	88.22	10.73	1.91	88.69	10.05	1.93	0.48	-0.68	0.02	0.84	
15	91.79	5.55	2.06	93.05	3.73	2.11	1.25	-1.81	0.05	2.21	
16	95.37	0.36	2.21	95.37	0.36	2.21	0.0	0.0	0.0	0.01	
17	41.73	78.17	-0.04	41.73	78.17	-0.04	0.0	0.0	0.0	0.01	
18	55.14	58.72	0.52	53.02	61.79	0.43	-2.11	3.07	-0.08	3.73	
19	68.55	39.27	1.08	67.36	40.99	1.03	-1.18	1.73	-0.04	2.1	
20	81.96	19.81	1.65	82.21	19.45	1.66	0.25	-0.35	0.01	0.44	
21	95.37	0.36	2.21	95.37	0.36	2.21	0.0	0.0	0.0	0.01	

Device: (T); Meas.: T10E00FA.PS; Date: 010501

www.ps.bam.de/DE14/10T/T10E00FA.PS

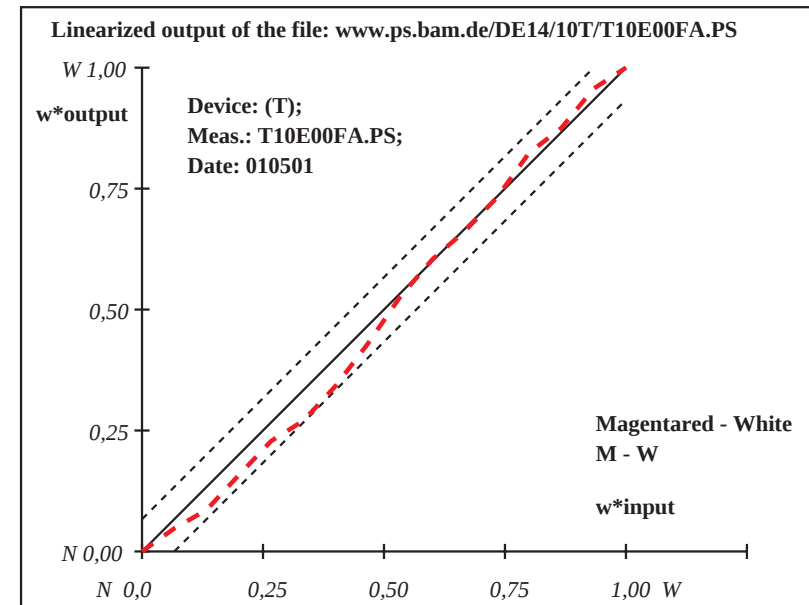

Device: (T); Meas.: T10E00FA.PS; Date: 010501


www.ps.bam.de/DE14/10T/T10E00FA.PS

Output linearization of 16 colour steps according to ISO/IEC 15775; PS operator cmyn* setcmykcolor

i	LAB*ref	LAB*out, relative	LAB*out/c-ref	ΔE^*
1	89.84 -16.75 110.97	89.84 -16.75 110.97	0.0 0.0 0.0	0.01
2	90.26 -15.6 103.72	89.85 -16.72 110.78	-0.4 -1.11 7.06	7.16
3	90.67 -14.45 96.47	90.12 -15.97 106.07	-0.54 -1.51 9.6	9.73
4	91.09 -13.31 89.22	90.62 -14.6 97.36	-0.46 -1.28 8.15	8.26
5	91.51 -12.16 81.97	91.14 -13.17 88.36	-0.36 -1.0 6.4	6.49
6	91.93 -11.01 74.72	91.42 -12.39 83.45	-0.49 -1.37 8.74	8.86
7	92.34 -9.86 67.47	91.75 -11.5 77.82	-0.59 -1.63 10.36	10.5
8	92.76 -8.71 60.22	92.11 -10.49 71.45	-0.64 -1.77 11.24	11.39
9	93.18 -7.57 52.96	92.71 -8.86 61.16	-0.46 -1.29 8.19	8.31
10	93.6 -6.42 45.71	93.21 -7.47 52.36	-0.37 -1.04 6.65	6.74
11	94.01 -5.27 38.46	94.02 -5.27 38.43	0.0 0.0 -0.02	0.03
12	94.43 -4.12 31.21	94.64 -3.53 27.49	0.21 0.59 -3.71	3.77
13	94.85 -2.97 23.96	95.18 -2.06 18.2	0.33 0.91 -5.75	5.84
14	95.27 -1.83 16.71	95.61 -0.87 10.68	0.35 0.95 -6.02	6.11
15	95.68 -0.68 9.46	96.01 0.21 3.77	0.33 0.9 -5.68	5.77
16	96.1 0.46 2.21	96.1 0.46 2.21	0.0 0.0 0.0	0.01
17	89.84 -16.75 110.97	89.84 -16.75 110.97	0.0 0.0 0.0	0.01
18	91.41 -12.45 83.78	91.01 -13.53 90.61	-0.38 -1.07 6.83	6.93
19	92.97 -8.14 56.59	92.41 -9.68 66.3	-0.55 -1.53 9.71	9.85
20	94.54 -3.84 29.4	94.78 -3.17 25.17	0.24 0.67 -4.22	4.29
21	96.1 0.46 2.21	96.1 0.46 2.21	0.0 0.0 0.0	0.01
Mean CIELAB difference (16 steps)				
$\Delta E^*_{CIELAB} = 6.2$				
Mean CIELAB difference (5 steps)				
$\Delta L^*_{CIELAB} = 4.2$				
Mean colour reproduction index: $R^*_{ab,m} = 74$				

Device: (T); Meas.: T10E00NA.PS; Date: 010501

www.ps.bam.de/DE14/10T/T10E00NA.PS

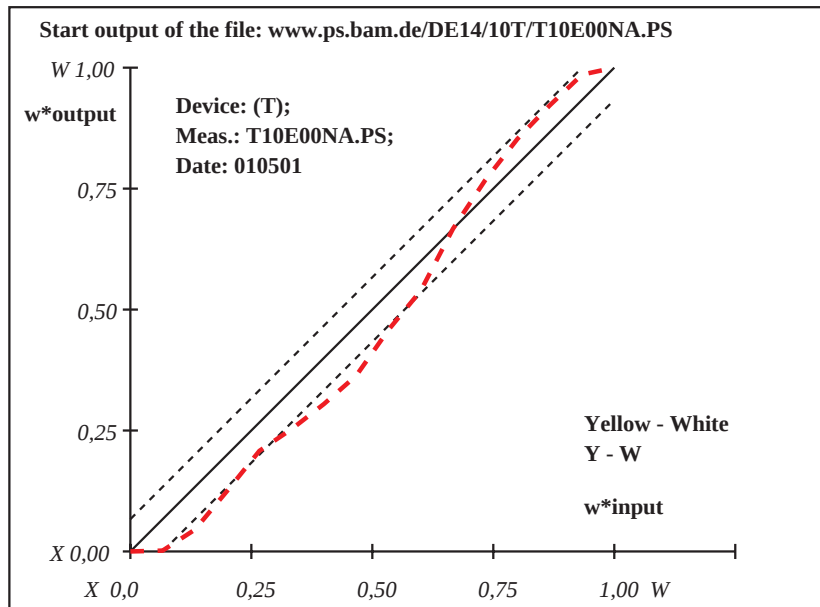


Device: (T); Meas.: T10E00NA.PS; Date: 010501

www.ps.bam.de/DE14/10T/T10E00NA.PS

i	LAB*ref	LAB*out, relative	LAB*out/c-ref	ΔE^*
1	88.23 -16.97 108.9	88.23 -16.97 108.9	0.0 0.0 0.0	0.01
2	88.69 -15.81 101.79	88.38 -16.6 106.65	-0.3 -0.78 4.86	4.94
3	89.15 -14.65 94.68	88.69 -15.82 101.83	-0.45 -1.16 7.15	7.26
4	89.61 -13.49 87.57	89.19 -14.55 94.05	-0.41 -1.05 6.48	6.58
5	90.07 -12.33 80.46	89.94 -12.65 82.41	-0.12 -0.31 1.95	1.98
6	90.53 -11.17 73.35	90.39 -11.51 75.43	-0.12 -0.33 2.08	2.11
7	90.99 -10.01 66.24	90.77 -10.56 69.61	-0.21 -0.54 3.38	3.43
8	91.45 -8.85 59.13	91.28 -9.28 61.71	-0.16 -0.41 2.59	2.63
9	91.9 -7.7 52.01	91.67 -8.28 55.59	-0.22 -0.57 3.58	3.63
10	92.36 -6.54 44.9	92.26 -6.81 46.59	-0.1 -0.26 1.68	1.71
11	92.82 -5.38 37.79	92.55 -6.08 42.09	-0.27 -0.69 4.3	4.37
12	93.28 -4.22 30.68	93.01 -4.9 34.89	-0.26 -0.68 4.21	4.27
13	93.74 -3.06 23.57	93.62 -3.37 25.51	-0.12 -0.31 1.94	1.97
14	94.2 -1.9 16.46	94.21 -1.87 16.28	0.01 0.03 -0.17	0.18
15	94.66 -0.74 9.35	94.71 -0.61 8.53	0.05 0.13 -0.81	0.83
16	95.12 0.41 2.24	95.12 0.41 2.24	0.0 0.0 0.0	0.01
17	88.23 -16.97 108.9	88.23 -16.97 108.9	0.0 0.0 0.0	0.01
18	89.95 -12.62 82.24	89.75 -13.13 85.32	-0.19 -0.49 3.08	3.13
19	91.68 -8.28 55.57	91.48 -8.78 58.65	-0.19 -0.49 3.08	3.13
20	93.4 -3.93 28.91	93.16 -4.52 32.55	-0.23 -0.58 3.64	3.7
21	95.12 0.41 2.24	95.12 0.41 2.24	0.0 0.0 0.0	0.01
Mean CIELAB difference (16 steps)				
$\Delta E^*_{CIELAB} = 2.9$				
Mean CIELAB difference (5 steps)				
$\Delta L^*_{CIELAB} = 2.0$				
Mean colour reproduction index: $R^*_{ab,m} = 88$				

Device: (T); Meas.: T10E00FA.PS; Date: 010501

www.ps.bam.de/DE14/10T/T10E00FA.PS

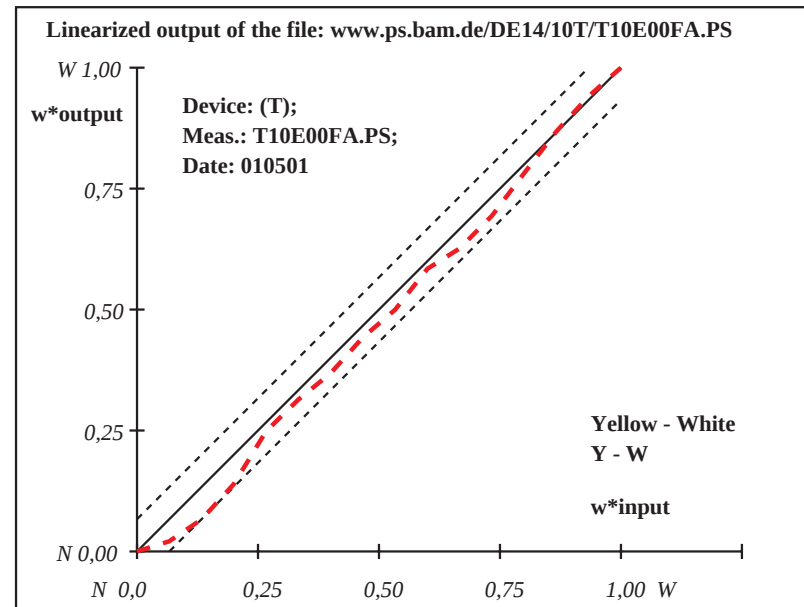

Device: (T); Meas.: T10E00FA.PS; Date: 010501


www.ps.bam.de/DE14/10T/T10E00FA.PS

Output linearization of 16 colour steps according to ISO/IEC 15775; PS operator cmyn* setcmykcolor

i	LAB*ref			LAB*out, relative			LAB*out/c-ref			ΔE^*	Start output S1 Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G relative CIELAB data used for "out" $\Delta L^* = 96.09 - 11.71$ Regularity $g^* = 53.9$ Lightness gamut rel. to offset $f^* = 109.0$ ΔL^* -gray variation $v^* = 0.0$ Mean CIELAB difference (16 steps) $\Delta E^{*}_{CIELAB} = 2.7$ Mean CIELAB difference (5 steps) $\Delta L^{*}_{CIELAB} = 1.9$ Mean colour reproduction index: $R^*_{ab,m} = 88$
1	11.71	-1.19	2.09	11.71	-1.19	2.09	0.0	0.0	0.0	0.01	
2	17.34	-1.08	2.09	14.57	-1.14	2.09	-2.76	-0.04	0.0	2.77	
3	22.96	-0.98	2.09	22.06	-1.0	2.09	-0.89	-0.01	0.0	0.9	
4	28.59	-0.87	2.09	29.44	-0.86	2.09	0.86	0.02	0.0	0.86	
5	34.21	-0.77	2.09	35.82	-0.74	2.09	1.61	0.03	0.0	1.61	
6	39.84	-0.66	2.09	39.96	-0.66	2.09	0.12	0.0	0.0	0.12	Linearized output S2 Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G relative CIELAB data used for "out" $\Delta L^* = 95.25 - 11.46$ Regularity $g^* = 93.0$ Lightness gamut rel. to offset $f^* = 108.3$ ΔL^* -gray variation $v^* = 0.0$ Mean CIELAB difference (16 steps) $\Delta E^{*}_{CIELAB} = 0.9$ Mean CIELAB difference (5 steps) $\Delta L^{*}_{CIELAB} = 0.4$ Mean colour reproduction index: $R^*_{ab,m} = 96$
7	45.46	-0.56	2.09	44.07	-0.58	2.09	-1.38	-0.02	0.0	1.39	
8	51.09	-0.45	2.09	53.25	-0.41	2.09	2.16	0.04	0.0	2.17	
9	56.71	-0.35	2.08	57.34	-0.34	2.08	0.62	0.01	0.0	0.62	
10	62.34	-0.24	2.08	64.47	-0.2	2.08	2.13	0.04	0.0	2.13	
11	67.96	-0.14	2.08	72.02	-0.06	2.08	4.05	0.08	0.0	4.05	
12	73.59	-0.03	2.08	80.08	0.08	2.08	6.49	0.12	0.0	6.49	
13	79.21	0.06	2.08	86.97	0.21	2.08	7.76	0.15	0.0	7.76	
14	84.84	0.17	2.08	92.26	0.31	2.08	7.42	0.14	0.0	7.42	
15	90.46	0.27	2.08	95.37	0.37	2.08	4.91	0.09	0.0	4.91	
16	96.09	0.38	2.08	96.09	0.38	2.08	0.0	0.0	0.0	0.01	
17	11.71	-1.19	2.09	11.71	-1.19	2.09	0.0	0.0	0.0	0.01	Linearized output S2 Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G relative CIELAB data used for "out" $\Delta L^* = 95.25 - 11.46$ Regularity $g^* = 93.0$ Lightness gamut rel. to offset $f^* = 108.3$ ΔL^* -gray variation $v^* = 0.0$ Mean CIELAB difference (16 steps) $\Delta E^{*}_{CIELAB} = 0.9$ Mean CIELAB difference (5 steps) $\Delta L^{*}_{CIELAB} = 0.4$ Mean colour reproduction index: $R^*_{ab,m} = 96$
18	32.81	-0.8	2.09	34.23	-0.77	2.09	1.42	0.03	0.0	1.42	
19	53.9	-0.4	2.09	55.29	-0.37	2.08	1.39	0.03	0.0	1.39	
20	74.99	0.0	2.08	81.8	0.11	2.08	6.81	0.13	0.0	6.81	
21	96.09	0.38	2.08	96.09	0.38	2.08	0.0	0.0	0.0	0.01	

Device: (T); Meas.: T10E00NA.PS; Date: 010501

www.ps.bam.de/DE14/10T/T10E00NA.PS

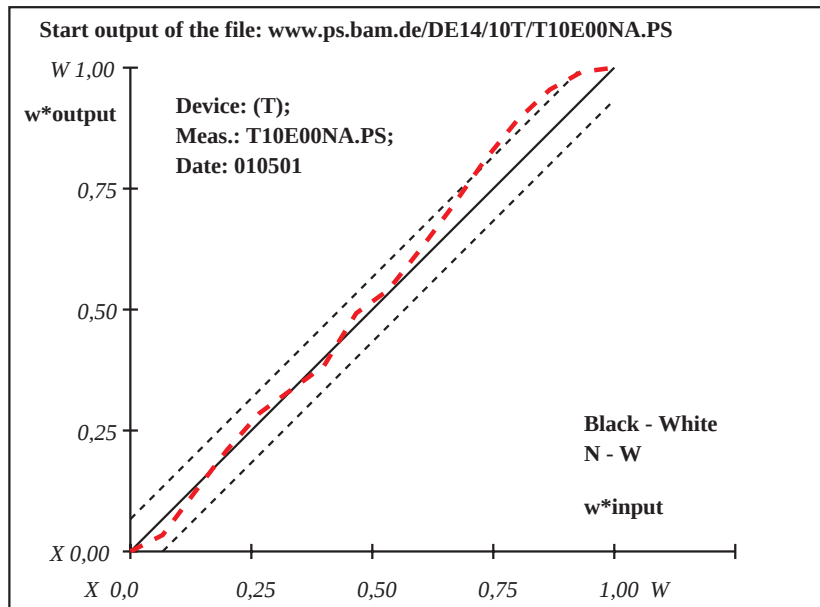


Device: (T); Meas.: T10E00NA.PS; Date: 010501

www.ps.bam.de/DE14/10T/T10E00NA.PS

i	LAB*ref			LAB*out, relative			LAB*out/c-ref			ΔE^*	Linearized output S2 Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G relative CIELAB data used for "out" $\Delta L^* = 95.25 - 11.46$ Regularity $g^* = 93.0$ Lightness gamut rel. to offset $f^* = 108.3$ ΔL^* -gray variation $v^* = 0.0$ Mean CIELAB difference (16 steps) $\Delta E^{*}_{CIELAB} = 0.9$ Mean CIELAB difference (5 steps) $\Delta L^{*}_{CIELAB} = 0.4$ Mean colour reproduction index: $R^*_{ab,m} = 96$
1	11.46	-2.68	4.94	11.46	-2.68	4.94	0.0	0.0	0.0	0.01	
2	17.05	-2.47	4.75	16.97	-2.48	4.75	-0.07	0.0	0.0	0.08	
3	22.63	-2.27	4.56	24.63	-2.19	4.49	2.0	0.07	-0.06	2.0	
4	28.22	-2.06	4.36	27.63	-2.08	4.38	-0.58	-0.01	0.02	0.59	
5	33.8	-1.86	4.17	34.41	-1.83	4.15	0.6	0.02	-0.01	0.61	
6	39.39	-1.65	3.98	41.82	-1.56	3.9	2.43	0.09	-0.07	2.43	Linearized output S2 Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G relative CIELAB data used for "out" $\Delta L^* = 95.25 - 11.46$ Regularity $g^* = 93.0$ Lightness gamut rel. to offset $f^* = 108.3$ ΔL^* -gray variation $v^* = 0.0$ Mean CIELAB difference (16 steps) $\Delta E^{*}_{CIELAB} = 0.9$ Mean CIELAB difference (5 steps) $\Delta L^{*}_{CIELAB} = 0.4$ Mean colour reproduction index: $R^*_{ab,m} = 96$
7	44.98	-1.44	3.79	47.32	-1.36	3.71	2.34	0.09	-0.07	2.34	
8	50.56	-1.24	3.6	51.64	-1.2	3.56	1.07	0.04	-0.03	1.07	
9	56.15	-1.03	3.4	57.41	-0.99	3.36	1.26	0.05	-0.03	1.26	
10	61.73	-0.83	3.21	62.41	-0.8	3.19	0.68	0.03	-0.01	0.68	
11	67.32	-0.62	3.02	68.09	-0.59	2.99	0.77	0.03	-0.02	0.77	
12	72.91	-0.41	2.83	73.62	-0.39	2.8	0.72	0.03	-0.01	0.72	
13	78.49	-0.21	2.64	79.03	-0.19	2.62	0.54	0.02	-0.01	0.54	
14	84.08	0.0	2.44	84.71	0.01	2.42	0.63	0.02	-0.01	0.64	
15	89.66	0.19	2.25	89.9	0.2	2.24	0.23	0.01	0.0	0.23	
16	95.25	0.4	2.06	95.25	0.4	2.06	0.0	0.0	0.0	0.01	
17	11.46	-2.68	4.94	11.46	-2.68	4.94	0.0	0.0	0.0	0.01	Linearized output S2 Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G relative CIELAB data used for "out" $\Delta L^* = 95.25 - 11.46$ Regularity $g^* = 93.0$ Lightness gamut rel. to offset $f^* = 108.3$ ΔL^* -gray variation $v^* = 0.0$ Mean CIELAB difference (16 steps) $\Delta E^{*}_{CIELAB} = 0.9$ Mean CIELAB difference (5 steps) $\Delta L^{*}_{CIELAB} = 0.4$ Mean colour reproduction index: $R^*_{ab,m} = 96$
18	32.41	-1.91	4.22	32.71	-1.9	4.21	0.31	0.01	0.0	0.31	
19	53.36	-1.14	3.5	54.52	-1.09	3.46	1.17	0.04	-0.03	1.17	
20	74.3	-0.36	2.78	74.97	-0.34	2.76	0.67	0.02	-0.01	0.67	
21	95.25	0.4	2.06	95.25	0.4	2.06	0.0	0.0	0.0	0.01	

Device: (T); Meas.: T10E00FA.PS; Date: 010501

www.ps.bam.de/DE14/10T/T10E00FA.PS

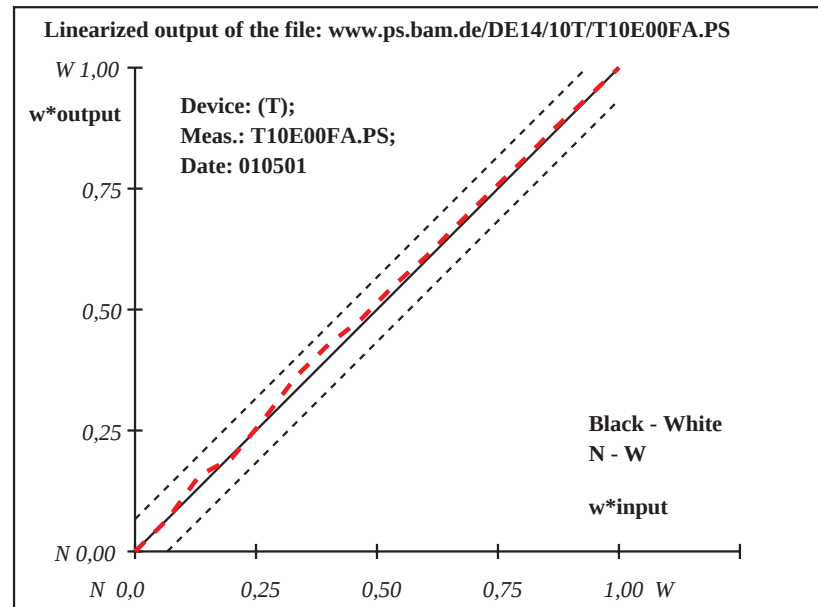


Device: (T); Meas.: T10E00FA.PS; Date: 010501

www.ps.bam.de/DE14/10T/T10E00FA.PS

i	LAB*ref			LAB*out, relative			LAB*out/c-ref			ΔE^*
1	41.82	66.29	53.14	41.82	66.29	53.14	0.0	0.0	0.0	0.01
2	45.43	61.91	49.73	42.85	65.05	52.17	-2.58	3.13	2.44	4.74
3	49.05	57.54	46.32	43.02	64.84	52.01	-6.02	7.3	5.69	11.05
4	52.66	53.16	42.92	44.71	62.8	50.42	-7.95	9.64	7.5	14.58
5	56.28	48.78	39.51	47.51	59.4	47.77	-8.76	10.62	8.27	16.06
6	59.89	44.41	36.1	50.8	55.42	44.68	-9.09	11.02	8.58	16.66
7	63.51	40.03	32.69	53.64	51.98	42.0	-9.86	11.95	9.31	18.08
8	67.12	35.65	29.28	58.17	46.49	37.72	-8.94	10.84	8.44	16.4
9	70.74	31.28	25.88	63.17	40.44	33.01	-7.55	9.16	7.13	13.86
10	74.35	26.9	22.47	68.29	34.24	28.18	-6.05	7.34	5.71	11.1
11	77.97	22.52	19.06	74.52	26.7	22.31	-3.44	4.17	3.25	6.31
12	81.58	18.15	15.65	79.65	20.48	17.47	-1.92	2.34	1.82	3.54
13	85.2	13.77	12.24	85.94	12.87	11.54	0.74	-0.89	-0.69	1.36
14	88.81	9.39	8.84	90.77	7.02	6.99	1.96	-2.36	-1.84	3.59
15	92.43	5.02	5.43	94.88	2.05	3.12	2.45	-2.96	-2.3	4.49
16	96.04	0.64	2.02	96.04	0.64	2.02	0.0	0.0	0.0	0.01
17	41.82	66.29	53.14	41.82	66.29	53.14	0.0	0.0	0.0	0.01
18	55.38	49.88	40.36	46.81	60.25	48.44	-8.55	10.37	8.08	15.69
19	68.93	33.47	27.58	60.67	43.46	35.37	-8.25	10.0	7.79	15.13
20	82.49	17.05	14.8	81.22	18.58	15.99	-1.25	1.53	1.19	2.31
21	96.04	0.64	2.02	96.04	0.64	2.02	0.0	0.0	0.0	0.01
Mean colour reproduction index: $R^*_{ab,m} = 62$										

Device: (T); Meas.: T10E00NA.PS; Date: 010501

www.ps.bam.de/DE14/10T/T10E00NA.PS

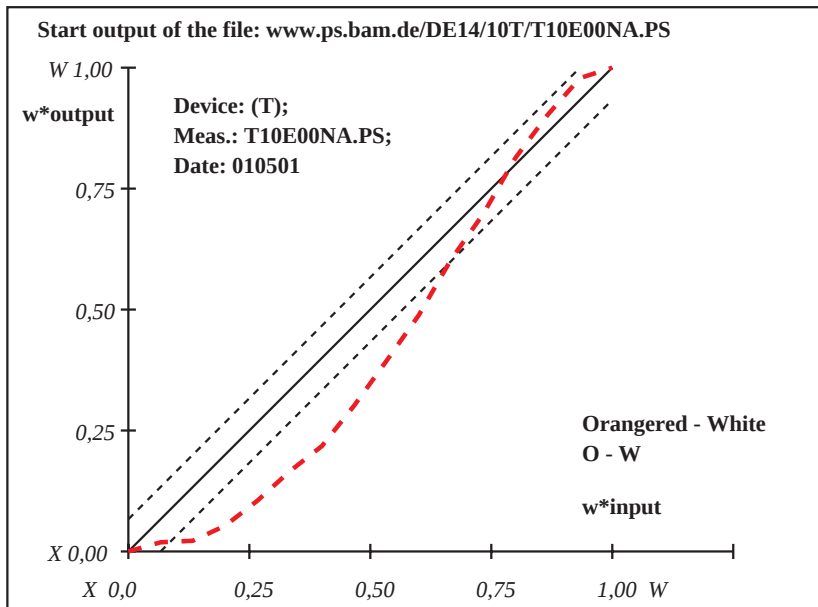


Device: (T); Meas.: T10E00NA.PS; Date: 010501

www.ps.bam.de/DE14/10T/T10E00NA.PS

i	LAB*ref			LAB*out, relative			LAB*out/c-ref			ΔE^*
1	41.38	64.78	54.0	41.38	64.78	54.0	0.0	0.0	0.0	0.01
2	44.95	60.47	50.55	43.15	62.65	52.29	-1.8	2.18	1.74	3.32
3	48.53	56.16	47.1	46.43	58.69	49.12	-2.08	2.53	2.02	3.85
4	52.1	51.85	43.65	49.96	54.43	45.72	-2.13	2.58	2.07	3.94
5	55.67	47.55	40.2	54.01	49.54	41.8	-1.65	2.0	1.6	3.05
6	59.24	43.24	36.75	57.07	45.86	38.85	-2.16	2.62	2.1	4.0
7	62.82	38.93	33.3	59.26	43.22	36.74	-3.54	4.29	3.43	6.54
8	66.39	34.62	29.85	64.55	36.83	31.63	-1.83	2.22	1.77	3.38
9	69.96	30.31	26.41	69.4	30.99	26.95	-0.55	0.67	0.54	1.03
10	73.53	26.0	22.96	72.96	26.69	23.51	-0.56	0.69	0.55	1.06
11	77.11	21.69	19.51	77.68	21.0	18.95	0.57	-0.68	-0.54	1.06
12	80.68	17.38	16.06	80.6	17.48	16.13	-0.07	0.09	0.08	0.14
13	84.25	13.08	12.61	84.71	12.53	12.17	0.45	-0.54	-0.43	0.84
14	87.82	8.77	9.16	89.07	7.27	7.96	1.24	-1.49	-1.19	2.28
15	91.4	4.46	5.71	92.93	2.62	4.23	1.53	-1.83	-1.46	2.81
16	94.97	0.15	2.26	94.97	0.15	2.26	0.0	0.0	0.0	0.01
17	41.38	64.78	54.0	41.38	64.78	54.0	0.0	0.0	0.0	0.01
18	54.78	48.62	41.07	53.0	50.77	42.78	-1.77	2.14	1.72	3.27
19	68.18	32.47	28.13	66.98	33.91	29.29	-1.19	1.45	1.16	2.21
20	81.57	16.31	15.2	81.63	16.24	15.14	0.06	-0.06	-0.04	0.1
21	94.97	0.15	2.26	94.97	0.15	2.26	0.0	0.0	0.0	0.01
Mean colour reproduction index: $R^*_{ab,m} = 91$										

Device: (T); Meas.: T10E00FA.PS; Date: 010501

www.ps.bam.de/DE14/10T/T10E00FA.PS

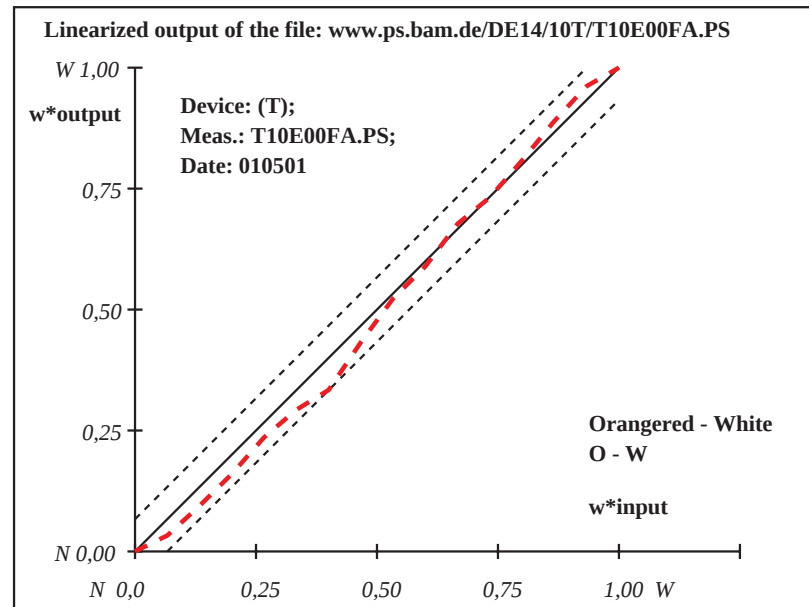

Device: (T); Meas.: T10E00FA.PS; Date: 010501

www.ps.bam.de/DE14/10T/T10E00FA.PS


Output linearization of 16 colour steps according to ISO/IEC 15775; PS operator cmyn* setcmykcolor

i	LAB*ref	LAB*out, relative	LAB*out/c-ref	ΔE^*
1	50.32 -78.7 44.7	50.32 -78.7 44.7	0.0 0.0 0.0	0.01
2	53.38 -73.43 41.87	51.26 -77.07 43.82	-2.1 -3.63 1.96	4.65
3	56.43 -68.15 39.03	54.04 -72.28 41.25	-2.38 -4.12 2.22	5.26
4	59.49 -62.88 36.2	54.89 -70.82 40.46	-4.59 -7.93 4.27	10.12
5	62.54 -57.6 33.36	58.47 -64.63 37.14	-4.06 -7.01 3.78	8.95
6	65.6 -52.33 30.53	60.18 -61.68 35.55	-5.41 -9.34 5.02	11.91
7	68.66 -47.06 27.69	63.66 -55.68 32.33	-4.99 -8.61 4.63	10.99
8	71.71 -41.78 24.86	66.7 -50.44 29.51	-5.0 -8.64 4.65	11.03
9	74.77 -36.51 22.02	70.08 -44.6 26.37	-4.68 -8.09 4.35	10.32
10	77.82 -31.23 19.19	73.24 -39.14 23.44	-4.57 -7.89 4.25	10.07
11	80.88 -25.96 16.35	78.06 -30.83 18.97	-2.81 -4.86 2.61	6.2
12	83.94 -20.69 13.52	82.82 -22.61 14.55	-1.11 -1.92 1.03	2.45
13	86.99 -15.41 10.68	87.09 -15.24 10.59	0.1 0.17 -0.08	0.22
14	90.05 -10.14 7.85	90.81 -8.83 7.15	0.76 1.31 -0.69	1.67
15	93.1 -4.86 5.01	95.19 -1.27 3.08	2.09 3.6 -1.92	4.59
16	96.16 0.4 2.18	96.16 0.4 2.18	0.0 0.0 0.0	0.01
17	50.32 -78.7 44.7	50.32 -78.7 44.7	0.0 0.0 0.0	0.01
18	61.78 -58.92 34.07	57.58 -66.18 37.97	-4.19 -7.24 3.9	9.25
19	73.24 -39.15 23.44	68.39 -47.52 27.94	-4.84 -8.36 4.5	10.67
20	84.7 -19.37 12.81	83.89 -20.77 13.56	-0.8 -1.39 0.75	1.79
21	96.16 0.4 2.18	96.16 0.4 2.18	0.0 0.0 0.0	0.01
Mean colour reproduction index: $R^*_{ab,m} = 74$				

Start output S1
Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 96.16 - 50.32$
Regularity
 $g^* = 46.8$
Lightness gamut rel. to offset
 $f^* = 59.2$
 ΔL^* -gray variation
 $v^* = 0.0$
Mean CIELAB difference (16 steps)
 $\Delta E^*_{CIELAB} = 6.2$
Mean CIELAB difference (5 steps)
 $\Delta L^*_{CIELAB} = 4.3$

Device: (T); Meas.: T10E00NA.PS; Date: 010501

www.ps.bam.de/DE14/10T/T10E00NA.PS

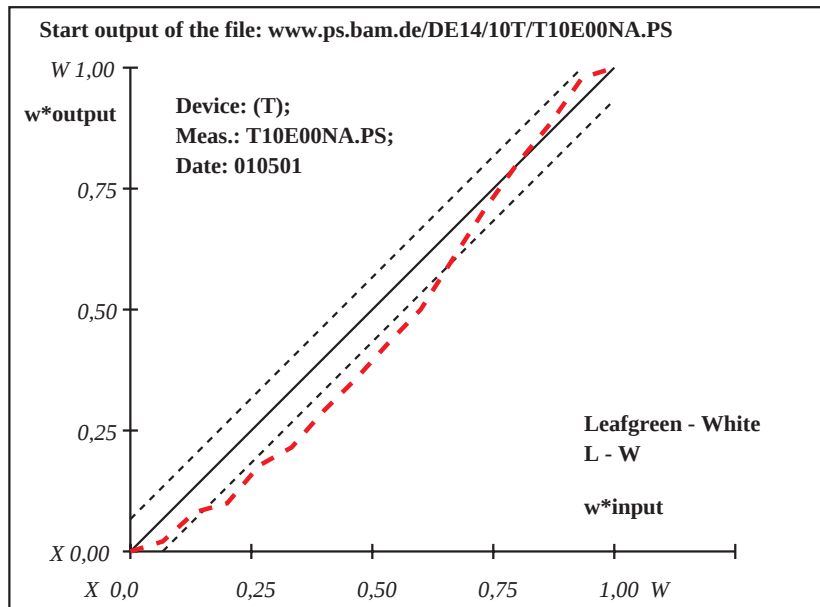

Device: (T); Meas.: T10E00NA.PS; Date: 010501


www.ps.bam.de/DE14/10T/T10E00NA.PS

i	LAB*ref	LAB*out, relative	LAB*out/c-ref	ΔE^*
1	49.36 -79.32 41.76	49.36 -79.32 41.76	0.0 0.0 0.0	0.01
2	52.38 -74.02 39.12	49.84 -78.47 41.34	-2.53 -4.44 2.22	5.58
3	55.4 -68.72 36.48	52.88 -73.14 38.68	-2.51 -4.41 2.2	5.54
4	58.42 -63.42 33.84	55.7 -68.19 36.21	-2.71 -4.76 2.38	5.98
5	61.45 -58.12 31.2	59.86 -60.89 32.58	-1.57 -2.77 1.38	3.48
6	64.47 -52.82 28.56	62.87 -55.62 29.95	-1.59 -2.79 1.4	3.52
7	67.49 -47.52 25.92	64.56 -52.65 28.47	-2.92 -5.12 2.56	6.44
8	70.51 -42.22 23.28	69.34 -44.27 24.3	-1.16 -2.05 1.03	2.58
9	73.53 -36.91 20.63	73.17 -37.55 20.95	-0.35 -0.63 0.32	0.8
10	76.55 -31.61 17.99	75.81 -32.91 18.64	-0.73 -1.29 0.65	1.63
11	79.57 -26.31 15.35	78.21 -28.71 16.55	-1.36 -2.39 1.19	3.01
12	82.59 -21.01 12.71	82.38 -21.4 12.9	-0.21 -0.37 0.19	0.48
13	85.62 -15.71 10.07	85.62 -15.71 10.07	0.0 0.0 0.0	0.01
14	88.64 -10.41 7.43	89.79 -8.39 6.42	1.15 2.02 -1.0	2.54
15	91.66 -5.11 4.79	92.78 -3.15 3.81	1.12 1.96 -0.97	2.46
16	94.68 0.18 2.15	94.68 0.18 2.15	0.0 0.0 0.0	0.01
17	49.36 -79.32 41.76	49.36 -79.32 41.76	0.0 0.0 0.0	0.01
18	60.69 -59.44 31.86	58.82 -62.72 33.49	-1.86 -3.27 1.63	4.11
19	72.02 -39.57 21.96	71.25 -40.91 22.63	-0.76 -1.34 0.67	1.69
20	83.35 -19.69 12.05	83.19 -19.97 12.2	-0.15 -0.28 0.14	0.36
21	94.68 0.18 2.15	94.68 0.18 2.15	0.0 0.0 0.0	0.01
Mean colour reproduction index: $R^*_{ab,m} = 89$				

Linearized output S2
Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 94.68 - 49.36$
Regularity
 $g^* = 76.1$
Lightness gamut rel. to offset
 $f^* = 58.6$
 ΔL^* -gray variation
 $v^* = 0.0$
Mean CIELAB difference (16 steps)
 $\Delta E^*_{CIELAB} = 2.8$
Mean CIELAB difference (5 steps)
 $\Delta L^*_{CIELAB} = 1.2$

Device: (T); Meas.: T10E00FA.PS; Date: 010501

www.ps.bam.de/DE14/10T/T10E00FA.PS

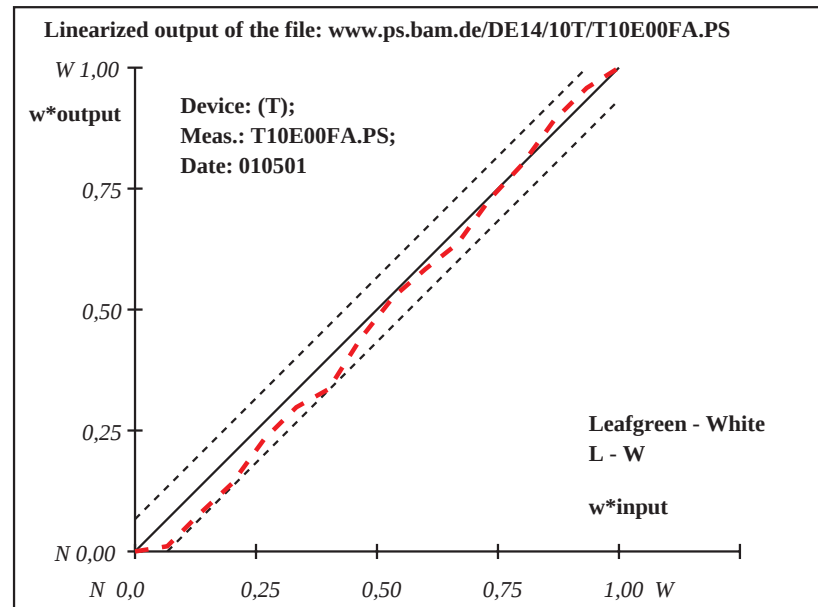

Device: (T); Meas.: T10E00FA.PS; Date: 010501


www.ps.bam.de/DE14/10T/T10E00FA.PS

i	LAB*ref	LAB*out, relative	LAB*out/c-ref	ΔE^*
1	36.16 -3.69 -44.27	36.16 -3.69 -44.27	0.0 0.0 0.0	0.01
2	40.16 -3.41 -41.19	39.52 -3.46 -41.68	-0.63 -0.03 -0.48	0.81
3	44.17 -3.14 -38.11	41.76 -3.3 -39.96	-2.39 -0.16 -1.84	3.04
4	48.17 -2.86 -35.03	45.12 -3.07 -37.37	-3.03 -0.2 -2.33	3.85
5	52.17 -2.59 -31.94	47.52 -2.91 -35.52	-4.64 -0.31 -3.57	5.87
6	56.17 -2.31 -28.86	50.51 -2.7 -33.23	-5.66 -0.38 -4.35	7.16
7	60.18 -2.04 -25.78	53.63 -2.49 -30.82	-6.54 -0.44 -5.03	8.28
8	64.18 -1.76 -22.7	57.17 -2.24 -28.09	-7.0 -0.47 -5.38	8.86
9	68.18 -1.49 -19.62	59.95 -2.05 -25.96	-8.22 -0.56 -6.33	10.4
10	72.18 -1.21 -16.54	65.06 -1.7 -22.02	-7.11 -0.48 -5.47	9.0
11	76.19 -0.94 -13.46	71.57 -1.25 -17.01	-4.6 -0.31 -3.54	5.83
12	80.19 -0.66 -10.38	77.63 -0.84 -12.35	-2.55 -0.17 -1.96	3.24
13	84.19 -0.39 -7.29	84.5 -0.36 -7.06	0.31 0.02 0.24	0.39
14	88.19 -0.11 -4.21	90.17 0.02 -2.69	1.97 0.14 1.52	2.5
15	92.2 0.15 -1.13	94.71 0.33 0.79	2.51 0.17 1.93	3.17
16	96.2 0.43 1.94	96.2 0.43 1.94	0.0 0.0 0.0	0.01
17	36.16 -3.69 -44.27	36.16 -3.69 -44.27	0.0 0.0 0.0	0.01
18	51.17 -2.66 -32.71	46.92 -2.95 -35.98	-4.24 -0.28 -3.26	5.37
19	66.18 -1.63 -21.16	58.56 -2.15 -27.03	-7.61 -0.51 -5.86	9.63
20	81.19 -0.59 -9.61	79.34 -0.72 -11.03	-1.84 -0.12 -1.41	2.33
21	96.2 0.43 1.94	96.2 0.43 1.94	0.0 0.0 0.0	0.01
Mean colour reproduction index: $R^*_{ab,m} = 80$				

Start output S1
Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 96.2 - 36.16$
Regularity
 $g^* = 51.8$
Lightness gamut rel. to offset
 $f^* = 77.6$
 ΔL^* -gray variation
 $v^* = 0.0$
Mean CIELAB difference (16 steps)
 $\Delta E^*_{CIELAB} = 4.5$
Mean CIELAB difference (5 steps)
 $\Delta L^*_{CIELAB} = 3.5$

Device: (T); Meas.: T10E00NA.PS; Date: 010501

www.ps.bam.de/DE14/10T/T10E00NA.PS

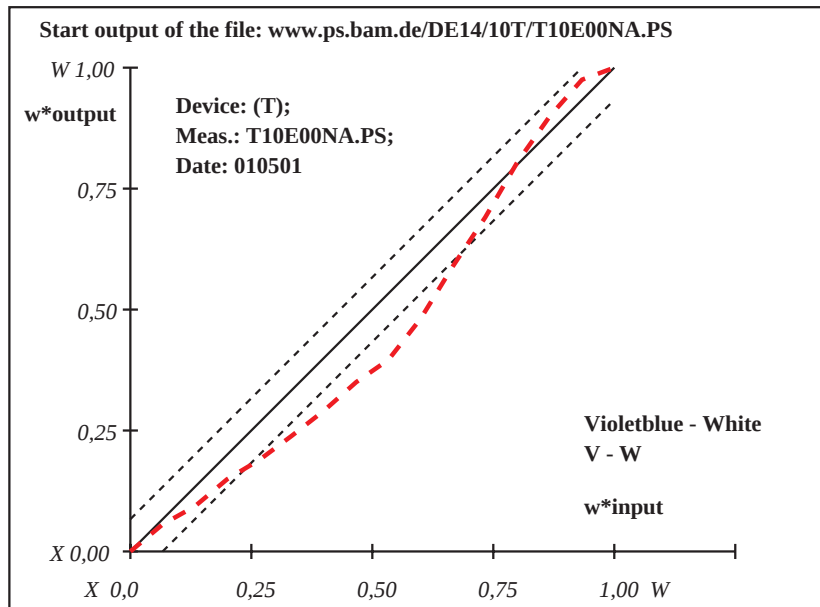

Device: (T); Meas.: T10E00NA.PS; Date: 010501


www.ps.bam.de/DE14/10T/T10E00NA.PS

i	LAB*ref	LAB*out, relative	LAB*out/c-ref	ΔE^*
1	36.07 -5.1 -43.83	36.07 -5.1 -43.83	0.0 0.0 0.0	0.01
2	39.97 -4.75 -40.76	36.95 -5.02 -43.14	-3.01 -0.26 -2.37	3.85
3	43.87 -4.41 -37.69	40.56 -4.7 -40.3	-3.3 -0.29 -2.6	4.23
4	47.78 -4.06 -34.62	45.3 -4.28 -36.57	-2.47 -0.21 -1.94	3.16
5	51.68 -3.71 -31.56	49.98 -3.86 -32.89	-1.69 -0.14 -1.33	2.17
6	55.58 -3.36 -28.49	53.42 -3.56 -30.19	-2.15 -0.18 -1.69	2.76
7	59.48 -3.02 -25.42	57.13 -3.22 -27.26	-2.34 -0.2 -1.84	2.99
8	63.38 -2.67 -22.35	61.35 -2.85 -23.95	-2.02 -0.17 -1.59	2.59
9	67.29 -2.32 -19.28	66.1 -2.43 -20.21	-1.17 -0.1 -0.92	1.51
10	71.19 -1.97 -16.21	70.19 -2.06 -17.0	-0.99 -0.08 -0.78	1.27
11	75.09 -1.63 -13.14	74.83 -1.65 -13.35	-0.25 -0.01 -0.2	0.34
12	78.99 -1.28 -10.07	78.95 -1.28 -10.1	-0.03 0.0 -0.02	0.05
13	82.89 -0.93 -7.01	82.91 -0.93 -7.0	0.01 0.0 0.01	0.02
14	86.8 -0.58 -3.94	87.74 -0.5 -3.2	0.94 0.08 0.74	1.2
15	90.7 -0.24 -0.87	92.06 -0.12 0.2	1.37 0.12 1.07	1.74
16	94.6 0.1 2.19	94.6 0.1 2.19	0.0 0.0 0.0	0.01
17	36.07 -5.1 -43.83	36.07 -5.1 -43.83	0.0 0.0 0.0	0.01
18	50.7 -3.8 -32.32	48.81 -3.97 -33.81	-1.88 -0.16 -1.48	2.41
19	65.34 -2.5 -20.82	63.73 -2.64 -22.08	-1.6 -0.13 -1.25	2.05
20	79.97 -1.19 -9.31	79.94 -1.19 -9.33	-0.01 0.0 -0.01	0.03
21	94.6 0.1 2.19	94.6 0.1 2.19	0.0 0.0 0.0	0.01
Mean colour reproduction index: $R^*_{ab,m} = 93$				

Linearized output S2
Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 94.6 - 36.07$
Regularity
 $g^* = 78.6$
Lightness gamut rel. to offset
 $f^* = 75.6$
 ΔL^* -gray variation
 $v^* = 0.0$
Mean CIELAB difference (16 steps)
 $\Delta E^*_{CIELAB} = 1.7$
Mean CIELAB difference (5 steps)
 $\Delta L^*_{CIELAB} = 0.9$

Device: (T); Meas.: T10E00FA.PS; Date: 010501

www.ps.bam.de/DE14/10T/T10E00FA.PS

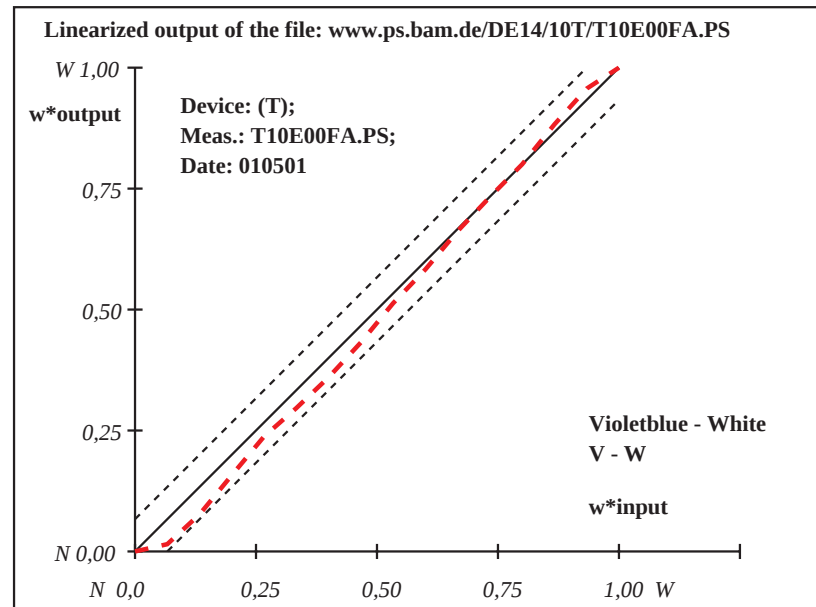

Device: (T); Meas.: T10E00FA.PS; Date: 010501


www.ps.bam.de/DE14/10T/T10E00FA.PS

i	LAB*ref	LAB*out, relative	LAB*out/c-ref	ΔE^*
1	11.72 -0.85 3.17	11.72 -0.85 3.17	0.0 0.0 0.0	0.01
2	17.36 -0.77 3.1	15.0 -0.8 3.13	-2.34 -0.02 0.03	2.35
3	22.99 -0.69 3.02	22.72 -0.69 3.03	-0.27 0.0 0.0	0.28
4	28.63 -0.61 2.95	30.67 -0.58 2.92	2.04 0.03 -0.02	2.04
5	34.27 -0.52 2.88	36.0 -0.5 2.85	1.74 0.03 -0.01	1.74
6	39.9 -0.44 2.8	41.5 -0.42 2.78	1.6 0.02 -0.01	1.6
7	45.54 -0.36 2.73	46.02 -0.36 2.72	0.48 0.01 0.0	0.48
8	51.18 -0.28 2.66	54.57 -0.23 2.61	3.39 0.05 -0.03	3.39
9	56.81 -0.2 2.58	57.82 -0.18 2.57	1.0 0.01 0.0	1.0
10	62.45 -0.12 2.51	66.08 -0.07 2.46	3.63 0.05 -0.04	3.63
11	68.09 -0.04 2.44	72.78 0.02 2.38	4.69 0.07 -0.05	4.69
12	73.72 0.03 2.36	81.19 0.14 2.27	7.47 0.11 -0.09	7.47
13	79.36 0.12 2.29	87.48 0.23 2.18	8.12 0.12 -0.1	8.12
14	85.0 0.2 2.22	91.94 0.3 2.13	6.94 0.1 -0.08	6.94
15	90.63 0.28 2.14	95.36 0.35 2.08	4.73 0.07 -0.05	4.73
16	96.27 0.36 2.07	96.27 0.36 2.07	0.0 0.0 0.0	0.01
17	11.72 -0.85 3.17	11.72 -0.85 3.17	0.0 0.0 0.0	0.01
18	32.86 -0.55 2.9	34.67 -0.52 2.87	1.81 0.03 -0.01	1.81
19	54.0 -0.24 2.62	56.19 -0.21 2.59	2.2 0.03 -0.02	2.2
20	75.13 0.06 2.35	82.76 0.17 2.25	7.63 0.11 -0.09	7.63
21	96.27 0.36 2.07	96.27 0.36 2.07	0.0 0.0 0.0	0.01

Start output S1
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 96.27 - 11.72$
Regularity
 $g^* = 50.8$
Lightness gamut rel. to offset
 $f^* = 109.2$
 ΔL^* -gray variation
 $v^* = 0.0$
Mean CIELAB difference (16 steps)
 $\Delta E^*_{CIELAB} = 3.0$
Mean CIELAB difference (5 steps)
 $\Delta L^*_{CIELAB} = 2.3$
Mean colour reproduction index: $R^*_{ab,m} = 87$

Device: (T); Meas.: T10E00NA.PS; Date: 010501

www.ps.bam.de/DE14/10T/T10E00NA.PS

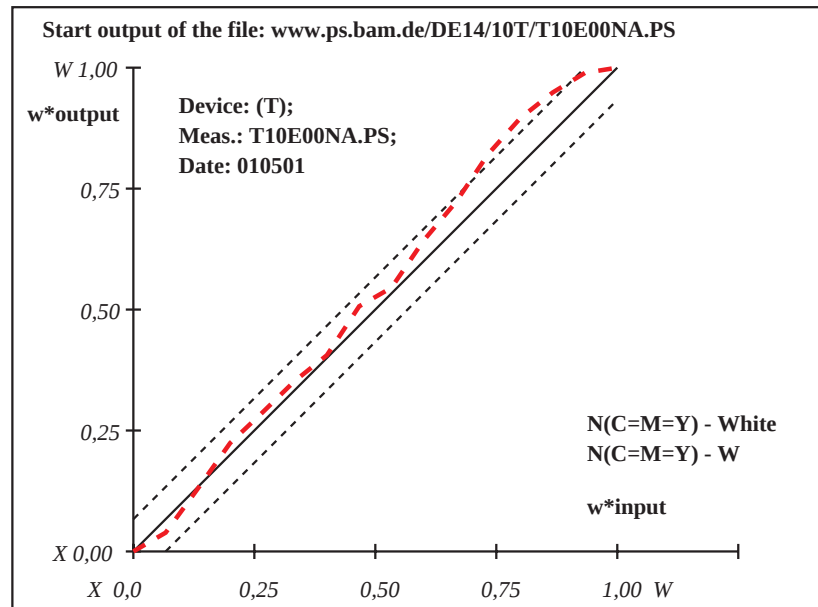

Device: (T); Meas.: T10E00NA.PS; Date: 010501


www.ps.bam.de/DE14/10T/T10E00NA.PS

i	LAB*ref	LAB*out, relative	LAB*out/c-ref	ΔE^*
1	11.74 -2.74 6.02	11.74 -2.74 6.02	0.0 0.0 0.0	0.01
2	17.3 -2.55 5.77	16.55 -2.58 5.8	-0.74 -0.02 0.03	0.75
3	22.86 -2.36 5.51	23.61 -2.34 5.48	0.74 0.03 -0.02	0.75
4	28.43 -2.17 5.26	28.11 -2.18 5.27	-0.3 0.0 0.01	0.31
5	33.99 -1.99 5.0	34.48 -1.97 4.98	0.49 0.02 -0.01	0.49
6	39.55 -1.8 4.75	40.54 -1.76 4.7	0.99 0.03 -0.04	0.99
7	45.11 -1.61 4.5	45.09 -1.61 4.5	-0.01 0.0 0.0	0.02
8	50.67 -1.42 4.24	50.91 -1.41 4.23	0.24 0.01 0.0	0.24
9	56.24 -1.23 3.99	55.78 -1.25 4.01	-0.44 -0.01 0.02	0.45
10	61.8 -1.04 3.73	61.81 -1.04 3.73	0.01 0.0 0.0	0.01
11	67.36 -0.85 3.48	66.43 -0.88 3.52	-0.92 -0.02 0.04	0.93
12	72.92 -0.66 3.23	74.47 -0.61 3.16	1.54 0.05 -0.06	1.55
13	78.48 -0.48 2.97	78.51 -0.48 2.97	0.03 0.0 0.0	0.03
14	84.05 -0.29 2.72	84.28 -0.28 2.71	0.23 0.01 0.0	0.23
15	89.61 -0.1 2.46	89.64 -0.1 2.46	0.03 0.0 0.0	0.04
16	95.17 0.08 2.21	95.17 0.08 2.21	0.0 0.0 0.0	0.01
17	11.74 -2.74 6.02	11.74 -2.74 6.02	0.0 0.0 0.0	0.01
18	32.6 -2.03 5.07	32.89 -2.02 5.05	0.29 0.01 0.0	0.29
19	53.46 -1.33 4.11	53.35 -1.33 4.12	-0.1 0.0 0.0	0.11
20	74.31 -0.62 3.16	75.48 -0.58 3.11	1.17 0.04 -0.04	1.17
21	95.17 0.08 2.21	95.17 0.08 2.21	0.0 0.0 0.0	0.01

Linearized output S2
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 95.17 - 11.74$
Regularity
 $g^* = 89.0$
Lightness gamut rel. to offset
 $f^* = 107.8$
 ΔL^* -gray variation
 $v^* = 0.0$
Mean CIELAB difference (16 steps)
 $\Delta E^*_{CIELAB} = 0.4$
Mean CIELAB difference (5 steps)
 $\Delta L^*_{CIELAB} = 0.3$
Mean colour reproduction index: $R^*_{ab,m} = 98$

Device: (T); Meas.: T10E00FA.PS; Date: 010501

www.ps.bam.de/DE14/10T/T10E00FA.PS

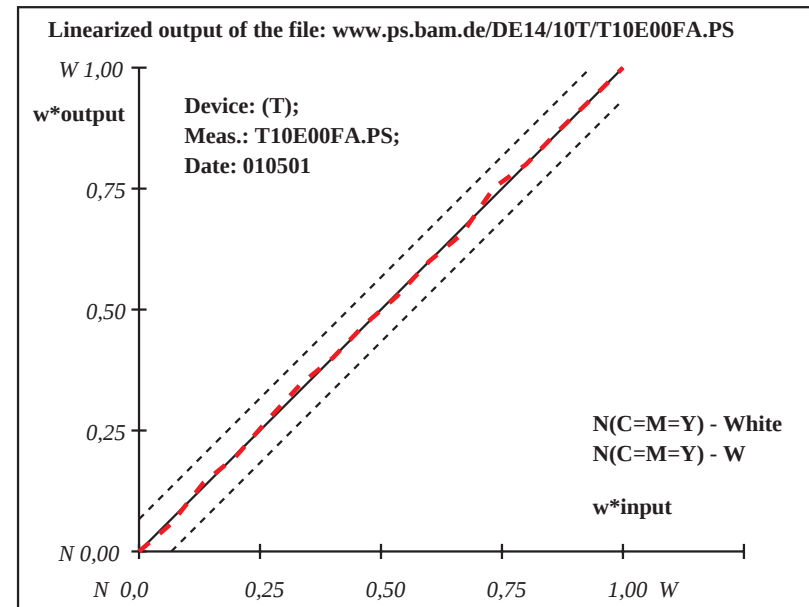

Device: (T); Meas.: T10E00FA.PS; Date: 010501

www.ps.bam.de/DE14/10T/T10E00FA.PS

Output linearization of 16 colour steps according to ISO/IEC 15775; PS operator cmyn* setcmykcolor