


i	LAB*ref	LAB*out, relative	LAB*out/c-ref	ΔE^*	Start output S1
1	53.44 -34.15 -45.18	53.44 -34.15 -45.18	0.0 0.0 0.0	0.01	Specification according to
2	56.29 -31.88 -42.0	53.69 -33.95 -44.9	-2.59 -2.06 -2.89	4.41	ISO/IEC 15775 Annex G
3	59.15 -29.62 -38.82	53.94 -33.75 -44.62	-5.19 -4.12 -5.79	8.82	and DIN 33866-1 Annex G
4	62.0 -27.35 -35.64	54.52 -33.29 -43.97	-7.47 -5.93 -8.32	12.68	relative CIELAB data used for "out"
5	64.86 -25.08 -32.46	55.35 -32.64 -43.06	-9.5 -7.54 -10.59	16.12	$\Delta L^* = 96.25 - 53.44$
6	67.71 -22.82 -29.28	56.87 -31.43 -41.36	-10.83 -8.6 -12.07	18.37	Regularity
7	70.56 -20.55 -26.1	59.3 -29.5 -38.65	-11.26 -8.94 -12.54	19.09	$g^* = 8.9$
8	73.42 -18.28 -22.92	62.43 -27.01 -35.16	-10.97 -8.71 -12.23	18.62	
9	76.27 -16.02 -19.74	65.26 -24.77 -32.01	-11.01 -8.74 -12.26	18.67	Lightness gamut rel. to offset
10	79.13 -13.75 -16.56	68.43 -22.25 -28.48	-10.69 -8.49 -11.91	18.13	$f^* = 55.3$
11	81.98 -11.48 -13.38	71.76 -19.6 -24.76	-10.21 -8.1 -11.37	17.31	
12	84.83 -9.22 -10.2	75.63 -16.53 -20.45	-9.19 -7.3 -10.24	15.6	ΔL^* -gray variation
13	87.69 -6.95 -7.02	81.29 -12.03 -14.14	-6.38 -5.07 -7.11	10.84	$v^* = 0.0$
14	90.54 -4.68 -3.84	86.65 -7.77 -8.17	-3.88 -3.08 -4.32	6.59	
15	93.4 -2.42 -0.66	90.77 -4.5 -3.58	-2.61 -2.07 -2.91	4.44	Mean CIELAB difference (16 steps)
16	96.25 -0.15 2.51	96.25 -0.15 2.51	0.0 0.0 0.0	0.01	$\Delta E^*_{\text{CIELAB}} = 11.9$
17	53.44 -34.15 -45.18	53.44 -34.15 -45.18	0.0 0.0 0.0	0.01	
18	64.14 -25.65 -33.26	55.14 -32.8 -43.29	-8.99 -7.14 -10.02	15.26	
19	74.85 -17.15 -21.33	63.84 -25.89 -33.59	-10.99 -8.73 -12.25	18.64	
20	85.55 -8.65 -9.41	77.05 -15.4 -18.88	-8.49 -6.74 -9.46	14.41	Mean CIELAB difference (5 steps)
21	96.25 -0.15 2.51	96.25 -0.15 2.51	0.0 0.0 0.0	0.01	$\Delta L^*_{\text{CIELAB}} = 9.7$
Mean colour reproduction index: $R^*_{\text{ab,m}} = 48$					

Device: (T); Meas.: T10E00NP.PS; Date: 010501

www.ps.bam.de/DE14/10T/T10E00NP.PS

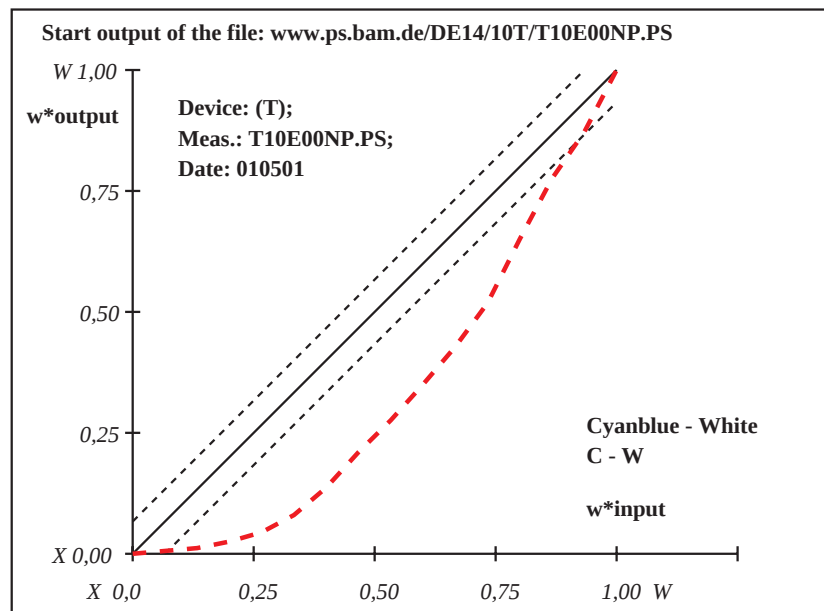

Device: (T); Meas.: T10E00NP.PS; Date: 010501


www.ps.bam.de/DE14/10T/T10E00NP.PS

Output linearization of 16 colour steps according to ISO/IEC 15775; PS operator cmyn* setcmykcolor

i	LAB*ref	LAB*out, relative	LAB*out/c-ref	ΔE^*	Linearized output S2
1	54.81 -34.37 -44.16	54.81 -34.37 -44.16	0.0 0.0 0.0	0.01	Specification according to
2	57.56 -32.09 -41.05	57.12 -32.46 -41.55	-0.43 -0.35 -0.49	0.76	ISO/IEC 15775 Annex G
3	60.32 -29.82 -37.94	60.7 -29.5 -37.5	0.39 0.32 0.44	0.67	and DIN 33866-1 Annex G
4	63.07 -27.54 -34.83	62.68 -27.86 -35.27	-0.38 -0.31 -0.43	0.67	relative CIELAB data used for "out"
5	65.82 -25.26 -31.71	65.21 -25.77 -32.41	-0.61 -0.5 -0.69	1.06	$\Delta L^* = 96.11 - 54.81$
6	68.58 -22.99 -28.6	68.07 -23.41 -29.18	-0.5 -0.41 -0.56	0.87	Regularity
7	71.33 -20.71 -25.49	70.7 -21.23 -26.2	-0.62 -0.51 -0.7	1.08	$g^* = 76.5$
8	74.08 -18.43 -22.38	72.64 -19.63 -24.01	-1.43 -1.18 -1.62	2.48	
9	76.84 -16.16 -19.27	75.3 -17.42 -21.0	-1.52 -1.26 -1.72	2.64	Lightness gamut rel. to offset
10	79.59 -13.88 -16.16	77.92 -15.26 -18.05	-1.66 -1.37 -1.88	2.88	$f^* = 53.4$
11	82.34 -11.6 -13.05	80.57 -13.07 -15.05	-1.76 -1.45 -1.99	3.05	
12	85.1 -9.33 -9.94	82.99 -11.07 -12.31	-2.09 -1.73 -2.37	3.62	ΔL^* -gray variation
13	87.85 -7.05 -6.82	86.33 -8.3 -8.54	-1.51 -1.24 -1.7	2.61	$v^* = 0.0$
14	90.6 -4.77 -3.71	89.26 -5.89 -5.24	-1.34 -1.1 -1.51	2.32	
15	93.36 -2.5 -0.6	91.95 -3.66 -2.19	-1.39 -1.15 -1.57	2.41	Mean CIELAB difference (16 steps)
16	96.11 -0.22 2.5	96.11 -0.22 2.5	0.0 0.0 0.0	0.01	$\Delta E^*_{\text{CIELAB}} = 1.7$
17	54.81 -34.37 -44.16	54.81 -34.37 -44.16	0.0 0.0 0.0	0.01	
18	65.14 -25.83 -32.49	64.58 -26.29 -33.12	-0.55 -0.45 -0.62	0.96	
19	75.46 -17.3 -20.83	73.97 -18.53 -22.51	-1.48 -1.22 -1.67	2.56	
20	85.79 -8.76 -9.16	83.83 -10.38 -11.37	-1.95 -1.61 -2.2	3.37	Mean CIELAB difference (5 steps)
21	96.11 -0.22 2.5	96.11 -0.22 2.5	0.0 0.0 0.0	0.01	$\Delta L^*_{\text{CIELAB}} = 1.4$
Mean colour reproduction index: $R^*_{\text{ab,m}} = 93$					

Device: (T); Meas.: T10E00FP.PS; Date: 010501

www.ps.bam.de/DE14/10T/T10E00FP.PS

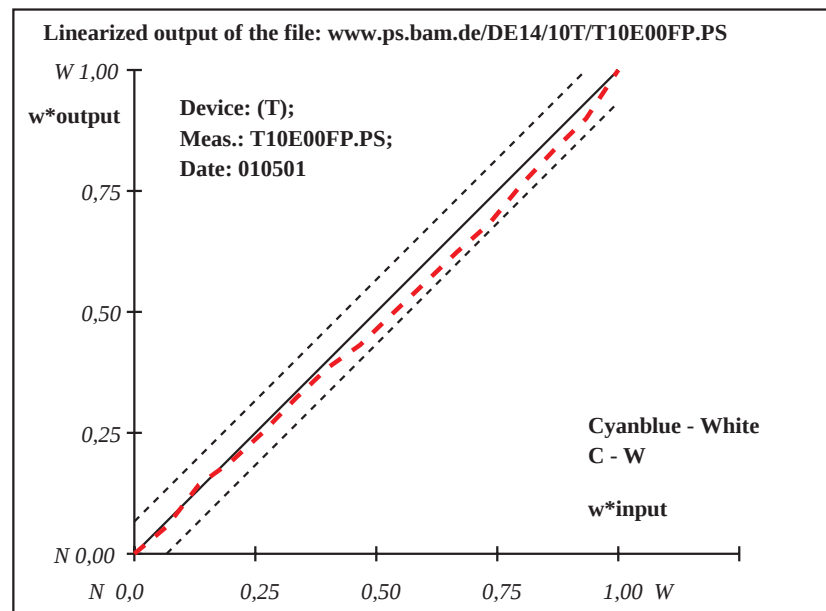

Device: (T); Meas.: T10E00FP.PS; Date: 010501


www.ps.bam.de/DE14/10T/T10E00FP.PS

i	LAB*ref	LAB*out, relative	LAB*out/c-ref	ΔE^*
1	42.71 78.01 0.28	42.71 78.01 0.28	0.0 0.0 0.0	0.01
2	46.28 72.79 0.44	43.06 77.49 0.3	-3.21 4.7 -0.14	5.7
3	49.85 67.58 0.6	43.95 76.2 0.34	-5.89 8.62 -0.26	10.46
4	53.43 62.36 0.77	44.04 76.06 0.34	-9.37 13.7 -0.42	16.61
5	57.0 57.14 0.93	45.31 74.21 0.4	-11.67 17.07 -0.52	20.69
6	60.57 51.92 1.09	47.01 71.73 0.48	-13.55 19.8 -0.6	24.01
7	64.14 46.71 1.25	50.17 67.11 0.62	-13.96 20.41 -0.62	24.74
8	67.71 41.49 1.41	54.45 60.86 0.81	-13.26 19.38 -0.59	23.49
9	71.29 36.27 1.58	57.79 55.99 0.96	-13.49 19.71 -0.6	23.9
10	74.86 31.05 1.74	61.3 50.86 1.12	-13.55 19.81 -0.61	24.01
11	78.43 25.84 1.9	66.62 43.08 1.36	-11.8 17.25 -0.53	20.91
12	82.0 20.62 2.06	71.46 36.01 1.58	-10.53 15.39 -0.47	18.66
13	85.57 15.4 2.22	78.79 25.31 1.92	-6.77 9.9 -0.3	12.01
14	89.15 10.18 2.39	85.05 16.16 2.2	-4.08 5.98 -0.18	7.25
15	92.72 4.97 2.55	90.04 8.89 2.43	-2.67 3.92 -0.11	4.75
16	96.29 -0.24 2.71	96.29 -0.24 2.71	0.0 0.0 0.0	0.01
17	42.71 78.01 0.28	42.71 78.01 0.28	0.0 0.0 0.0	0.01
18	56.11 58.45 0.89	45.0 74.67 0.38	-11.1 16.23 -0.49	19.67
19	69.5 38.88 1.5	56.12 58.42 0.89	-13.37 19.54 -0.6	23.69
20	82.9 19.32 2.1	73.3 33.33 1.67	-9.59 14.02 -0.43	17.0
21	96.29 -0.24 2.71	96.29 -0.24 2.71	0.0 0.0 0.0	0.01
Mean colour reproduction index: $R^*_{ab,m} = 35$				

Start output S1
Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 96.29 - 42.71$
Regularity
 $g^* = 9.9$
Lightness gamut rel. to offset
 $f^* = 69.2$
 ΔL^* -gray variation
 $v^* = 0.0$
Mean CIELAB difference (16 steps)
 $\Delta E^*_{CIELAB} = 14.8$
Mean CIELAB difference (5 steps)
 $\Delta L^*_{CIELAB} = 12.1$

Device: (T); Meas.: T10E00NP.PS; Date: 010501

www.ps.bam.de/DE14/10T/T10E00NP.PS

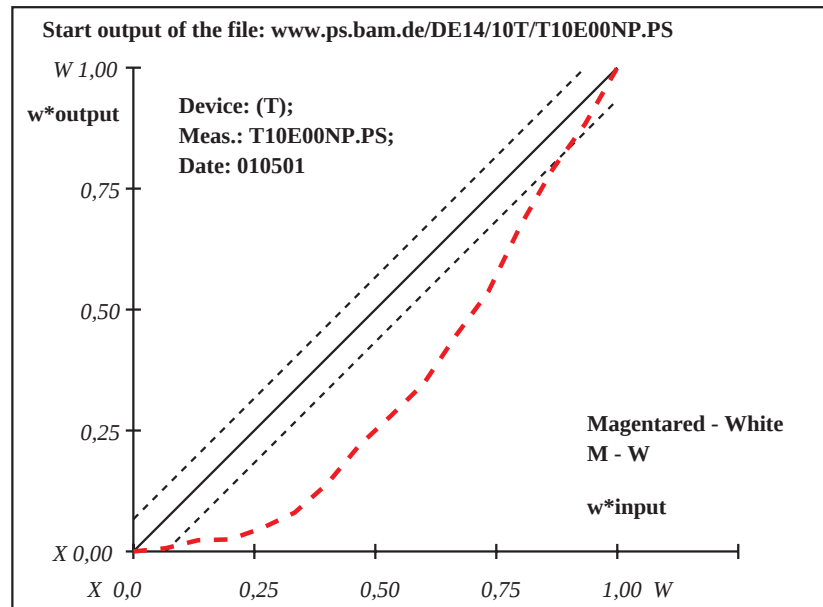

Device: (T); Meas.: T10E00NP.PS; Date: 010501


www.ps.bam.de/DE14/10T/T10E00NP.PS

i	LAB*ref	LAB*out, relative	LAB*out/c-ref	ΔE^*
1	42.93 78.08 -1.34	42.93 78.08 -1.34	0.0 0.0 0.0	0.01
2	46.47 72.86 -1.08	46.85 72.31 -1.06	0.37 -0.54 0.03	0.67
3	50.02 67.65 -0.83	50.49 66.95 -0.79	0.47 -0.69 0.03	0.85
4	53.56 62.43 -0.57	53.49 62.53 -0.58	-0.06 0.1 0.0	0.13
5	57.1 57.21 -0.32	57.01 57.34 -0.32	-0.08 0.13 0.0	0.15
6	60.64 52.0 -0.06	60.64 52.0 -0.06	0.0 0.01 0.0	0.01
7	64.19 46.78 0.19	63.9 47.2 0.17	-0.28 0.42 -0.01	0.51
8	67.73 41.56 0.44	67.65 41.67 0.44	-0.06 0.11 0.0	0.13
9	71.27 36.35 0.7	69.65 38.74 0.58	-1.62 2.39 -0.11	2.9
10	74.81 31.13 0.95	73.17 33.55 0.84	-1.63 2.42 -0.11	2.93
11	78.36 25.91 1.21	76.03 29.35 1.04	-2.32 3.43 -0.16	4.15
12	81.9 20.7 1.47	78.58 25.58 1.23	-3.31 4.89 -0.23	5.91
13	85.44 15.48 1.72	82.62 19.63 1.52	-2.81 4.15 -0.19	5.02
14	88.98 10.26 1.98	87.59 12.32 1.88	-1.39 2.06 -0.09	2.49
15	92.53 5.05 2.23	91.12 7.11 2.13	-1.39 2.07 -0.09	2.5
16	96.07 -0.16 2.49	96.07 -0.16 2.49	0.0 0.0 0.0	0.01
17	42.93 78.08 -1.34	42.93 78.08 -1.34	0.0 0.0 0.0	0.01
18	56.22 58.52 -0.38	56.13 58.64 -0.39	-0.07 0.12 0.0	0.15
19	69.5 38.96 0.57	68.65 40.21 0.51	-0.84 1.25 -0.05	1.52
20	82.79 19.39 1.53	79.59 24.09 1.3	-3.18 4.7 -0.22	5.69
21	96.07 -0.16 2.49	96.07 -0.16 2.49	0.0 0.0 0.0	0.01
Mean colour reproduction index: $R^*_{ab,m} = 92$				

Linearized output S2
Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 96.07 - 42.93$
Regularity
 $g^* = 66.4$
Lightness gamut rel. to offset
 $f^* = 68.7$
 ΔL^* -gray variation
 $v^* = 0.0$
Mean CIELAB difference (16 steps)
 $\Delta E^*_{CIELAB} = 1.8$
Mean CIELAB difference (5 steps)
 $\Delta L^*_{CIELAB} = 1.5$

Device: (T); Meas.: T10E00FP.PS; Date: 010501

www.ps.bam.de/DE14/10T/T10E00FP.PS

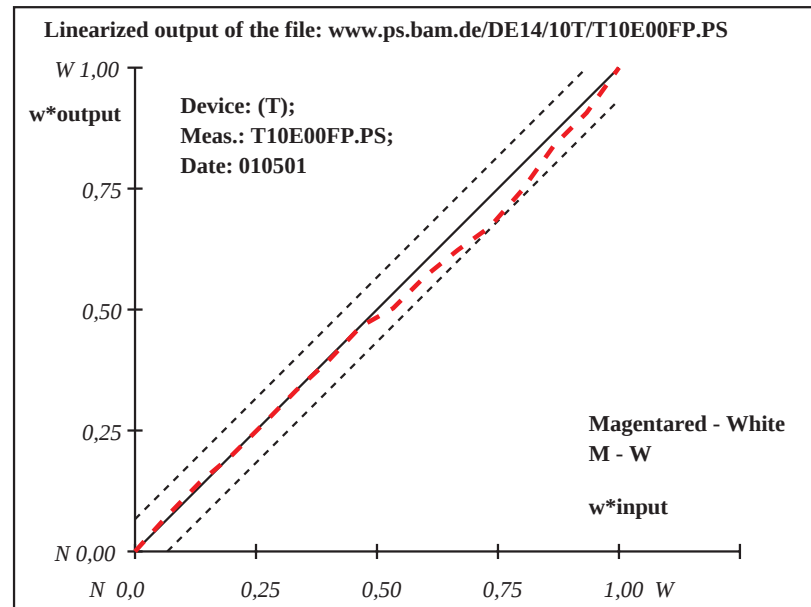

Device: (T); Meas.: T10E00FP.PS; Date: 010501


www.ps.bam.de/DE14/10T/T10E00FP.PS

i	LAB*ref	LAB*out, relative	LAB*out/c-ref	ΔE^*
1	90.32 -16.73	106.88 90.32 -16.73 106.88	0.0 0.0 0.0	0.01
2	90.72 -15.62	99.93 90.33 -16.71 106.77	-0.38 -1.08 6.84	6.94
3	91.11 -14.51	92.97 90.33 -16.7 106.69	-0.77 -2.18 13.72	13.91
4	91.51 -13.4	86.02 90.4 -16.51 105.49	-1.1 -3.1 19.47	19.75
5	91.9 -12.29	79.07 90.64 -15.84 101.33	-1.26 -3.54 22.26	22.58
6	92.3 -11.18	72.11 90.94 -14.98 95.93	-1.35 -3.79 23.82	24.16
7	92.7 -10.07	65.16 91.44 -13.6 87.29	-1.25 -3.52 22.13	22.44
8	93.09 -8.96	58.21 91.94 -12.2 78.51	-1.15 -3.23 20.31	20.6
9	93.49 -7.86	51.25 92.35 -11.03 71.18	-1.12 -3.17 19.92	20.21
10	93.88 -6.75	44.3 92.7 -10.05 65.0	-1.17 -3.29 20.7	21.0
11	94.28 -5.64	37.35 93.27 -8.46 55.02	-1.0 -2.81 17.67	17.93
12	94.68 -4.53	30.39 93.79 -7.01 45.95	-0.88 -2.47 15.55	15.78
13	95.07 -3.42	23.44 94.61 -4.7 31.47	-0.45 -1.27 8.03	8.15
14	95.47 -2.31	16.49 95.17 -3.15 21.75	-0.29 -0.83 5.26	5.34
15	95.86 -1.2	9.53 95.68 -1.71 12.76	-0.17 -0.51 3.23	3.28
16	96.26 -0.09	2.58 96.26 -0.09 2.58	0.0 0.0 0.0	0.01
17	90.32 -16.73	106.88 90.32 -16.73 106.88	0.0 0.0 0.0	0.01
18	91.81 -12.57	80.81 90.58 -16.01 102.37	-1.22 -3.43 21.56	21.87
19	93.29 -8.41	54.73 92.14 -11.62 74.85	-1.14 -3.2 20.12	20.4
20	94.78 -4.25	28.66 94.0 -6.43 42.33	-0.77 -2.17 13.67	13.87
21	96.26 -0.09	2.58 96.26 -0.09 2.58	0.0 0.0 0.0	0.01

Start output S1
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 96.26 - 90.32$
Regularity
 $g^* = 11.4$
Lightness gamut rel. to offset
 $f^* = 7.7$
 ΔL^* -gray variation
 $v^* = 0.0$
Mean CIELAB difference (16 steps)
 $\Delta E^*_{CIELAB} = 13.9$
Mean CIELAB difference (5 steps)
 $\Delta L^*_{CIELAB} = 11.2$
Mean colour reproduction index: $R^*_{ab,m} = 39$

Device: (T); Meas.: T10E00NP.PS; Date: 010501

www.ps.bam.de/DE14/10T/T10E00NP.PS

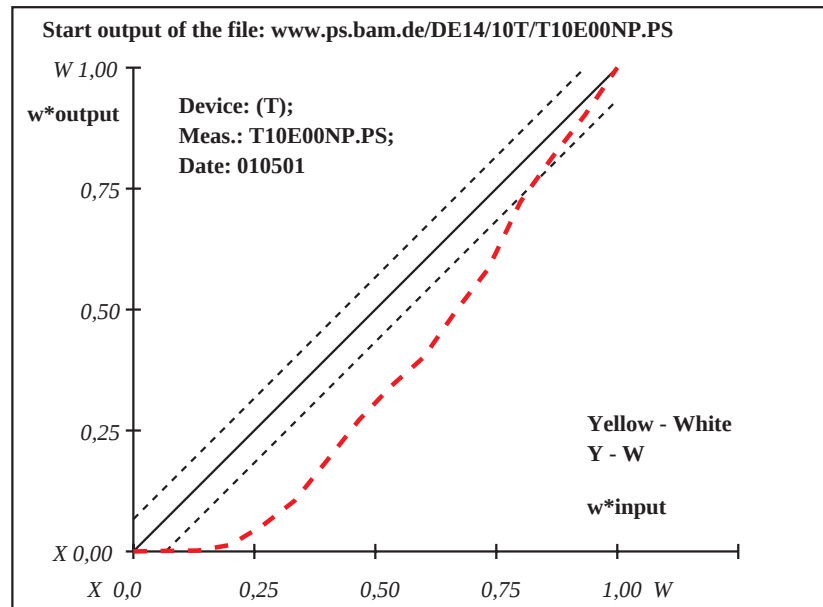

Device: (T); Meas.: T10E00NP.PS; Date: 010501


www.ps.bam.de/DE14/10T/T10E00NP.PS

i	LAB*ref	LAB*out, relative	LAB*out/c-ref	ΔE^*
1	90.32 -16.23	108.46 90.32 -16.23 108.46	0.0 0.0 0.0	0.01
2	90.7 -15.16	101.4 90.67 -15.24 101.89	-0.02 -0.06 0.49	0.5
3	91.08 -14.1	94.34 90.99 -14.35 96.03	-0.08 -0.25 1.69	1.72
4	91.46 -13.03	87.28 91.53 -12.85 86.1	0.06 0.18 -1.16	1.19
5	91.84 -11.96	80.21 91.87 -11.89 79.76	0.02 0.07 -0.45	0.46
6	92.22 -10.9	73.15 92.07 -11.31 75.91	-0.14 -0.41 2.75	2.79
7	92.6 -9.83	66.09 92.41 -10.38 69.7	-0.18 -0.54 3.61	3.66
8	92.98 -8.76	59.03 92.74 -9.45 63.58	-0.24 -0.68 4.55	4.61
9	93.37 -7.7	51.97 93.14 -8.34 56.24	-0.22 -0.63 4.27	4.32
10	93.75 -6.63	44.91 93.47 -7.41 50.1	-0.27 -0.77 5.19	5.26
11	94.13 -5.56	37.85 93.98 -5.97 40.52	-0.13 -0.39 2.67	2.7
12	94.51 -4.5	30.79 94.16 -5.46 37.18	-0.33 -0.96 6.39	6.48
13	94.89 -3.43	23.72 94.59 -4.26 29.24	-0.29 -0.82 5.51	5.58
14	95.27 -2.36	16.66 95.06 -2.95 20.57	-0.2 -0.58 3.9	3.95
15	95.65 -1.3	9.6 95.52 -1.65 11.92	-0.12 -0.34 2.32	2.35
16	96.03 -0.23	2.54 96.03 -0.23 2.54	0.0 0.0 0.0	0.01
17	90.32 -16.23	108.46 90.32 -16.23 108.46	0.0 0.0 0.0	0.01
18	91.75 -12.23	81.98 91.78 -12.13 81.34	0.03 0.1 -0.63	0.64
19	93.18 -8.23	55.5 92.94 -8.9 59.91	-0.23 -0.66 4.41	4.47
20	94.6 -4.23	29.02 94.27 -5.16 35.19	-0.32 -0.92 6.17	6.25
21	96.03 -0.23	2.54 96.03 -0.23 2.54	0.0 0.0 0.0	0.01

Linearized output S2
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 96.03 - 90.32$
Regularity
 $g^* = 65.6$
Lightness gamut rel. to offset
 $f^* = 7.4$
 ΔL^* -gray variation
 $v^* = 0.0$
Mean CIELAB difference (16 steps)
 $\Delta E^*_{CIELAB} = 2.8$
Mean CIELAB difference (5 steps)
 $\Delta L^*_{CIELAB} = 2.3$
Mean colour reproduction index: $R^*_{ab,m} = 88$

Device: (T); Meas.: T10E00FP.PS; Date: 010501

www.ps.bam.de/DE14/10T/T10E00FP.PS

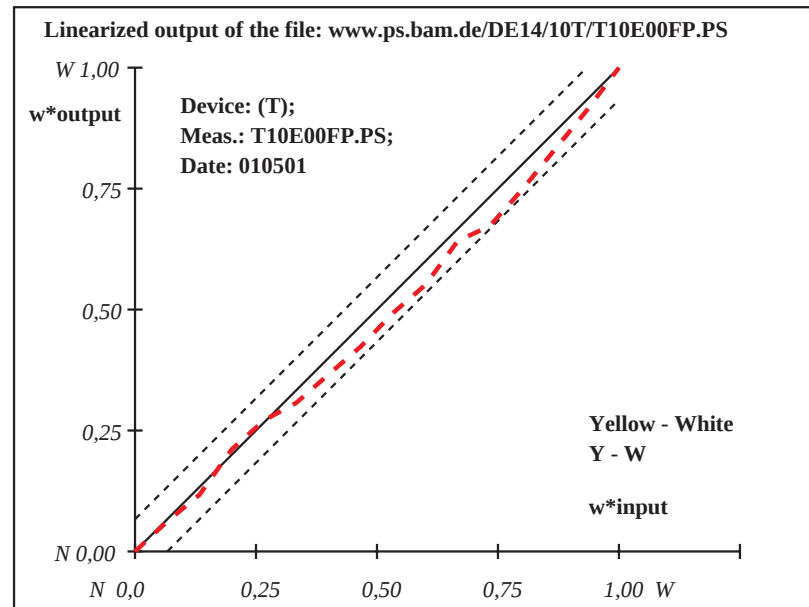

Device: (T); Meas.: T10E00FP.PS; Date: 010501


www.ps.bam.de/DE14/10T/T10E00FP.PS

Output linearization of 16 colour steps according to ISO/IEC 15775; PS operator cmyn* setcmykcolor

i	LAB*ref			LAB*out, relative			LAB*out/c-ref			ΔE^*	Start output S1 Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G relative CIELAB data used for "out" $\Delta L^* = 96.18 - 16.56$ Regularity $g^* = 25.1$ Lightness gamut rel. to offset $f^* = 102.9$ ΔL^* -gray variation $v^* = 0.0$ Mean CIELAB difference (16 steps) $\Delta E^{*CIELAB} = 5.5$ Mean CIELAB difference (5 steps) $\Delta L^{*CIELAB} = 4.4$ Mean colour reproduction index: $R^*_{ab,m} = 76$
1	16.56	-1.41	2.07	16.56	-1.41	2.07	0.0	0.0	0.0	0.01	
2	21.87	-1.33	2.11	17.48	-1.4	2.08	-4.38	-0.06	-0.02	4.39	
3	27.18	-1.25	2.14	17.9	-1.39	2.08	-9.27	-0.13	-0.06	9.28	
4	32.48	-1.17	2.18	18.21	-1.39	2.08	-14.27	-0.21	-0.09	14.28	
5	37.79	-1.09	2.22	24.83	-1.29	2.13	-12.95	-0.19	-0.08	12.96	
6	43.1	-1.01	2.26	31.95	-1.18	2.18	-11.14	-0.16	-0.07	11.15	
7	48.41	-0.93	2.29	40.71	-1.05	2.24	-7.69	-0.11	-0.04	7.7	
8	53.72	-0.85	2.33	46.47	-0.96	2.28	-7.24	-0.1	-0.04	7.25	
9	59.02	-0.77	2.37	52.65	-0.87	2.32	-6.36	-0.09	-0.03	6.37	
10	64.33	-0.69	2.41	58.46	-0.78	2.36	-5.86	-0.08	-0.03	5.87	
11	69.64	-0.61	2.44	65.0	-0.68	2.41	-4.63	-0.06	-0.02	4.64	
12	74.95	-0.53	2.48	72.39	-0.57	2.46	-2.54	-0.03	-0.01	2.55	
13	80.26	-0.45	2.52	79.5	-0.46	2.51	-0.75	0.0	0.0	0.76	
14	85.56	-0.37	2.56	85.17	-0.38	2.55	-0.38	0.0	0.0	0.39	
15	90.87	-0.29	2.59	89.81	-0.31	2.59	-1.05	-0.01	0.0	1.06	
16	96.18	-0.21	2.63	96.18	-0.21	2.63	0.0	0.0	0.0	0.01	
17	16.56	-1.41	2.07	16.56	-1.41	2.07	0.0	0.0	0.0	0.01	
18	36.47	-1.11	2.21	23.18	-1.31	2.12	-13.28	-0.19	-0.08	13.29	
19	56.37	-0.81	2.35	49.56	-0.91	2.3	-6.8	-0.09	-0.04	6.81	
20	76.28	-0.51	2.49	74.17	-0.54	2.48	-2.09	-0.02	0.0	2.11	
21	96.18	-0.21	2.63	96.18	-0.21	2.63	0.0	0.0	0.0	0.01	

Device: (T); Meas.: T10E00NP.PS; Date: 010501

www.ps.bam.de/DE14/10T/T10E00NP.PS

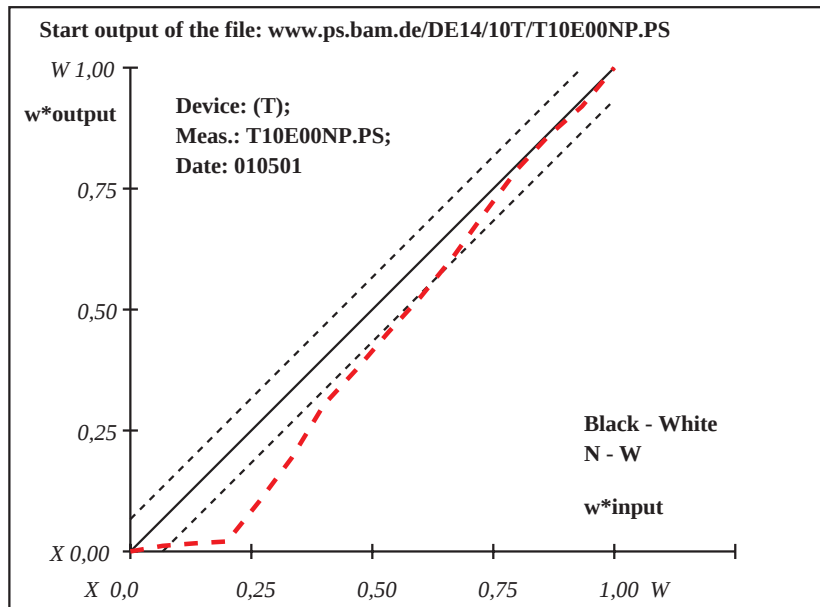


Device: (T); Meas.: T10E00NP.PS; Date: 010501

www.ps.bam.de/DE14/10T/T10E00NP.PS

i	LAB*ref			LAB*out, relative			LAB*out/c-ref			ΔE^*	Linearized output S2 Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G relative CIELAB data used for "out" $\Delta L^* = 95.96 - 17.99$ Regularity $g^* = 72.2$ Lightness gamut rel. to offset $f^* = 100.7$ ΔL^* -gray variation $v^* = 0.0$ Mean CIELAB difference (16 steps) $\Delta E^{*CIELAB} = 2.1$ Mean CIELAB difference (5 steps) $\Delta L^{*CIELAB} = 1.8$ Mean colour reproduction index: $R^*_{ab,m} = 91$
1	17.99	-0.89	1.77	17.99	-0.89	1.77	0.0	0.0	0.0	0.01	
2	23.19	-0.85	1.82	22.4	-0.85	1.81	-0.78	0.0	0.0	0.79	
3	28.39	-0.8	1.87	27.01	-0.81	1.85	-1.37	0.0	0.0	1.38	
4	33.58	-0.76	1.91	30.51	-0.78	1.89	-3.07	-0.02	-0.02	3.08	
5	38.78	-0.71	1.96	38.01	-0.72	1.95	-0.76	0.0	0.0	0.77	
6	43.98	-0.67	2.01	42.55	-0.68	2.0	-1.42	0.0	0.0	1.43	
7	49.18	-0.62	2.06	47.21	-0.64	2.04	-1.96	-0.01	-0.01	1.97	
8	54.38	-0.58	2.11	50.59	-0.61	2.07	-3.77	-0.02	-0.02	3.78	
9	59.57	-0.53	2.15	55.64	-0.57	2.12	-3.92	-0.02	-0.03	3.93	
10	64.77	-0.49	2.2	61.42	-0.52	2.17	-3.34	-0.02	-0.02	3.35	
11	69.97	-0.44	2.25	68.06	-0.46	2.23	-1.9	-0.01	-0.01	1.92	
12	75.17	-0.4	2.3	70.78	-0.44	2.26	-4.38	-0.03	-0.03	4.39	
13	80.37	-0.35	2.35	77.46	-0.38	2.32	-2.9	-0.01	-0.02	2.91	
14	85.56	-0.31	2.39	83.29	-0.33	2.37	-2.26	-0.01	-0.01	2.27	
15	90.76	-0.26	2.44	89.53	-0.28	2.43	-1.22	0.0	0.0	1.23	
16	95.96	-0.22	2.49	95.96	-0.22	2.49	0.0	0.0	0.0	0.01	
17	17.99	-0.89	1.77	17.99	-0.89	1.77	0.0	0.0	0.0	0.01	
18	37.48	-0.72	1.95	36.14	-0.73	1.94	-1.34	0.0	0.0	1.35	
19	56.98	-0.56	2.13	53.12	-0.59	2.09	-3.85	-0.02	-0.03	3.86	
20	76.47	-0.39	2.31	72.45	-0.42	2.27	-4.01	-0.02	-0.03	4.02	
21	95.96	-0.22	2.49	95.96	-0.22	2.49	0.0	0.0	0.0	0.01	

Device: (T); Meas.: T10E00FP.PS; Date: 010501

www.ps.bam.de/DE14/10T/T10E00FP.PS

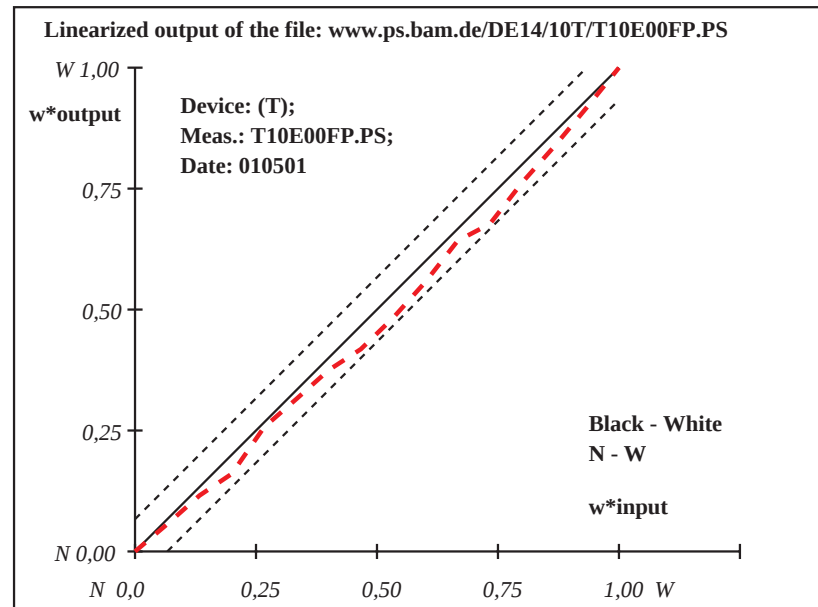

Device: (T); Meas.: T10E00FP.PS; Date: 010501


www.ps.bam.de/DE14/10T/T10E00FP.PS

Output linearization of 16 colour steps according to ISO/IEC 15775; PS operator cmyn* setcmykcolor

i	LAB*ref			LAB*out, relative			LAB*out/c-ref			ΔE^*	Start output S1 Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G relative CIELAB data used for "out" $\Delta L^* = 96.26 - 42.21$ Regularity $g^* = 8.4$ Lightness gamut rel. to offset $f^* = 69.8$ ΔL^* -gray variation $v^* = 0.0$ Mean CIELAB difference (16 steps) $\Delta E^{*CIELAB} = 15.3$ Mean CIELAB difference (5 steps) $\Delta L^{*CIELAB} = 12.6$ Mean colour reproduction index: $R^*_{ab,m} = 33$
1	42.21	65.82	52.84	42.21	65.82	52.84	0.0	0.0	0.0	0.01	
2	45.81	61.42	49.48	42.54	65.42	52.54	-3.27	4.0	3.05	6.0	
3	49.42	57.03	46.13	43.1	64.74	52.01	-6.31	7.71	5.88	11.57	
4	53.02	52.63	42.77	43.26	64.54	51.86	-9.75	11.91	9.09	17.88	
5	56.62	48.24	39.42	44.36	63.2	50.84	-12.25	14.96	11.42	22.47	
6	60.23	43.84	36.06	45.69	61.58	49.6	-14.53	17.74	13.54	26.63	
7	63.83	39.44	32.71	49.92	56.41	45.66	-13.9	16.97	12.95	25.48	
8	67.43	35.05	29.35	53.28	52.32	42.54	-14.15	17.27	13.18	25.93	
9	71.04	30.65	26.0	57.46	47.21	38.64	-13.56	16.56	12.64	24.86	
10	74.64	26.26	22.64	61.66	42.09	34.73	-12.97	15.84	12.09	23.78	
11	78.24	21.86	19.29	67.55	34.9	29.24	-10.68	13.04	9.95	19.58	
12	81.85	17.46	15.93	72.23	29.2	24.89	-9.61	11.73	8.95	17.62	
13	85.45	13.07	12.58	79.22	20.67	18.38	-6.22	7.6	5.8	11.41	
14	89.05	8.67	9.22	84.97	13.65	13.02	-4.07	4.98	3.8	7.47	
15	92.66	4.28	5.87	90.24	7.23	8.12	-2.41	2.95	2.25	4.43	
16	96.26	-0.11	2.51	96.26	-0.11	2.51	0.0	0.0	0.0	0.01	
17	42.21	65.82	52.84	42.21	65.82	52.84	0.0	0.0	0.0	0.01	
18	55.72	49.34	40.26	44.08	63.53	51.1	-11.63	14.2	10.84	21.32	
19	69.24	32.85	27.68	55.37	49.76	40.59	-13.85	16.91	12.91	25.4	
20	82.75	16.36	15.09	73.98	27.06	23.26	-8.76	10.7	8.17	16.07	
21	96.26	-0.11	2.51	96.26	-0.11	2.51	0.0	0.0	0.0	0.01	

Device: (T); Meas.: T10E00NP.PS; Date: 010501

www.ps.bam.de/DE14/10T/T10E00NP.PS

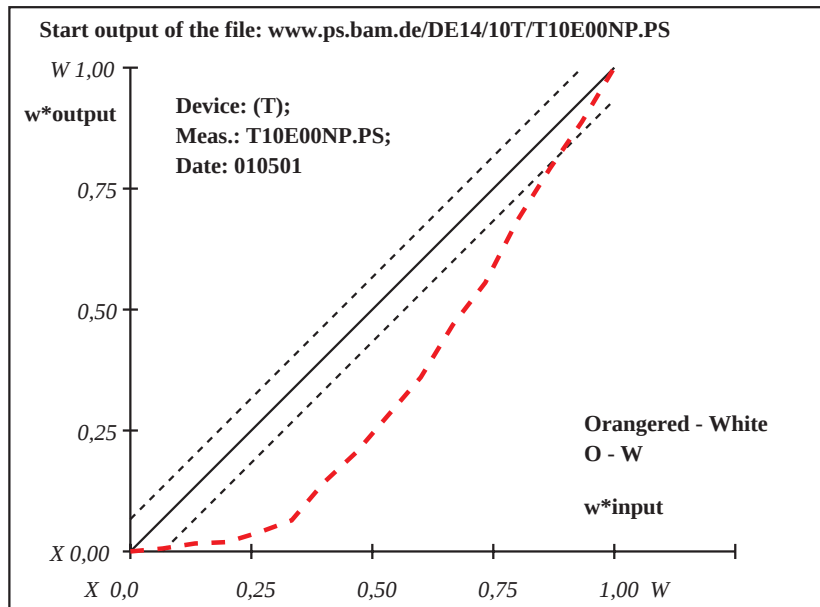


Device: (T); Meas.: T10E00NP.PS; Date: 010501

www.ps.bam.de/DE14/10T/T10E00NP.PS

i	LAB*ref			LAB*out, relative			LAB*out/c-ref			ΔE^*	Linearized output S2 Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G relative CIELAB data used for "out" $\Delta L^* = 96.02 - 42.61$ Regularity $g^* = 77.9$ Lightness gamut rel. to offset $f^* = 69.0$ ΔL^* -gray variation $v^* = 0.0$ Mean CIELAB difference (16 steps) $\Delta E^{*CIELAB} = 1.6$ Mean CIELAB difference (5 steps) $\Delta L^{*CIELAB} = 1.2$ Mean colour reproduction index: $R^*_{ab,m} = 93$
1	42.61	65.18	49.72	42.61	65.18	49.72	0.0	0.0	0.0	0.01	
2	46.17	60.82	46.57	46.5	60.41	46.28	0.33	-0.4	-0.28	0.6	
3	49.73	56.46	43.43	51.06	54.83	42.26	1.33	-1.62	-1.16	2.41	
4	53.29	52.09	40.28	54.32	50.84	39.38	1.03	-1.25	-0.9	1.86	
5	56.85	47.73	37.14	57.36	47.11	36.69	0.51	-0.61	-0.44	0.92	
6	60.41	43.37	33.99	60.73	42.98	33.71	0.32	-0.38	-0.27	0.58	
7	63.97	39.01	30.85	63.75	39.28	31.04	-0.21	0.27	0.19	0.4	
8	67.53	34.65	27.7	66.93	35.39	28.24	-0.6	0.75	0.54	1.1	
9	71.1	30.28	24.56	70.07	31.54	25.47	-1.02	1.26	0.91	1.86	
10	74.66	25.92	21.41	74.1	26.6	21.9	-0.54	0.68	0.49	1.0	
11	78.22	21.56	18.27	77.39	22.57	18.99	-0.81	1.01	0.73	1.49	
12	81.78	17.2	15.12	79.88	19.52	16.8	-1.89	2.33	1.68	3.44	
13	85.34	12.84	11.98	83.36	15.25	13.72	-1.96	2.42	1.74	3.57	
14	88.9	8.47	8.83	87.26	10.48	10.28	-1.63	2.01	1.45	2.97	
15	92.46	4.11	5.69	90.95	5.96	7.02	-1.5	1.85	1.33	2.73	
16	96.02	-0.24	2.54	96.02	-0.24	2.54	0.0	0.0	0.0	0.01	
17	42.61	65.18	49.72	42.61	65.18	49.72	0.0	0.0	0.0	0.01	
18	55.96	48.82	37.93	56.6	48.04	37.36	0.64	-0.77	-0.55	1.16	
19	69.32	32.47	26.13	68.5	33.47	26.85	-0.81	1.0	0.72	1.48	
20	82.67	16.11	14.33	80.75	18.46	16.03	-1.91	2.35	1.69	3.47	
21	96.02	-0.24	2.54	96.02	-0.24	2.54	0.0	0.0	0.0	0.01	

Device: (T); Meas.: T10E00FP.PS; Date: 010501

www.ps.bam.de/DE14/10T/T10E00FP.PS

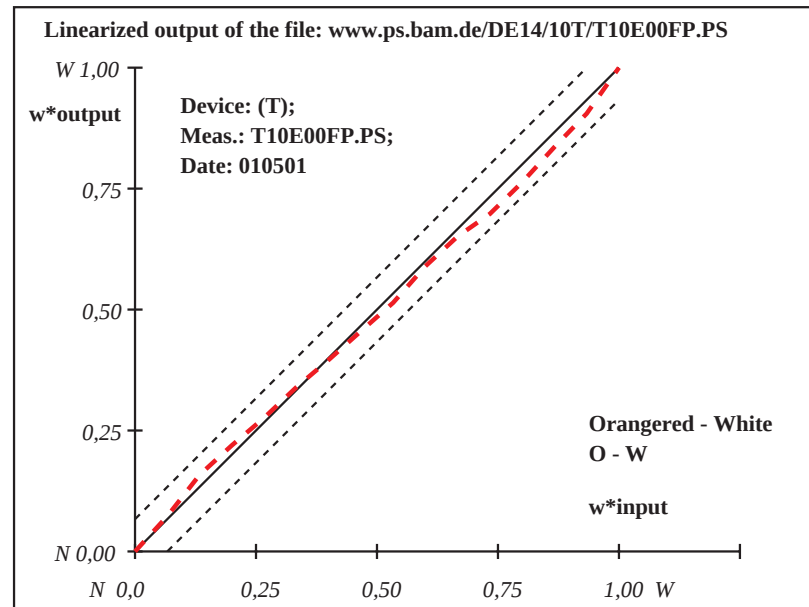

Device: (T); Meas.: T10E00FP.PS; Date: 010501


www.ps.bam.de/DE14/10T/T10E00FP.PS

i	LAB*ref	LAB*out, relative	LAB*out/c-ref	ΔE*
1	48.21 -76.53 32.93	48.21 -76.53 32.93	0.0 0.0 0.0	0.01
2	51.41 -71.43 30.9	48.99 -75.28 32.43	-2.4 -3.85 1.53	4.8
3	54.6 -66.32 28.88	49.3 -74.79 32.24	-5.29 -8.46 3.36	10.54
4	57.8 -61.22 26.85	49.54 -74.4 32.08	-8.24 -13.17 5.23	16.41
5	60.99 -56.11 24.83	50.75 -72.47 31.32	-10.24 -16.35 6.49	20.37
6	64.19 -51.01 22.8	52.29 -70.02 30.35	-11.89 -19.0 7.54	23.66
7	67.39 -45.9 20.78	55.35 -65.12 28.4	-12.03 -19.21 7.63	23.93
8	70.58 -40.8 18.75	60.05 -57.62 25.43	-10.52 -16.81 6.67	20.94
9	73.78 -35.69 16.73	63.38 -52.3 23.32	-10.39 -16.59 6.59	20.67
10	76.97 -30.59 14.7	66.82 -46.8 21.13	-10.14 -16.2 6.43	20.18
11	80.17 -25.48 12.68	70.55 -40.85 18.77	-9.61 -15.36 6.1	19.13
12	83.37 -20.38 10.65	74.66 -34.28 16.17	-8.69 -13.89 5.52	17.3
13	86.56 -15.27 8.63	80.68 -24.67 12.35	-5.87 -9.39 3.73	11.7
14	89.76 -10.17 6.6	86.06 -16.07 8.94	-3.68 -5.89 2.34	7.34
15	92.95 -5.06 4.58	90.89 -8.36 5.88	-2.06 -3.29 1.31	4.11
16	96.15 0.03 2.55	96.15 0.03 2.55	0.0 0.0 0.0	0.01
17	48.21 -76.53 32.93	48.21 -76.53 32.93	0.0 0.0 0.0	0.01
18	60.2 -57.39 25.34	50.45 -72.96 31.51	-9.74 -15.56 6.18	19.38
19	72.18 -38.25 17.74	61.72 -54.96 24.37	-10.45 -16.7 6.63	20.8
20	84.17 -19.1 10.15	76.17 -31.88 15.21	-7.99 -12.77 5.07	15.9
21	96.15 0.03 2.55	96.15 0.03 2.55	0.0 0.0 0.0	0.01
Mean colour reproduction index: $R^*_{ab,m} = 39$				

Start output S1
Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 96.15 - 48.21$
Regularity
 $g^* = 11.2$
Lightness gamut rel. to offset
 $f^* = 61.9$
 ΔL^* -gray variation
 $v^* = 0.0$
Mean CIELAB difference (16 steps)
 $\Delta E^*_{CIELAB} = 13.8$
Mean CIELAB difference (5 steps)
 $\Delta L^*_{CIELAB} = 11.2$

Device: (T); Meas.: T10E00NP.PS; Date: 010501

www.ps.bam.de/DE14/10T/T10E00NP.PS

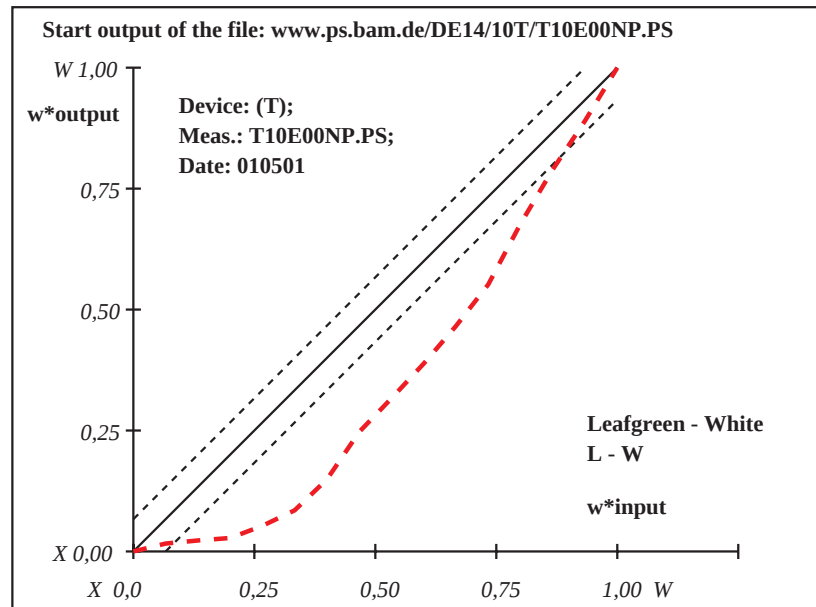

Device: (T); Meas.: T10E00NP.PS; Date: 010501


www.ps.bam.de/DE14/10T/T10E00NP.PS

i	LAB*ref	LAB*out, relative	LAB*out/c-ref	ΔE*
1	48.75 -74.61 34.09	48.75 -74.61 34.09	0.0 0.0 0.0	0.01
2	51.9 -69.65 31.99	50.13 -72.44 33.17	-1.76 -2.78 1.18	3.51
3	55.04 -64.68 29.89	55.3 -64.28 29.72	0.25 0.4 -0.16	0.5
4	58.19 -59.72 27.79	58.89 -58.62 27.32	0.7 1.1 -0.46	1.39
5	61.34 -54.76 25.69	60.8 -55.61 26.05	-0.53 -0.84 0.36	1.07
6	64.48 -49.79 23.59	62.91 -52.28 24.64	-1.56 -2.47 1.05	3.12
7	67.63 -44.83 21.49	66.78 -46.17 22.06	-0.84 -1.33 0.57	1.69
8	70.78 -39.87 19.39	69.1 -42.51 20.51	-1.67 -2.64 1.12	3.33
9	73.92 -34.9 17.29	72.44 -37.25 18.28	-1.48 -2.33 0.99	2.95
10	77.07 -29.94 15.19	76.41 -30.99 15.63	-0.65 -1.04 0.44	1.32
11	80.22 -24.98 13.09	79.9 -25.48 13.3	-0.31 -0.49 0.21	0.63
12	83.36 -20.01 10.99	82.32 -21.66 11.69	-1.03 -1.64 0.7	2.07
13	86.51 -15.05 8.89	84.77 -17.8 10.05	-1.73 -2.74 1.16	3.46
14	89.66 -10.09 6.79	88.52 -11.88 7.55	-1.13 -1.78 0.76	2.25
15	92.8 -5.12 4.69	92.01 -6.37 5.22	-0.78 -1.24 0.53	1.57
16	95.95 -0.16 2.59	95.95 -0.16 2.59	0.0 0.0 0.0	0.01
17	48.75 -74.61 34.09	48.75 -74.61 34.09	0.0 0.0 0.0	0.01
18	60.55 -56.0 26.22	60.32 -56.36 26.37	-0.22 -0.35 0.15	0.45
19	72.35 -37.39 18.34	70.77 -39.88 19.4	-1.57 -2.49 1.06	3.14
20	84.15 -18.77 10.47	82.93 -20.7 11.28	-1.21 -1.91 0.81	2.42
21	95.95 -0.16 2.59	95.95 -0.16 2.59	0.0 0.0 0.0	0.01
Mean colour reproduction index: $R^*_{ab,m} = 92$				

Linearized output S2
Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 95.95 - 48.75$
Regularity
 $g^* = 80.2$
Lightness gamut rel. to offset
 $f^* = 61.0$
 ΔL^* -gray variation
 $v^* = 0.0$
Mean CIELAB difference (16 steps)
 $\Delta E^*_{CIELAB} = 1.8$
Mean CIELAB difference (5 steps)
 $\Delta L^*_{CIELAB} = 1.2$

Device: (T); Meas.: T10E00FP.PS; Date: 010501

www.ps.bam.de/DE14/10T/T10E00FP.PS

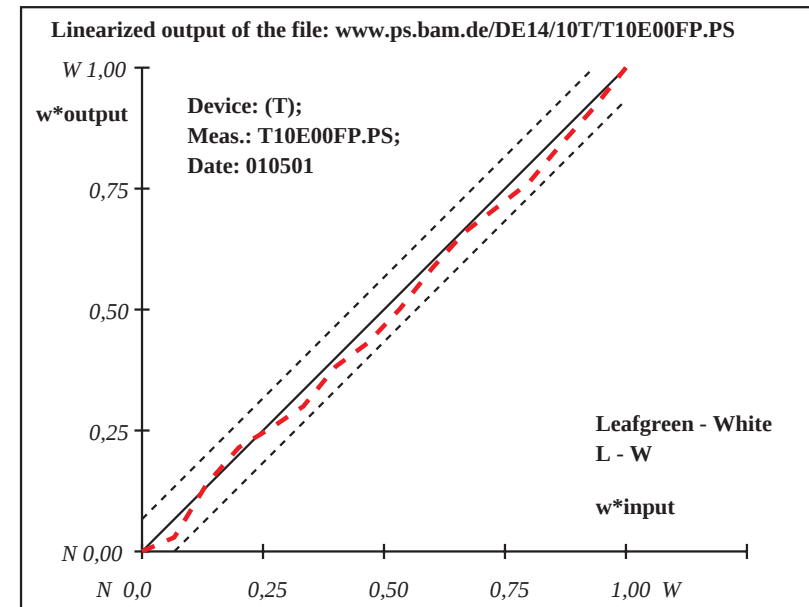

Device: (T); Meas.: T10E00FP.PS; Date: 010501


www.ps.bam.de/DE14/10T/T10E00FP.PS

i	LAB*ref	LAB*out, relative	LAB*out/c-ref	ΔE^*
1	34.16 -2.05 -44.38	34.16 -2.05 -44.38	0.0 0.0 0.0	0.01
2	38.31 -1.93 -41.24	35.97 -2.0 -43.01	-2.33 -0.06 -1.76	2.94
3	42.46 -1.8 -38.09	39.19 -1.9 -40.57	-3.26 -0.09 -2.47	4.1
4	46.6 -1.68 -34.95	40.53 -1.86 -39.55	-6.06 -0.17 -4.59	7.62
5	50.75 -1.56 -31.81	43.23 -1.78 -37.51	-7.51 -0.21 -5.69	9.44
6	54.9 -1.43 -28.67	46.08 -1.7 -35.35	-8.81 -0.25 -6.67	11.06
7	59.05 -1.31 -25.52	47.66 -1.65 -34.15	-11.38 -0.33 -8.62	14.3
8	63.2 -1.19 -22.38	51.59 -1.53 -31.17	-11.59 -0.34 -8.78	14.56
9	67.34 -1.06 -19.24	56.11 -1.4 -27.75	-11.23 -0.32 -8.5	14.1
10	71.49 -0.94 -16.1	59.58 -1.29 -25.12	-11.91 -0.34 -9.02	14.95
11	75.64 -0.82 -12.95	64.14 -1.16 -21.67	-11.49 -0.33 -8.7	14.43
12	79.79 -0.69 -9.81	69.03 -1.01 -17.96	-10.75 -0.31 -8.14	13.5
13	83.94 -0.57 -6.67	75.54 -0.82 -13.03	-8.39 -0.24 -6.35	10.54
14	88.08 -0.45 -3.53	82.56 -0.61 -7.71	-5.51 -0.15 -4.17	6.93
15	92.23 -0.32 -0.38	89.19 -0.41 -2.69	-3.03 -0.08 -2.29	3.81
16	96.38 -0.2 2.75	96.38 -0.2 2.75	0.0 0.0 0.0	0.01
17	34.16 -2.05 -44.38	34.16 -2.05 -44.38	0.0 0.0 0.0	0.01
18	49.72 -1.59 -32.6	42.55 -1.8 -38.02	-7.15 -0.2 -5.42	8.99
19	65.27 -1.13 -20.81	53.85 -1.46 -29.46	-11.41 -0.33 -8.64	14.33
20	80.82 -0.66 -9.03	70.66 -0.96 -16.73	-10.16 -0.29 -7.69	12.76
21	96.38 -0.2 2.75	96.38 -0.2 2.75	0.0 0.0 0.0	0.01
Mean colour reproduction index: $R^*_{ab,m} = 61$				

Start output S1
Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 96.38 - 34.16$
Regularity
 $g^* = 32.6$
Lightness gamut rel. to offset
 $f^* = 80.4$
 ΔL^* -gray variation
 $v^* = 0.0$
Mean CIELAB difference (16 steps)
 $\Delta E^*_{CIELAB} = 8.9$
Mean CIELAB difference (5 steps)
 $\Delta L^*_{CIELAB} = 7.2$

Device: (T); Meas.: T10E00NP.PS; Date: 010501

www.ps.bam.de/DE14/10T/T10E00NP.PS

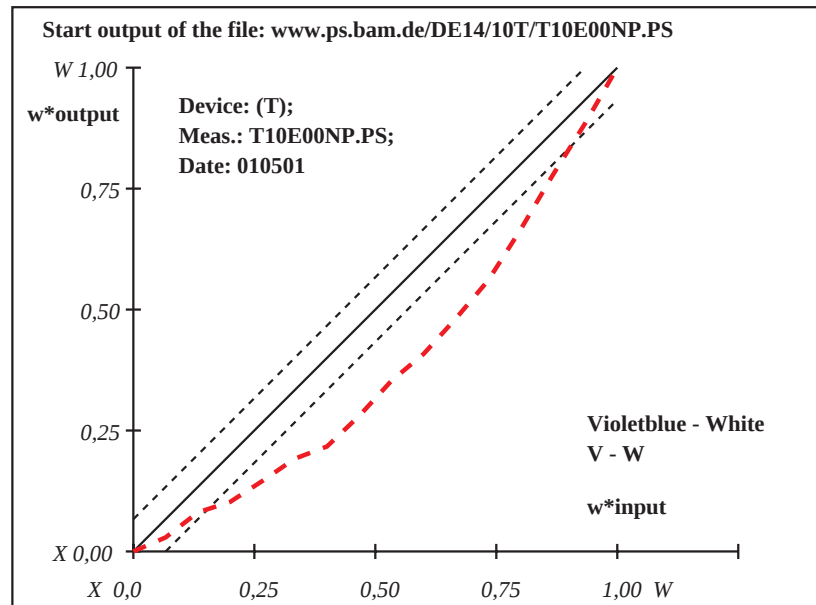

Device: (T); Meas.: T10E00NP.PS; Date: 010501


www.ps.bam.de/DE14/10T/T10E00NP.PS

i	LAB*ref	LAB*out, relative	LAB*out/c-ref	ΔE^*
1	34.61 -1.38 -43.37	34.61 -1.38 -43.37	0.0 0.0 0.0	0.01
2	38.7 -1.3 -40.31	40.68 -1.27 -38.82	1.98 0.04 1.48	2.47
3	42.8 -1.23 -37.24	43.21 -1.22 -36.93	0.41 0.01 0.31	0.51
4	46.89 -1.15 -34.18	46.83 -1.15 -34.22	-0.05 0.0 -0.04	0.08
5	50.98 -1.07 -31.11	52.69 -1.04 -29.83	1.71 0.03 1.28	2.13
6	55.08 -0.99 -28.05	56.32 -0.97 -27.11	1.25 0.02 0.93	1.56
7	59.17 -0.92 -24.98	60.49 -0.89 -24.0	1.32 0.02 0.99	1.64
8	63.26 -0.84 -21.92	63.82 -0.83 -21.5	0.55 0.01 0.41	0.69
9	67.36 -0.76 -18.85	68.06 -0.75 -18.32	0.71 0.01 0.53	0.88
10	71.45 -0.68 -15.79	71.65 -0.68 -15.63	0.2 0.0 0.15	0.26
11	75.54 -0.61 -12.72	75.71 -0.6 -12.6	0.16 0.0 0.12	0.21
12	79.64 -0.53 -9.66	78.56 -0.55 -10.46	-1.06 -0.01 -0.79	1.34
13	83.73 -0.45 -6.59	82.27 -0.48 -7.69	-1.45 -0.02 -1.08	1.82
14	87.82 -0.37 -3.53	87.56 -0.38 -3.72	-0.25 0.0 -0.19	0.33
15	91.92 -0.3 -0.46	92.75 -0.28 0.15	0.84 0.02 0.63	1.05
16	96.01 -0.22 2.59	96.01 -0.22 2.59	0.0 0.0 0.0	0.01
17	34.61 -1.38 -43.37	34.61 -1.38 -43.37	0.0 0.0 0.0	0.01
18	49.96 -1.09 -31.88	51.22 -1.07 -30.93	1.26 0.02 0.95	1.58
19	65.31 -0.8 -20.39	65.94 -0.79 -19.91	0.63 0.01 0.47	0.79
20	80.66 -0.51 -8.89	79.49 -0.53 -9.77	-1.16 -0.01 -0.87	1.46
21	96.01 -0.22 2.59	96.01 -0.22 2.59	0.0 0.0 0.0	0.01
Mean colour reproduction index: $R^*_{ab,m} = 96$				

Linearized output S2
Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 96.01 - 34.61$
Regularity
 $g^* = 81.6$
Lightness gamut rel. to offset
 $f^* = 79.3$
 ΔL^* -gray variation
 $v^* = 0.0$
Mean CIELAB difference (16 steps)
 $\Delta E^*_{CIELAB} = 0.9$
Mean CIELAB difference (5 steps)
 $\Delta L^*_{CIELAB} = 0.8$

Device: (T); Meas.: T10E00FP.PS; Date: 010501

www.ps.bam.de/DE14/10T/T10E00FP.PS

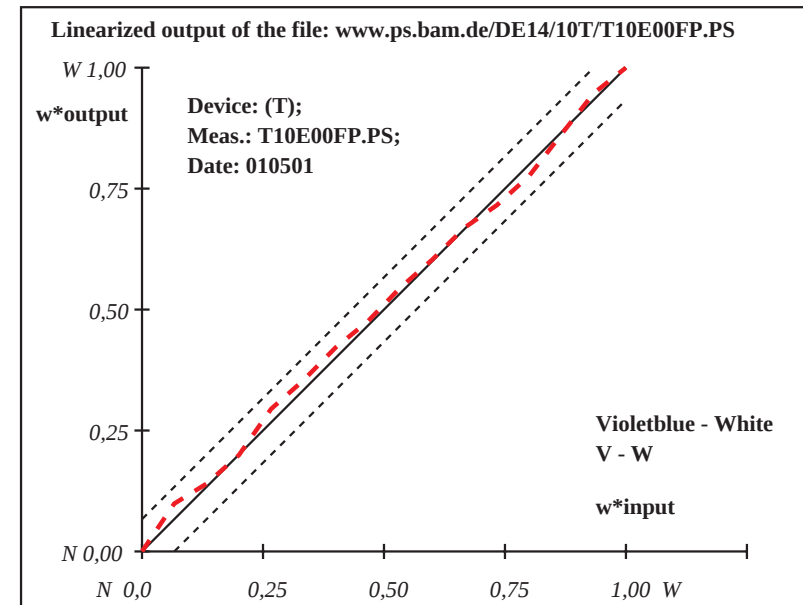

Device: (T); Meas.: T10E00FP.PS; Date: 010501


www.ps.bam.de/DE14/10T/T10E00FP.PS

i	LAB*ref			LAB*out, relative			LAB*out/c-ref			ΔE^*
1	17.89	-1.45	2.43	17.89	-1.45	2.43	0.0	0.0	0.0	0.01
2	23.12	-1.36	2.44	18.5	-1.44	2.43	-4.61	-0.07	0.0	4.62
3	28.35	-1.27	2.45	18.61	-1.44	2.43	-9.72	-0.16	-0.01	9.74
4	33.57	-1.18	2.46	22.7	-1.37	2.44	-10.87	-0.18	-0.01	10.88
5	38.8	-1.09	2.47	29.24	-1.26	2.45	-9.56	-0.15	-0.01	9.57
6	44.03	-1.0	2.48	37.71	-1.11	2.47	-6.31	-0.1	0.0	6.32
7	49.26	-0.91	2.49	44.28	-1.0	2.48	-4.97	-0.08	0.0	4.98
8	54.49	-0.82	2.5	51.04	-0.88	2.5	-3.44	-0.05	0.0	3.45
9	59.71	-0.74	2.52	56.07	-0.8	2.51	-3.64	-0.05	0.0	3.65
10	64.94	-0.65	2.53	61.49	-0.7	2.52	-3.44	-0.05	0.0	3.45
11	70.17	-0.56	2.54	68.33	-0.59	2.53	-1.83	-0.02	0.0	1.84
12	75.4	-0.47	2.55	75.38	-0.47	2.55	0.0	0.0	0.0	0.02
13	80.63	-0.38	2.56	81.91	-0.36	2.56	1.29	0.02	0.0	1.29
14	85.85	-0.29	2.57	87.1	-0.27	2.57	1.25	0.02	0.0	1.25
15	91.08	-0.2	2.58	91.0	-0.2	2.58	-0.07	0.0	0.0	0.08
16	96.31	-0.11	2.59	96.31	-0.11	2.59	0.0	0.0	0.0	0.01
17	17.89	-1.45	2.43	17.89	-1.45	2.43	0.0	0.0	0.0	0.01
18	37.5	-1.12	2.47	27.6	-1.28	2.45	-9.88	-0.16	-0.01	9.89
19	57.1	-0.78	2.51	53.55	-0.84	2.5	-3.54	-0.05	0.0	3.55
20	76.71	-0.45	2.55	77.02	-0.44	2.55	0.31	0.01	0.0	0.31
21	96.31	-0.11	2.59	96.31	-0.11	2.59	0.0	0.0	0.0	0.01

Start output S1
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 96.31 - 17.89$
Regularity
 $g^* = 37.4$
Lightness gamut rel. to offset
 $f^* = 101.3$
 ΔL^* -gray variation
 $v^* = 0.0$
Mean CIELAB difference (16 steps)
 $\Delta E^*_{CIELAB} = 3.8$
Mean CIELAB difference (5 steps)
 $\Delta L^*_{CIELAB} = 2.8$
Mean colour reproduction index: $R^*_{ab,m} = 84$

Device: (T); Meas.: T10E00NP.PS; Date: 010501

www.ps.bam.de/DE14/10T/T10E00NP.PS

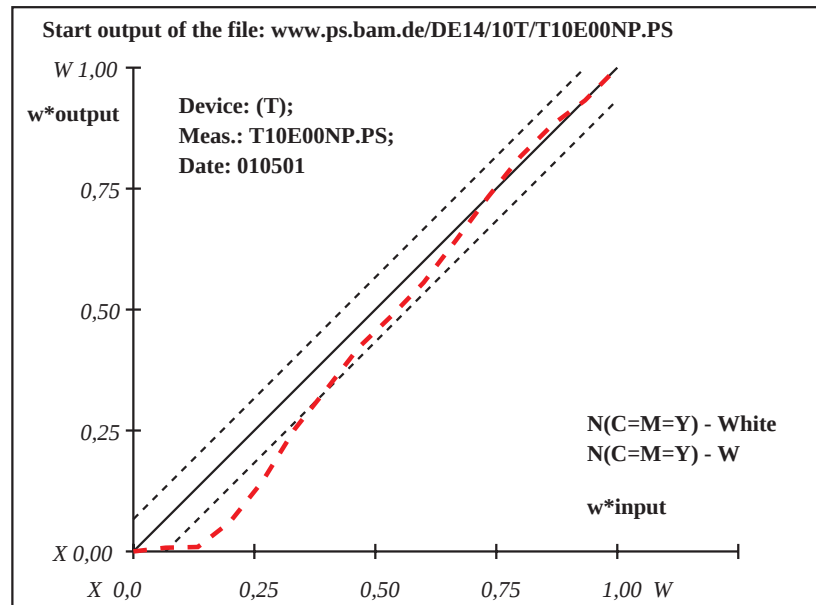

Device: (T); Meas.: T10E00NP.PS; Date: 010501


www.ps.bam.de/DE14/10T/T10E00NP.PS

i	LAB*ref			LAB*out, relative			LAB*out/c-ref			ΔE^*
1	18.73	-0.18	1.09	18.73	-0.18	1.09	0.0	0.0	0.0	0.01
2	23.88	-0.19	1.19	24.58	-0.19	1.2	0.7	0.0	0.01	0.7
3	29.03	-0.19	1.29	31.38	-0.2	1.33	2.35	0.0	0.05	2.35
4	34.18	-0.2	1.39	35.57	-0.2	1.41	1.39	0.0	0.03	1.39
5	39.33	-0.21	1.49	42.5	-0.21	1.55	3.17	0.0	0.06	3.18
6	44.48	-0.21	1.59	47.55	-0.22	1.65	3.07	0.0	0.06	3.07
7	49.63	-0.22	1.69	50.72	-0.22	1.71	1.09	0.0	0.02	1.09
8	54.78	-0.23	1.79	53.06	-0.22	1.75	-1.7	0.0	-0.02	1.71
9	59.92	-0.23	1.88	58.09	-0.23	1.85	-1.83	0.0	-0.03	1.84
10	65.07	-0.24	1.98	62.67	-0.24	1.94	-2.4	0.0	-0.04	2.41
11	70.22	-0.25	2.08	69.21	-0.25	2.06	-1.01	0.0	-0.01	1.02
12	75.37	-0.25	2.18	72.3	-0.25	2.12	-3.06	0.0	-0.05	3.07
13	80.52	-0.26	2.28	78.3	-0.26	2.24	-2.21	0.0	-0.03	2.22
14	85.67	-0.27	2.38	84.05	-0.26	2.35	-1.61	0.0	-0.02	1.62
15	90.82	-0.27	2.48	90.26	-0.27	2.47	-0.55	0.0	0.0	0.56
16	95.97	-0.28	2.58	95.97	-0.28	2.58	0.0	0.0	0.0	0.01
17	18.73	-0.18	1.09	18.73	-0.18	1.09	0.0	0.0	0.0	0.01
18	38.04	-0.21	1.46	40.77	-0.21	1.52	2.73	0.0	0.05	2.73
19	57.35	-0.23	1.84	55.57	-0.23	1.8	-1.77	0.0	-0.02	1.78
20	76.66	-0.25	2.21	73.8	-0.25	2.15	-2.85	0.0	-0.05	2.86
21	95.97	-0.28	2.58	95.97	-0.28	2.58	0.0	0.0	0.0	0.01

Linearized output S2
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 95.97 - 18.73$
Regularity
 $g^* = 66.8$
Lightness gamut rel. to offset
 $f^* = 99.8$
 ΔL^* -gray variation
 $v^* = 0.0$
Mean CIELAB difference (16 steps)
 $\Delta E^*_{CIELAB} = 1.6$
Mean CIELAB difference (5 steps)
 $\Delta L^*_{CIELAB} = 1.5$
Mean colour reproduction index: $R^*_{ab,m} = 93$

Device: (T); Meas.: T10E00FP.PS; Date: 010501

www.ps.bam.de/DE14/10T/T10E00FP.PS

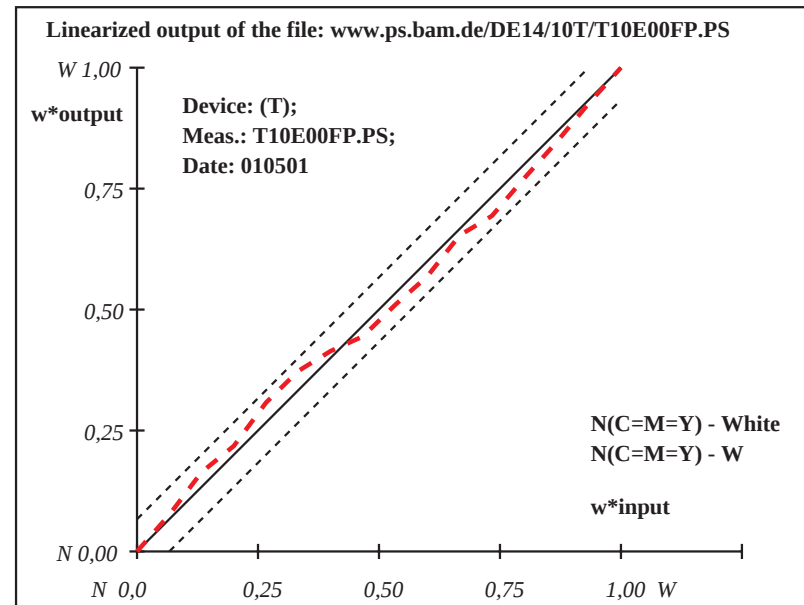

Device: (T); Meas.: T10E00FP.PS; Date: 010501

www.ps.bam.de/DE14/10T/T10E00FP.PS

Output linearization of 16 colour steps according to ISO/IEC 15775; PS operator cmyn* setcmykcolor