


i	LAB*ref		LAB*out		LAB*out/c-ref		ΔE^*		
1	18.0	0.0	18.0	0.0	0.0	0.0	0.01	0.01	Start output S1
2	23.16	0.0	38.0	0.0	14.84	0.0	14.84	0.04	Specification according to
3	28.32	0.0	46.3	0.0	17.98	0.0	17.98	0.02	ISO/IEC 15775 Annex G
4	33.48	0.0	52.6	0.0	19.12	0.0	19.12	0.02	and DIN 33866-1 Annex G
5	38.64	0.0	58.0	0.0	19.36	0.0	19.36	0.04	only L^*-lightness used
6	43.8	0.0	62.7	0.0	18.9	0.0	18.9	0.01	$\Delta L^* = 95.4 - 18.0$
7	48.96	0.0	67.0	0.0	18.04	0.0	18.04	0.04	Regularity
8	54.12	0.0	70.9	0.0	16.78	0.0	16.78	0.02	$g^* = 28.6$
9	59.28	0.0	74.5	0.0	15.22	0.0	15.22	0.02	Lightness gamut rel. to offset
10	64.44	0.0	78.0	0.0	13.56	0.0	13.56	0.04	$f^* = 100.0$
11	69.6	0.0	81.2	0.0	11.6	0.0	11.6	0.01	
12	74.76	0.0	83.4	0.0	8.64	0.0	8.64	0.04	ΔL^* -gray variation
13	79.92	0.0	87.2	0.0	7.28	0.0	7.28	0.02	$v^* = 0.0$
14	85.08	0.0	90.1	0.0	5.02	0.0	5.02	0.02	
15	90.24	0.0	92.8	0.0	2.56	0.0	2.56	0.04	Mean lightness difference (16 steps)
16	95.4	0.0	95.4	0.0	0.0	0.0	0.01	0.01	$\Delta E^*_{CIELAB} = 11.8$
17	18.0	0.0	18.0	0.0	0.0	0.0	0.01	0.01	
18	37.35	0.0	56.65	0.0	19.3	0.0	19.3	0.03	
19	56.7	0.0	72.7	0.0	16.0	0.0	16.0	0.01	
20	76.05	0.0	84.35	0.0	8.3	0.0	8.3	0.03	Mean lightness difference (5 steps)
21	95.4	0.0	95.4	0.0	0.0	0.0	0.01	0.01	$\Delta L^*_{CIELAB} = 8.7$
Mean colour reproduction index: $R^*_{ab,m} = 49$									


Meas.: DE18/10L/L18E00NP.PS/.PDF; Device: X=OP8c plus; ; Date: M2002-08-01

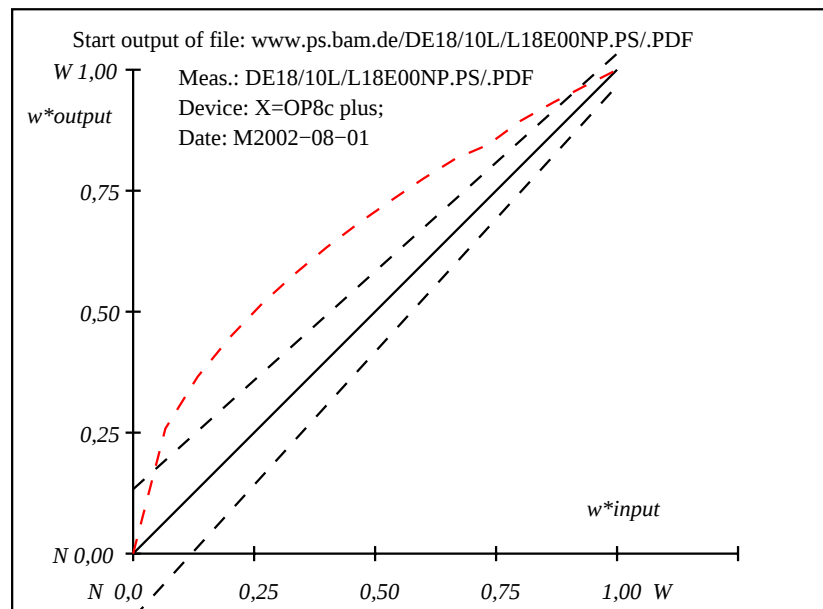

Meas.: DE18/10L/L18E00NP.PS/.PDF; Device: X=OP8c plus; ; Date: M2002-08-01

i	LAB*ref		LAB*out		LAB*out/c-ref		ΔE^*		
1	18.0	0.0	18.0	0.0	0.0	0.0	0.01	0.01	Linearized output S2
2	23.16	0.0	23.2	0.0	0.04	0.0	0.04	0.04	Specification according to
3	28.32	0.0	28.3	0.0	-0.01	0.0	0.02	0.02	ISO/IEC 15775 Annex G
4	33.48	0.0	33.5	0.0	0.02	0.0	0.02	0.02	and DIN 33866-1 Annex G
5	38.64	0.0	38.6	0.0	-0.03	0.0	0.04	0.04	only L^*-lightness used
6	43.8	0.0	43.8	0.0	0.0	0.0	0.01	0.01	$\Delta L^* = 95.4 - 18.0$
7	48.96	0.0	49.0	0.0	0.04	0.0	0.04	0.04	Regularity
8	54.12	0.0	54.1	0.0	-0.01	0.0	0.02	0.02	$g^* = 99.7$
9	59.28	0.0	59.3	0.0	0.02	0.0	0.02	0.02	Lightness gamut rel. to offset
10	64.44	0.0	64.4	0.0	-0.03	0.0	0.04	0.04	$f^* = 100.0$
11	69.6	0.0	69.6	0.0	0.0	0.0	0.01	0.01	
12	74.76	0.0	74.8	0.0	0.04	0.0	0.04	0.04	ΔL^* -gray variation
13	79.92	0.0	79.9	0.0	-0.01	0.0	0.02	0.02	$v^* = 0.0$
14	85.08	0.0	85.1	0.0	0.02	0.0	0.02	0.02	
15	90.24	0.0	90.2	0.0	-0.03	0.0	0.04	0.04	Mean lightness difference (16 steps)
16	95.4	0.0	95.4	0.0	0.0	0.0	0.01	0.01	$\Delta E^*_{CIELAB} = 0.0$
17	18.0	0.0	18.0	0.0	0.0	0.0	0.01	0.01	
18	37.35	0.0	37.32	0.0	-0.02	0.0	0.03	0.03	
19	56.7	0.0	56.7	0.0	0.0	0.0	0.01	0.01	
20	76.05	0.0	76.08	0.0	0.03	0.0	0.03	0.03	Mean lightness difference (5 steps)
21	95.4	0.0	95.4	0.0	0.0	0.0	0.01	0.01	$\Delta L^*_{CIELAB} = 0.0$
Mean colour reproduction index: $R^*_{ab,m} = 100$									

Meas.: DE18/10L/L18E00SP.PS/.PDF; Device: X=OP8c plus; ; Date: M2002-08-01, S21

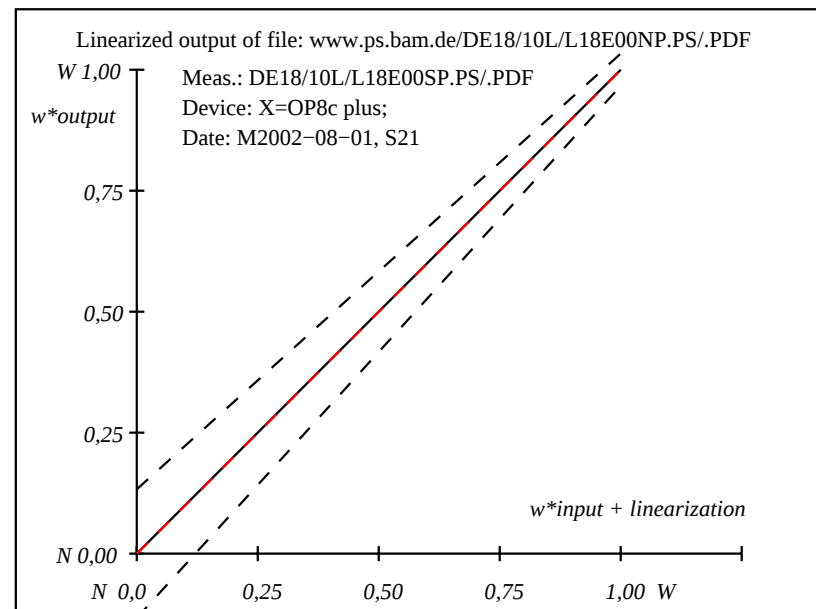


Meas.: DE18/10L/L18E00SP.PS/.PDF; Device: X=OP8c plus; ; Date: M2002-08-01, S21



i	LAB*ref			LAB*out			LAB*out/c-ref			ΔE^*	Start output S1
1	18.0	0.0	0.0	18.0	0.0	0.0	0.0	0.0	0.0	0.01	Specification according to
2	23.16	0.0	0.0	38.0	0.0	0.0	14.84	0.0	0.0	14.84	ISO/IEC 15775 Annex G
3	28.32	0.0	0.0	46.3	0.0	0.0	17.98	0.0	0.0	17.98	and DIN 33866-1 Annex G
4	33.48	0.0	0.0	52.6	0.0	0.0	19.12	0.0	0.0	19.12	only L*-lightness used
5	38.64	0.0	0.0	58.0	0.0	0.0	19.36	0.0	0.0	19.36	$\Delta L^* = 95.4 - 18.0$
6	43.8	0.0	0.0	62.7	0.0	0.0	18.9	0.0	0.0	18.9	Regularity
7	48.96	0.0	0.0	67.0	0.0	0.0	18.04	0.0	0.0	18.04	$g^* = 28.6$
8	54.12	0.0	0.0	70.9	0.0	0.0	16.78	0.0	0.0	16.78	
9	59.28	0.0	0.0	74.5	0.0	0.0	15.22	0.0	0.0	15.22	Lightness gamut rel. to offset
10	64.44	0.0	0.0	78.0	0.0	0.0	13.56	0.0	0.0	13.56	$f^* = 100.0$
11	69.6	0.0	0.0	81.2	0.0	0.0	11.6	0.0	0.0	11.6	
12	74.76	0.0	0.0	83.4	0.0	0.0	8.64	0.0	0.0	8.64	ΔL^* -gray variation
13	79.92	0.0	0.0	87.2	0.0	0.0	7.28	0.0	0.0	7.28	$v^* = 0.0$
14	85.08	0.0	0.0	90.1	0.0	0.0	5.02	0.0	0.0	5.02	
15	90.24	0.0	0.0	92.8	0.0	0.0	2.56	0.0	0.0	2.56	Mean lightness difference (16 steps)
16	95.4	0.0	0.0	95.4	0.0	0.0	0.0	0.0	0.0	0.01	$\Delta E^*_{CIELAB} = 11.8$
17	18.0	0.0	0.0	18.0	0.0	0.0	0.0	0.0	0.0	0.01	
18	37.35	0.0	0.0	56.65	0.0	0.0	19.3	0.0	0.0	19.3	
19	56.7	0.0	0.0	72.7	0.0	0.0	16.0	0.0	0.0	16.0	
20	76.05	0.0	0.0	84.35	0.0	0.0	8.3	0.0	0.0	8.3	Mean lightness difference (5 steps)
21	95.4	0.0	0.0	95.4	0.0	0.0	0.0	0.0	0.0	0.01	$\Delta L^*_{CIELAB} = 8.7$
Mean colour reproduction index: $R^*_{ab,m} = 49$											


Meas.: DE18/10L/L18E00NP.PS/.PDF; Device: X=OP8c plus; ; Date: M2002-08-01

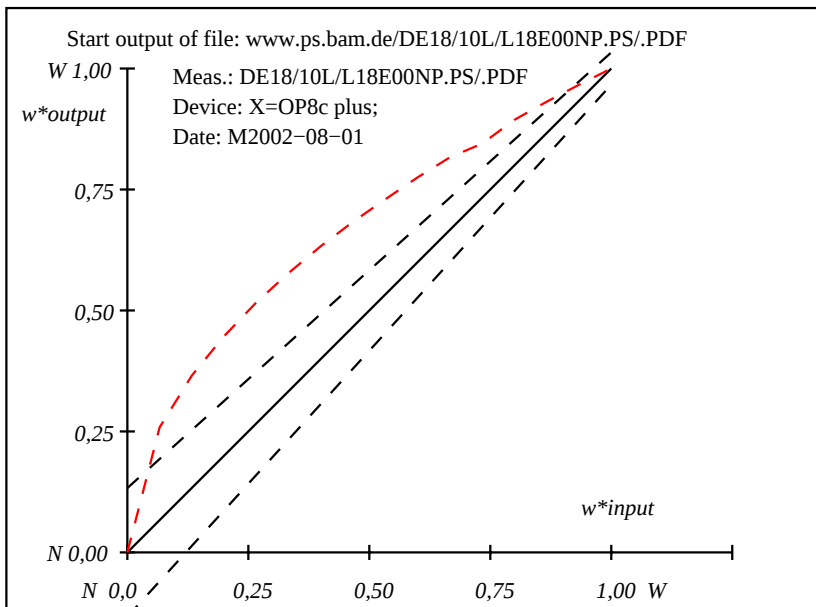

Meas.: DE18/10L/L18E00NP.PS/.PDF; Device: X=OP8c plus; ; Date: M2002-08-01

i	LAB*ref			LAB*out			LAB*out/c-ref			ΔE^*	Linearized output S2
1	18.0	0.0	0.0	18.0	0.0	0.0	0.0	0.0	0.0	0.01	Specification according to
2	23.16	0.0	0.0	23.2	0.0	0.0	0.04	0.0	0.0	0.04	ISO/IEC 15775 Annex G
3	28.32	0.0	0.0	28.3	0.0	0.0	-0.01	0.0	0.0	0.02	and DIN 33866-1 Annex G
4	33.48	0.0	0.0	33.5	0.0	0.0	0.02	0.0	0.0	0.02	only L*-lightness used
5	38.64	0.0	0.0	38.6	0.0	0.0	-0.03	0.0	0.0	0.04	$\Delta L^* = 95.4 - 18.0$
6	43.8	0.0	0.0	43.8	0.0	0.0	0.0	0.0	0.0	0.01	Regularity
7	48.96	0.0	0.0	49.0	0.0	0.0	0.04	0.0	0.0	0.04	$g^* = 99.7$
8	54.12	0.0	0.0	54.1	0.0	0.0	-0.01	0.0	0.0	0.02	
9	59.28	0.0	0.0	59.3	0.0	0.0	0.02	0.0	0.0	0.02	Lightness gamut rel. to offset
10	64.44	0.0	0.0	64.4	0.0	0.0	-0.03	0.0	0.0	0.04	$f^* = 100.0$
11	69.6	0.0	0.0	69.6	0.0	0.0	0.0	0.0	0.0	0.01	
12	74.76	0.0	0.0	74.8	0.0	0.0	0.04	0.0	0.0	0.04	ΔL^* -gray variation
13	79.92	0.0	0.0	79.9	0.0	0.0	-0.01	0.0	0.0	0.02	$v^* = 0.0$
14	85.08	0.0	0.0	85.1	0.0	0.0	0.02	0.0	0.0	0.02	
15	90.24	0.0	0.0	90.2	0.0	0.0	-0.03	0.0	0.0	0.04	Mean lightness difference (16 steps)
16	95.4	0.0	0.0	95.4	0.0	0.0	0.0	0.0	0.0	0.01	$\Delta E^*_{CIELAB} = 0.0$
17	18.0	0.0	0.0	18.0	0.0	0.0	0.0	0.0	0.0	0.01	
18	37.35	0.0	0.0	37.32	0.0	0.0	-0.02	0.0	0.0	0.03	
19	56.7	0.0	0.0	56.7	0.0	0.0	0.0	0.0	0.0	0.01	
20	76.05	0.0	0.0	76.08	0.0	0.0	0.03	0.0	0.0	0.03	Mean lightness difference (5 steps)
21	95.4	0.0	0.0	95.4	0.0	0.0	0.0	0.0	0.0	0.01	$\Delta L^*_{CIELAB} = 0.0$
Mean colour reproduction index: $R^*_{ab,m} = 100$											

Meas.: DE18/10L/L18E00SP.PS/.PDF; Device: X=OP8c plus; ; Date: M2002-08-01, S22

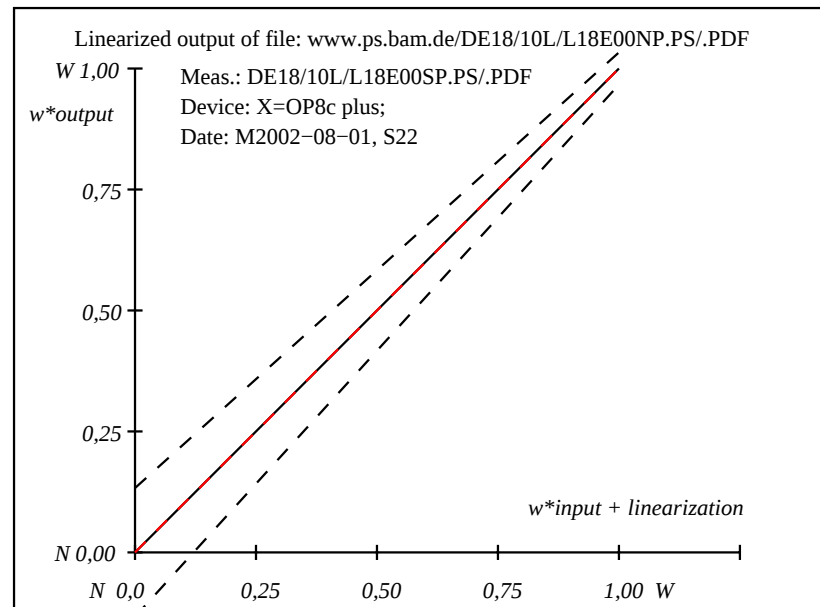

Meas.: DE18/10L/L18E00SP.PS/.PDF; Device: X=OP8c plus; ; Date: M2002-08-01, S22


Output linearization of 16 grey steps according to

ISO/IEC 15775 and
DIN 33866-X;

input: w^* setgray
output: w^* setgray

i	LAB*ref			LAB*out			LAB*out/c-ref			ΔE^*	Start output S1
1	18.0	0.0	0.0	18.0	0.0	0.0	0.0	0.0	0.0	0.01	Specification according to
2	23.16	0.0	0.0	38.0	0.0	0.0	14.84	0.0	0.0	14.84	ISO/IEC 15775 Annex G
3	28.32	0.0	0.0	46.3	0.0	0.0	17.98	0.0	0.0	17.98	and DIN 33866-1 Annex G
4	33.48	0.0	0.0	52.6	0.0	0.0	19.12	0.0	0.0	19.12	only L*-lightness used
5	38.64	0.0	0.0	58.0	0.0	0.0	19.36	0.0	0.0	19.36	$\Delta L^* = 95.4 - 18.0$
6	43.8	0.0	0.0	62.7	0.0	0.0	18.9	0.0	0.0	18.9	Regularity
7	48.96	0.0	0.0	67.0	0.0	0.0	18.04	0.0	0.0	18.04	$g^* = 28.6$
8	54.12	0.0	0.0	70.9	0.0	0.0	16.78	0.0	0.0	16.78	
9	59.28	0.0	0.0	74.5	0.0	0.0	15.22	0.0	0.0	15.22	Lightness gamut rel. to offset
10	64.44	0.0	0.0	78.0	0.0	0.0	13.56	0.0	0.0	13.56	$f^* = 100.0$
11	69.6	0.0	0.0	81.2	0.0	0.0	11.6	0.0	0.0	11.6	
12	74.76	0.0	0.0	83.4	0.0	0.0	8.64	0.0	0.0	8.64	ΔL^* -gray variation
13	79.92	0.0	0.0	87.2	0.0	0.0	7.28	0.0	0.0	7.28	$v^* = 0.0$
14	85.08	0.0	0.0	90.1	0.0	0.0	5.02	0.0	0.0	5.02	
15	90.24	0.0	0.0	92.8	0.0	0.0	2.56	0.0	0.0	2.56	Mean lightness difference (16 steps)
16	95.4	0.0	0.0	95.4	0.0	0.0	0.0	0.0	0.0	0.01	$\Delta E^*_{CIELAB} = 11.8$
17	18.0	0.0	0.0	18.0	0.0	0.0	0.0	0.0	0.0	0.01	
18	37.35	0.0	0.0	56.65	0.0	0.0	19.3	0.0	0.0	19.3	
19	56.7	0.0	0.0	72.7	0.0	0.0	16.0	0.0	0.0	16.0	
20	76.05	0.0	0.0	84.35	0.0	0.0	8.3	0.0	0.0	8.3	Mean lightness difference (5 steps)
21	95.4	0.0	0.0	95.4	0.0	0.0	0.0	0.0	0.0	0.01	$\Delta L^*_{CIELAB} = 8.7$
Mean colour reproduction index: $R^*_{ab,m} = 49$											


Meas.: DE18/10L/L18E00NP.PS/.PDF; Device: X=OP8c plus; ; Date: M2002-08-01

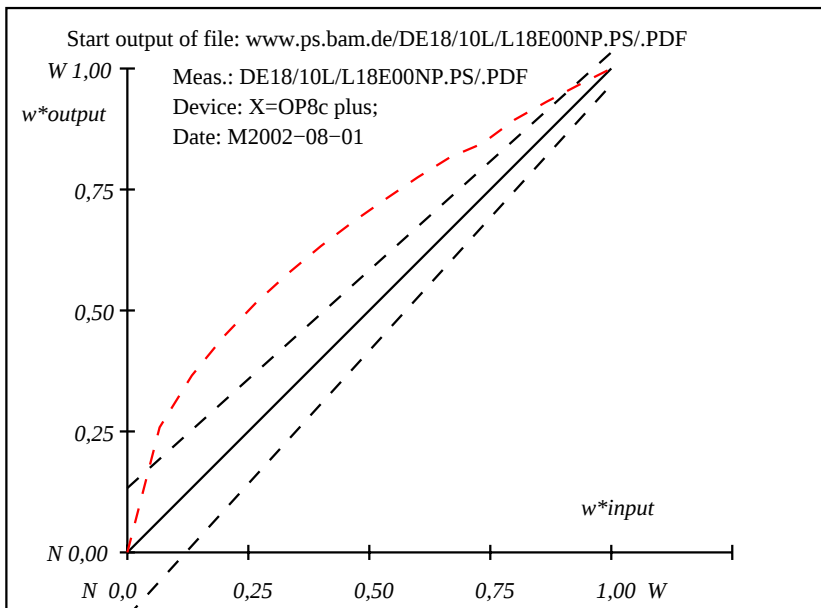

Meas.: DE18/10L/L18E00NP.PS/.PDF; Device: X=OP8c plus; ; Date: M2002-08-01

i	LAB*ref			LAB*out			LAB*out/c-ref			ΔE^*	Linearized output S2
1	18.0	0.0	0.0	18.0	0.0	0.0	0.0	0.0	0.0	0.01	Specification according to
2	23.16	0.0	0.0	23.2	0.0	0.0	0.04	0.0	0.0	0.04	ISO/IEC 15775 Annex G
3	28.32	0.0	0.0	28.3	0.0	0.0	-0.01	0.0	0.0	0.02	and DIN 33866-1 Annex G
4	33.48	0.0	0.0	38.6	0.0	0.0	5.12	0.0	0.0	5.12	only L*-lightness used
5	38.64	0.0	0.0	33.5	0.0	0.0	-5.13	0.0	0.0	5.14	$\Delta L^* = 95.4 - 18.0$
6	43.8	0.0	0.0	43.8	0.0	0.0	0.0	0.0	0.0	0.01	Regularity
7	48.96	0.0	0.0	49.0	0.0	0.0	0.04	0.0	0.0	0.04	$g^* = 76.5$
8	54.12	0.0	0.0	56.7	0.0	0.0	2.58	0.0	0.0	2.58	
9	59.28	0.0	0.0	56.7	0.0	0.0	-2.57	0.0	0.0	2.58	Lightness gamut rel. to offset
10	64.44	0.0	0.0	64.4	0.0	0.0	-0.03	0.0	0.0	0.04	$f^* = 100.0$
11	69.6	0.0	0.0	69.6	0.0	0.0	0.0	0.0	0.0	0.01	
12	74.76	0.0	0.0	79.9	0.0	0.0	5.14	0.0	0.0	5.14	ΔL^* -gray variation
13	79.92	0.0	0.0	74.8	0.0	0.0	-5.11	0.0	0.0	5.12	$v^* = 1.69$
14	85.08	0.0	0.0	85.1	0.0	0.0	0.02	0.0	0.0	0.02	
15	90.24	0.0	0.0	90.2	0.0	0.0	-0.03	0.0	0.0	0.04	Mean lightness difference (16 steps)
16	95.4	0.0	0.0	95.4	0.0	0.0	0.0	0.0	0.0	0.01	$\Delta E^*_{CIELAB} = 1.6$
17	18.0	0.0	0.0	18.0	0.0	0.0	0.0	0.0	0.0	0.01	
18	37.35	0.0	0.0	34.78	0.0	0.0	-2.56	0.0	0.0	2.58	
19	56.7	0.0	0.0	56.7	0.0	0.0	0.0	0.0	0.0	0.01	
20	76.05	0.0	0.0	78.63	0.0	0.0	2.57	0.0	0.0	2.58	Mean lightness difference (5 steps)
21	95.4	0.0	0.0	95.4	0.0	0.0	0.0	0.0	0.0	0.01	$\Delta L^*_{CIELAB} = 1.0$
Mean colour reproduction index: $R^*_{ab,m} = 93$											

Meas.: DE18/10L/L18E00SP.PS/.PDF; Device: X=OP8c plus; ; Date: M2002-08-01, S27

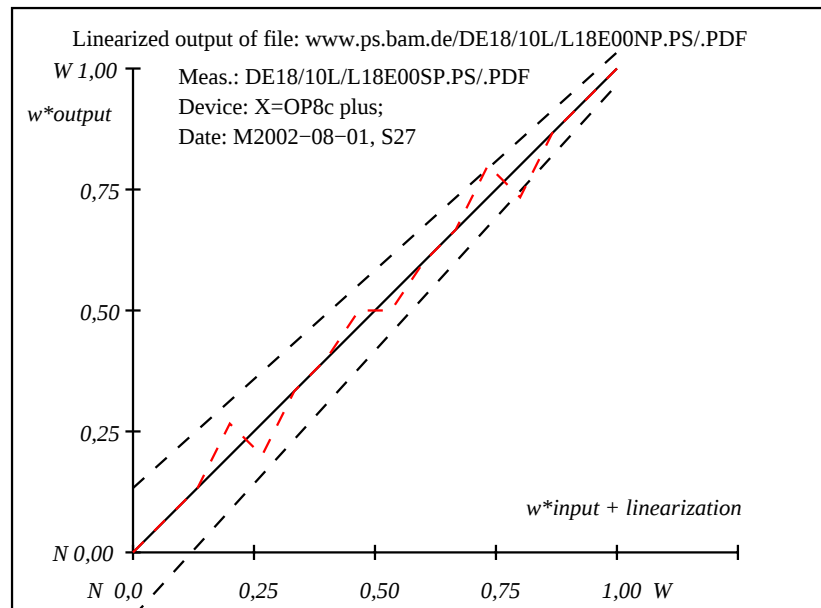

Meas.: DE18/10L/L18E00SP.PS/.PDF; Device: X=OP8c plus; ; Date: M2002-08-01, S27


Output linearization of 16 grey steps according to

ISO/IEC 15775 and
DIN 33866-X;

input: w^* setgray
output: w^* setgray

i	LAB*ref			LAB*out			LAB*out/c-ref			ΔE^*	Start output S1
1	18.0	0.0	0.0	18.0	0.0	0.0	0.0	0.0	0.0	0.01	Specification according to
2	23.16	0.0	0.0	38.0	0.0	0.0	14.84	0.0	0.0	14.84	ISO/IEC 15775 Annex G
3	28.32	0.0	0.0	46.3	0.0	0.0	17.98	0.0	0.0	17.98	and DIN 33866-1 Annex G
4	33.48	0.0	0.0	52.6	0.0	0.0	19.12	0.0	0.0	19.12	only L*-lightness used
5	38.64	0.0	0.0	58.0	0.0	0.0	19.36	0.0	0.0	19.36	$\Delta L^* = 95.4 - 18.0$
6	43.8	0.0	0.0	62.7	0.0	0.0	18.9	0.0	0.0	18.9	Regularity
7	48.96	0.0	0.0	67.0	0.0	0.0	18.04	0.0	0.0	18.04	$g^* = 28.6$
8	54.12	0.0	0.0	70.9	0.0	0.0	16.78	0.0	0.0	16.78	
9	59.28	0.0	0.0	74.5	0.0	0.0	15.22	0.0	0.0	15.22	Lightness gamut rel. to offset
10	64.44	0.0	0.0	78.0	0.0	0.0	13.56	0.0	0.0	13.56	$f^* = 100.0$
11	69.6	0.0	0.0	81.2	0.0	0.0	11.6	0.0	0.0	11.6	
12	74.76	0.0	0.0	83.4	0.0	0.0	8.64	0.0	0.0	8.64	ΔL^* -gray variation
13	79.92	0.0	0.0	87.2	0.0	0.0	7.28	0.0	0.0	7.28	$v^* = 0.0$
14	85.08	0.0	0.0	90.1	0.0	0.0	5.02	0.0	0.0	5.02	
15	90.24	0.0	0.0	92.8	0.0	0.0	2.56	0.0	0.0	2.56	Mean lightness difference (16 steps)
16	95.4	0.0	0.0	95.4	0.0	0.0	0.0	0.0	0.0	0.01	$\Delta E^*_{CIELAB} = 11.8$
17	18.0	0.0	0.0	18.0	0.0	0.0	0.0	0.0	0.0	0.01	
18	37.35	0.0	0.0	56.65	0.0	0.0	19.3	0.0	0.0	19.3	
19	56.7	0.0	0.0	72.7	0.0	0.0	16.0	0.0	0.0	16.0	
20	76.05	0.0	0.0	84.35	0.0	0.0	8.3	0.0	0.0	8.3	Mean lightness difference (5 steps)
21	95.4	0.0	0.0	95.4	0.0	0.0	0.0	0.0	0.0	0.01	$\Delta L^*_{CIELAB} = 8.7$
Mean colour reproduction index: $R^*_{ab,m} = 49$											


Meas.: DE18/10L/L18E00NP.PS/.PDF; Device: X=OP8c plus; ; Date: M2002-08-01

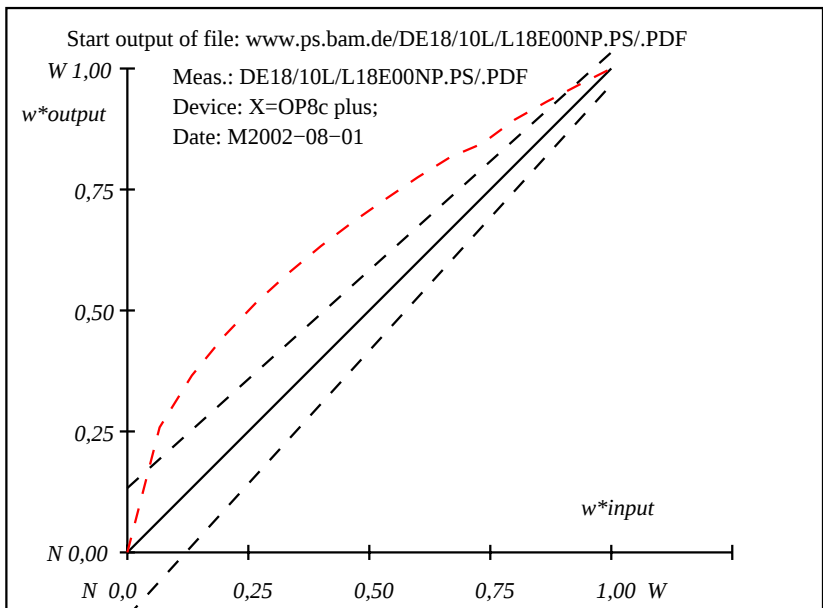

Meas.: DE18/10L/L18E00NP.PS/.PDF; Device: X=OP8c plus; ; Date: M2002-08-01

i	LAB*ref			LAB*out			LAB*out/c-ref			ΔE^*	Linearized output S2
1	18.0	0.0	0.0	18.0	0.0	0.0	0.0	0.0	0.0	0.01	Specification according to
2	23.16	0.0	0.0	23.2	0.0	0.0	0.04	0.0	0.0	0.04	ISO/IEC 15775 Annex G
3	28.32	0.0	0.0	28.3	0.0	0.0	-0.01	0.0	0.0	0.02	and DIN 33866-1 Annex G
4	33.48	0.0	0.0	38.6	0.0	0.0	5.12	0.0	0.0	5.12	only L*-lightness used
5	38.64	0.0	0.0	33.5	0.0	0.0	-5.13	0.0	0.0	5.14	$\Delta L^* = 95.4 - 18.0$
6	43.8	0.0	0.0	43.8	0.0	0.0	0.0	0.0	0.0	0.01	Regularity
7	48.96	0.0	0.0	49.0	0.0	0.0	0.04	0.0	0.0	0.04	$g^* = 28.6$
8	54.12	0.0	0.0	56.7	0.0	0.0	2.58	0.0	0.0	2.58	
9	59.28	0.0	0.0	56.7	0.0	0.0	-2.57	0.0	0.0	2.58	Lightness gamut rel. to offset
10	64.44	0.0	0.0	64.4	0.0	0.0	-0.03	0.0	0.0	0.04	$f^* = 100.0$
11	69.6	0.0	0.0	69.6	0.0	0.0	0.0	0.0	0.0	0.01	
12	74.76	0.0	0.0	79.9	0.0	0.0	5.14	0.0	0.0	5.14	ΔL^* -gray variation
13	79.92	0.0	0.0	74.8	0.0	0.0	-5.11	0.0	0.0	5.12	$v^* = 1.69$
14	85.08	0.0	0.0	85.1	0.0	0.0	0.02	0.0	0.0	0.02	
15	90.24	0.0	0.0	90.2	0.0	0.0	-0.03	0.0	0.0	0.04	Mean lightness difference (16 steps)
16	95.4	0.0	0.0	95.4	0.0	0.0	0.0	0.0	0.0	0.01	$\Delta E^*_{CIELAB} = 1.6$
17	18.0	0.0	0.0	18.0	0.0	0.0	0.0	0.0	0.0	0.01	
18	37.35	0.0	0.0	34.78	0.0	0.0	-2.56	0.0	0.0	2.58	
19	56.7	0.0	0.0	56.7	0.0	0.0	0.0	0.0	0.0	0.01	
20	76.05	0.0	0.0	78.63	0.0	0.0	2.57	0.0	0.0	2.58	Mean lightness difference (5 steps)
21	95.4	0.0	0.0	95.4	0.0	0.0	0.0	0.0	0.0	0.01	$\Delta L^*_{CIELAB} = 1.0$
Mean colour reproduction index: $R^*_{ab,m} = 93$											

Meas.: DE18/10L/L18E00SP.PS/.PDF; Device: X=OP8c plus; ; Date: M2002-08-01, S28

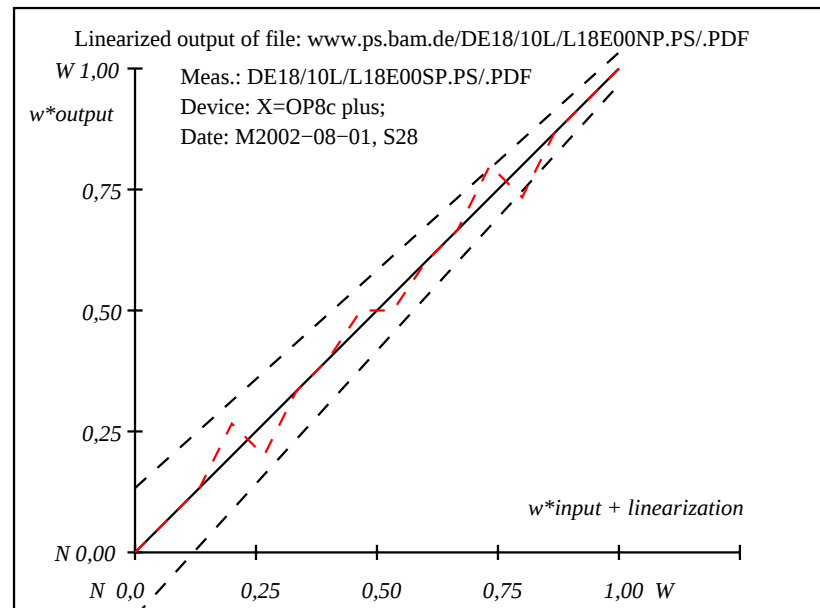

Meas.: DE18/10L/L18E00SP.PS/.PDF; Device: X=OP8c plus; ; Date: M2002-08-01, S28


Output linearization of 16 grey steps according to

ISO/IEC 15775 and
DIN 33866-X;

input: w^* setgray
output: w^* setgray

i	LAB*ref			LAB*out			LAB*out/c-ref			ΔE^*	Start output S1
1	18.0	0.0	0.0	18.0	0.0	0.0	0.0	0.0	0.0	0.01	Specification according to
2	23.16	0.0	0.0	38.0	0.0	0.0	14.84	0.0	0.0	14.84	ISO/IEC 15775 Annex G
3	28.32	0.0	0.0	46.3	0.0	0.0	17.98	0.0	0.0	17.98	and DIN 33866-1 Annex G
4	33.48	0.0	0.0	52.6	0.0	0.0	19.12	0.0	0.0	19.12	only L*-lightness used
5	38.64	0.0	0.0	58.0	0.0	0.0	19.36	0.0	0.0	19.36	$\Delta L^* = 95.4 - 18.0$
6	43.8	0.0	0.0	62.7	0.0	0.0	18.9	0.0	0.0	18.9	Regularity
7	48.96	0.0	0.0	67.0	0.0	0.0	18.04	0.0	0.0	18.04	$g^* = 28.6$
8	54.12	0.0	0.0	70.9	0.0	0.0	16.78	0.0	0.0	16.78	
9	59.28	0.0	0.0	74.5	0.0	0.0	15.22	0.0	0.0	15.22	Lightness gamut rel. to offset
10	64.44	0.0	0.0	78.0	0.0	0.0	13.56	0.0	0.0	13.56	$f^* = 100.0$
11	69.6	0.0	0.0	81.2	0.0	0.0	11.6	0.0	0.0	11.6	
12	74.76	0.0	0.0	83.4	0.0	0.0	8.64	0.0	0.0	8.64	ΔL^* -gray variation
13	79.92	0.0	0.0	87.2	0.0	0.0	7.28	0.0	0.0	7.28	$v^* = 0.0$
14	85.08	0.0	0.0	90.1	0.0	0.0	5.02	0.0	0.0	5.02	
15	90.24	0.0	0.0	92.8	0.0	0.0	2.56	0.0	0.0	2.56	Mean lightness difference (16 steps)
16	95.4	0.0	0.0	95.4	0.0	0.0	0.0	0.0	0.0	0.01	$\Delta E^*_{CIELAB} = 11.8$
17	18.0	0.0	0.0	18.0	0.0	0.0	0.0	0.0	0.0	0.01	
18	37.35	0.0	0.0	56.65	0.0	0.0	19.3	0.0	0.0	19.3	
19	56.7	0.0	0.0	72.7	0.0	0.0	16.0	0.0	0.0	16.0	
20	76.05	0.0	0.0	84.35	0.0	0.0	8.3	0.0	0.0	8.3	Mean lightness difference (5 steps)
21	95.4	0.0	0.0	95.4	0.0	0.0	0.0	0.0	0.0	0.01	$\Delta L^*_{CIELAB} = 8.7$
Mean colour reproduction index: $R^*_{ab,m} = 49$											


Meas.: DE18/10L/L18E00NP.PS/.PDF; Device: X=OP8c plus; ; Date: M2002-08-01

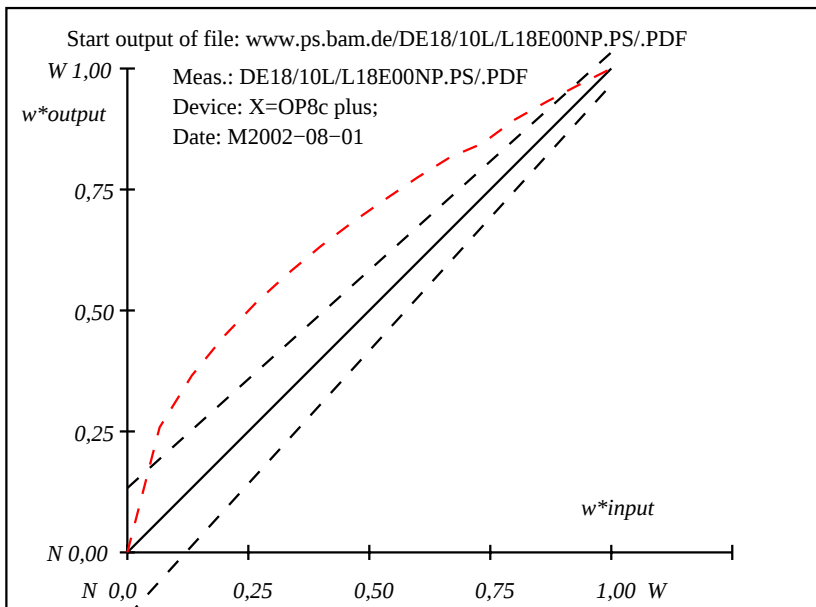

Meas.: DE18/10L/L18E00NP.PS/.PDF; Device: X=OP8c plus; ; Date: M2002-08-01

i	LAB*ref			LAB*out			LAB*out/c-ref			ΔE^*	Linearized output S2
1	18.0	0.0	0.0	18.0	0.0	0.0	0.0	0.0	0.0	0.01	Specification according to
2	23.16	0.0	0.0	23.2	0.0	0.0	0.04	0.0	0.0	0.04	ISO/IEC 15775 Annex G
3	28.32	0.0	0.0	28.3	0.0	0.0	-0.01	0.0	0.0	0.02	and DIN 33866-1 Annex G
4	33.48	0.0	0.0	43.8	0.0	0.0	10.32	0.0	0.0	10.32	only L*-lightness used
5	38.64	0.0	0.0	38.6	0.0	0.0	-0.03	0.0	0.0	0.04	$\Delta L^* = 95.4 - 18.0$
6	43.8	0.0	0.0	33.5	0.0	0.0	-10.29	0.0	0.0	10.3	Regularity
7	48.96	0.0	0.0	49.0	0.0	0.0	0.04	0.0	0.0	0.04	$g^* = 52.8$
8	54.12	0.0	0.0	64.4	0.0	0.0	10.28	0.0	0.0	10.28	
9	59.28	0.0	0.0	59.3	0.0	0.0	0.02	0.0	0.0	0.02	Lightness gamut rel. to offset
10	64.44	0.0	0.0	54.1	0.0	0.0	-10.33	0.0	0.0	10.34	$f^* = 100.0$
11	69.6	0.0	0.0	69.6	0.0	0.0	0.0	0.0	0.0	0.01	
12	74.76	0.0	0.0	85.1	0.0	0.0	10.34	0.0	0.0	10.34	ΔL^* -gray variation
13	79.92	0.0	0.0	79.9	0.0	0.0	-0.01	0.0	0.0	0.02	$v^* = 0.0$
14	85.08	0.0	0.0	74.8	0.0	0.0	-10.27	0.0	0.0	10.28	
15	90.24	0.0	0.0	90.2	0.0	0.0	-0.03	0.0	0.0	0.04	Mean lightness difference (16 steps)
16	95.4	0.0	0.0	95.4	0.0	0.0	0.0	0.0	0.0	0.01	$\Delta E^*_{CIELAB} = 3.9$
17	18.0	0.0	0.0	18.0	0.0	0.0	0.0	0.0	0.0	0.01	
18	37.35	0.0	0.0	39.9	0.0	0.0	2.55	0.0	0.0	2.55	
19	56.7	0.0	0.0	61.85	0.0	0.0	5.15	0.0	0.0	5.15	
20	76.05	0.0	0.0	83.8	0.0	0.0	7.75	0.0	0.0	7.75	Mean lightness difference (5 steps)
21	95.4	0.0	0.0	95.4	0.0	0.0	0.0	0.0	0.0	0.01	$\Delta L^*_{CIELAB} = 3.1$
Mean colour reproduction index: $R^*_{ab,m} = 83$											

Meas.: DE18/10L/L18E00SP.PS/.PDF; Device: X=OP8c plus; ; Date: M2002-08-01, S29

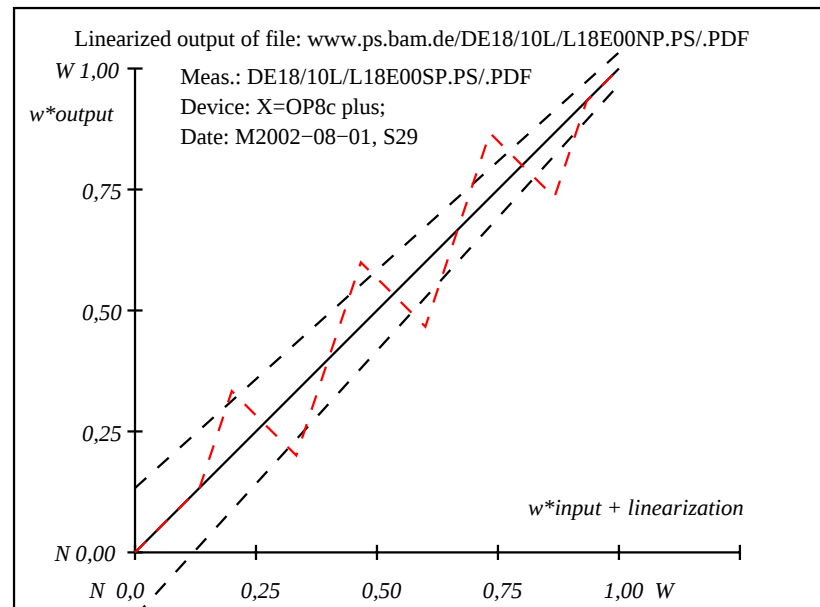

Meas.: DE18/10L/L18E00SP.PS/.PDF; Device: X=OP8c plus; ; Date: M2002-08-01, S29

Output linearization of 16 grey steps according to

ISO/IEC 15775 and
DIN 33866-X;

input: w^* setgray
output: w^* setgray