

www.ps.bam.de/DE37/10T/T10E00EP.PS/.PDF; Input Linearization (IL): olv* setcolortransfer; Simulation















E: Output Linearization (OL) data DE37/10T/OUTLINEP.PS/.PDF of PostScript Device (D)



BAM registration: 20010501-DE37/10T/T10E00EP.PS/.PDF

Technical information: <http://o2.ps.bam.de>

Exposure variation, slide and negative film (sf, nf)

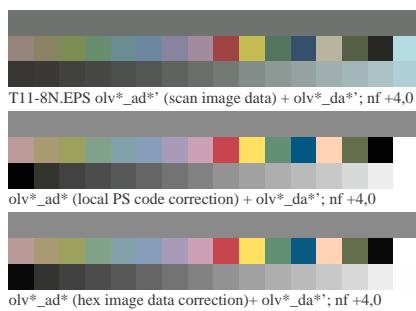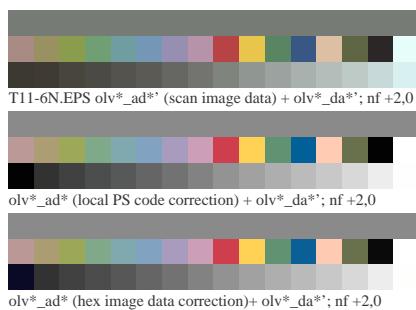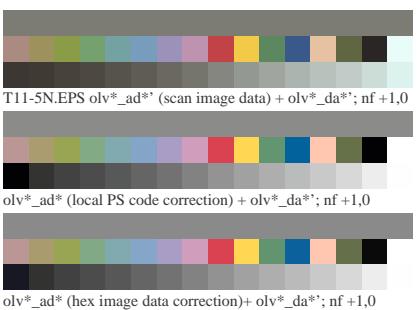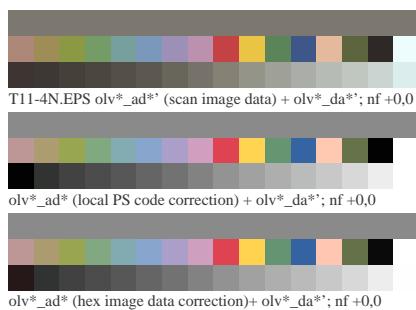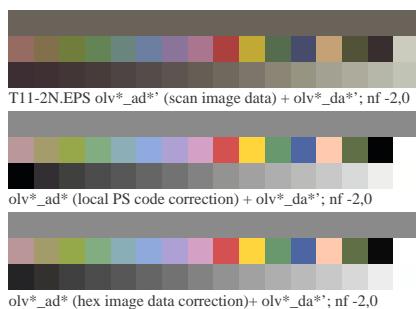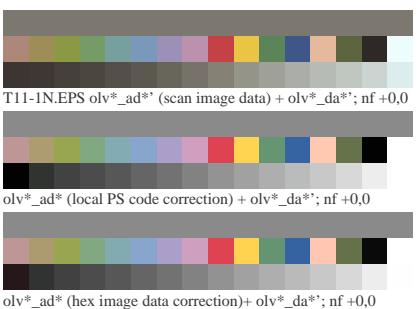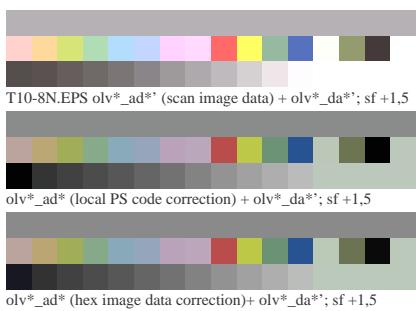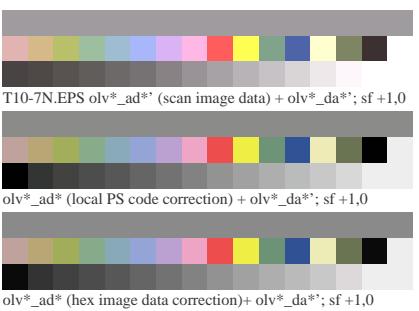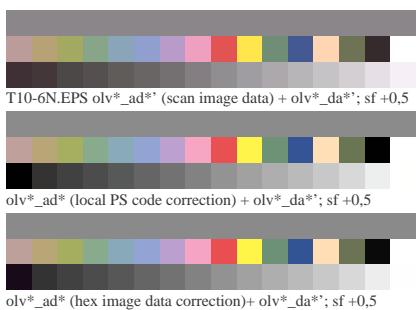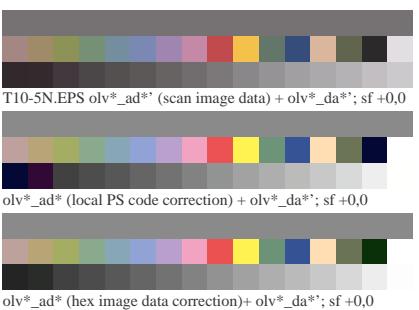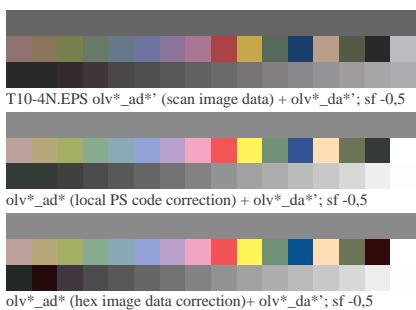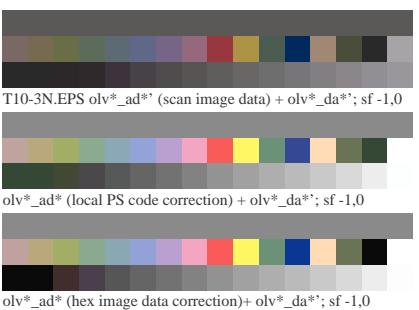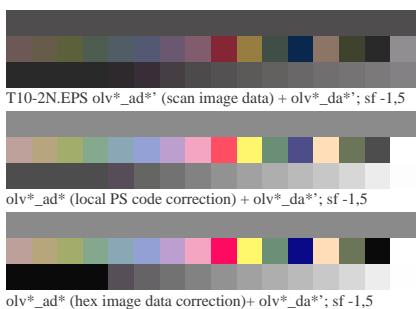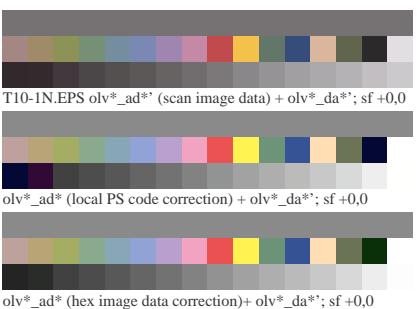

Test chart no. 3700 for input and output (IL, OL): Input Hex data correction by inverse setcolortransfer

