

www.ps.bam.de/DE46/10T/T10E00DP.PS/.PDF; Input LM by cmy*, CMY* setcolortransfer











D: Output sqrt Linearization Method (LM) data DE46/10T/OUTLINDP.PS/.PDF in PostScript Device (D)

Technical information: <http://o2.ps.bam.de>

Exposure variation, slide and negative film (sf, nf)

BAM registration: 20010501-DE46/10T/T10E00DP.PS/.PDF

BAM material: code=rha4ra

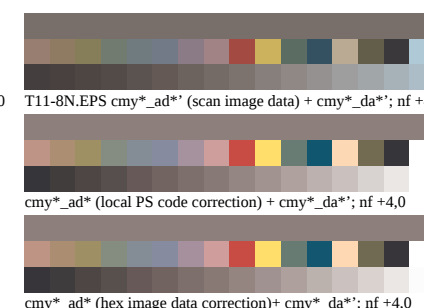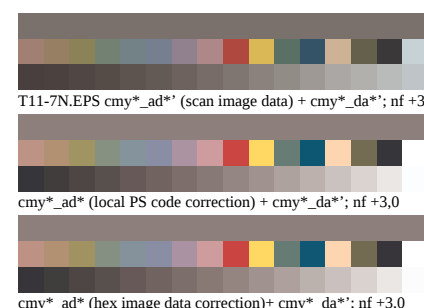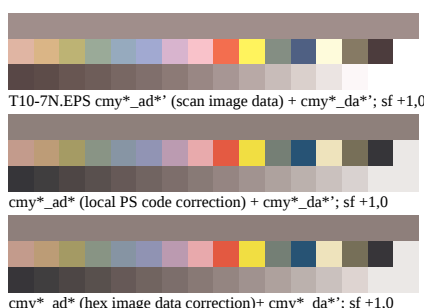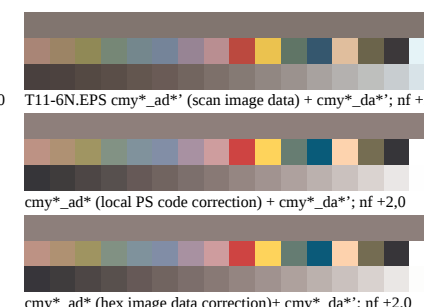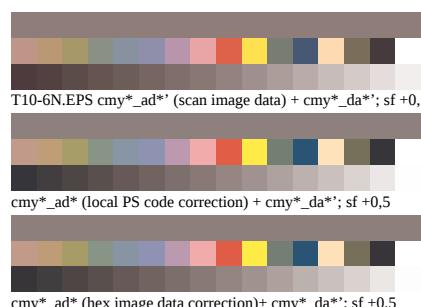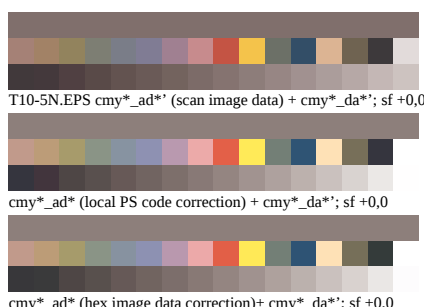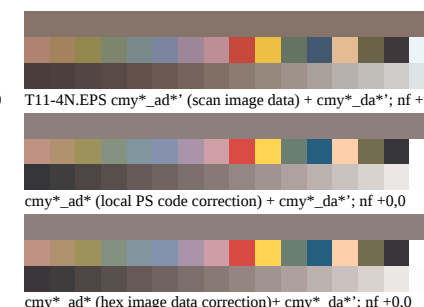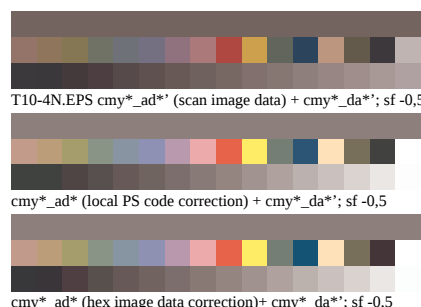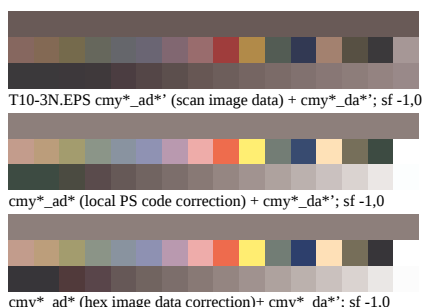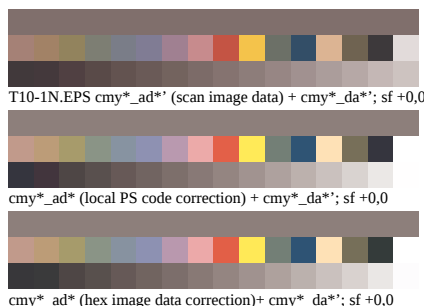

Test chart no. 4600 for input and output LM: Input Hex and PS correction by inverse setcolortransfer