

Figure C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS operator: 000n* setcmykcolor

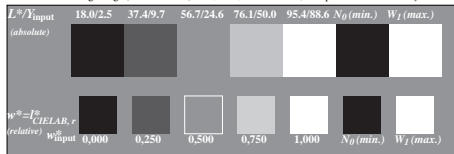


Figure C2: 5 visual equidistant L^* -gray steps + N_0 + W_1 ; PS operator: 000n* setcmykcolor

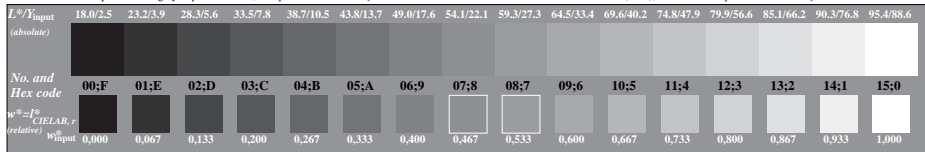


Figure C3: 16 visual equidistant L^* -gray steps; PS operator: 000n* setcmykcolor

ISO/IEC-test chart no. 3 according to

ISO/IEC 15775 and
DIS ISO/IEC 19839-X;

input: 000n*lin 1.0 exp setcmykcolor
output: 000n*lin 1.0 exp setcmykcolor

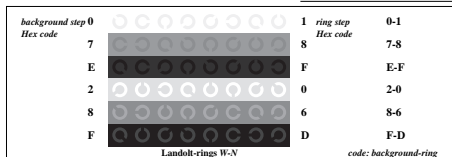


Figure C4: Landolt-rings W-N; PS operator: 000n* setcmykcolor

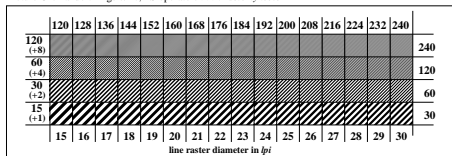


Figure C5: Line raster under 45° (or 135°); PS operator: 000n* setcmykcolor

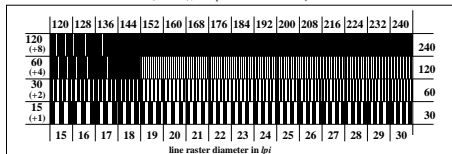


Figure C6: Line raster under 90° (or 0°); Use of the PS operator 000n* setcmykcolor