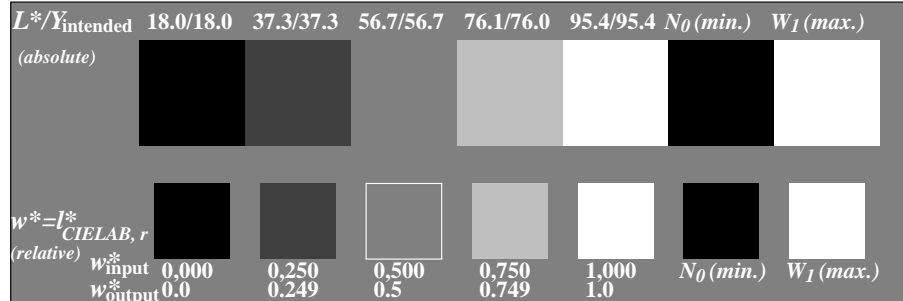
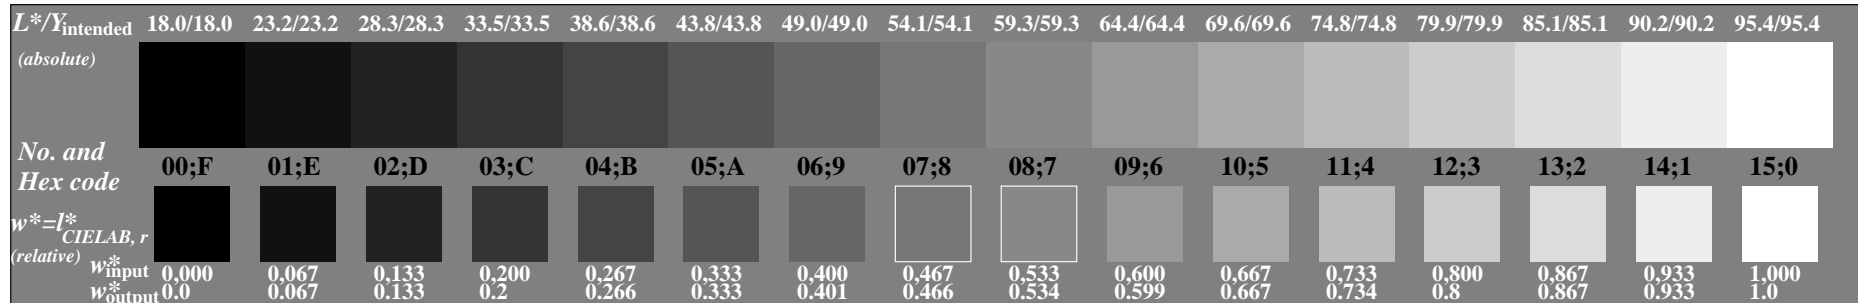
Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS operator: *w*lin 1.0 exp setgray*Picture C2: 5 visual equidistant L^* -grey steps + N_0 + W_I ; PS operator: *w*lin 1.0 exp setgray*Picture C3: 16 visual equidistant L^* -grey steps; PS operator: *w*lin 1.0 exp setgray*

ISO/IEC-test chart no. 3 according to

ISO/IEC 15775 and
DIS ISO/IEC 19839-X;input: *w*lin 1.0 exp setgray*output: *Startup (S) data dependenddepends on Distiller Startup*

<i>background step 0</i>		<i>1 ring step</i>	<i>0-1</i>
<i>Hex code</i>		<i>Hex code</i>	
7		8	7-8
E		F	E-F
2		0	2-0
8		6	8-6
F		D	F-D

Landolt-rings W-N code: background-ring

Picture C4: Landolt-rings W-N; PS operator: *w*lin 1.0 exp setgray*

	120	128	136	144	152	160	168	176	184	192	200	208	216	224	232	240	
120 (+8)																	240
60 (+4)																	120
30 (+2)																	60
15 (+1)																	30
	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	

line raster diameter in *lpi*

Picture C5: Line raster under 45° (or 135°); PS operator: *w*lin 1.0 exp setgray*

	120	128	136	144	152	160	168	176	184	192	200	208	216	224	232	240	
120 (+8)																	240
60 (+4)																	120
30 (+2)																	60
15 (+1)																	30
	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	

line raster diameter in *lpi*

Picture C6: Line raster under 90° (or 0°); PS operator: *w*lin 1.0 exp setgray*