



Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS operator:  $w^*_{lin} 1.0 \exp setgray$

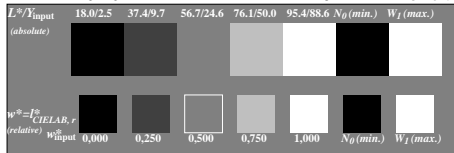


Picture C2: 5 visual equidistant  $L^*$ -gray steps +  $N_0$  +  $W_1$ ; PS operator:  $w^*_{lin} 1.0 \exp setgray$

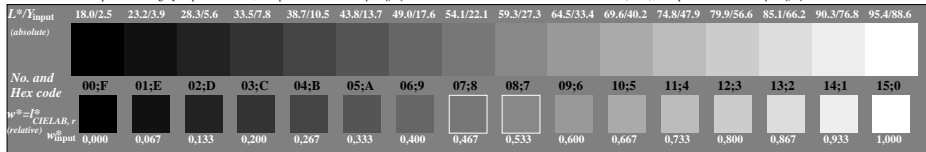


Picture C3: 16 visual equidistant  $L^*$ -gray steps; PS operator:  $w^*_{lin} 1.0 \exp setgray$

ISO/IEC-test chart no. 3 according to


ISO/IEC 15775 and  
DIS ISO/IEC 19839-X; input:  $w^*_{lin} 1.0 \exp setgray$   
output:  $w^*_{lin} 1.0 \exp setgray$

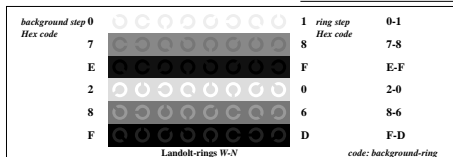

Picture C4: Landolt-rings W-N; PS operator:  $w^*_{lin} 1.0 \exp setgray$

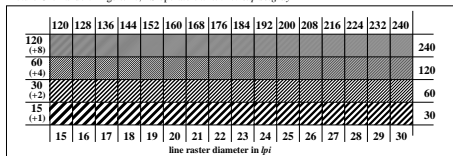

Picture C5: Line raster under 45° (or 135°); PS operator:  $w^*_{lin} 1.0 \exp setgray$

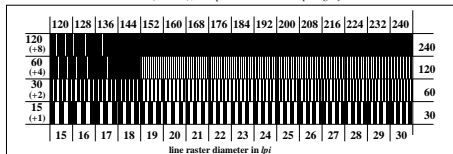

Picture C6: Line raster under 90° (or 0°); PS operator:  $w^*_{lin} 1.0 \exp setgray$