



See for similar files: <http://www.ps.bam.de/DE89/DE89.HTM>  
Information and Order: <http://www.ps.bam.de> Version 2.0, io=3.3


BAM registration: 20021201-DE89/10L/L89E11NP.PS/.PDF BAM material: code=rh4ta  
Top part of page: application for monitors and printers

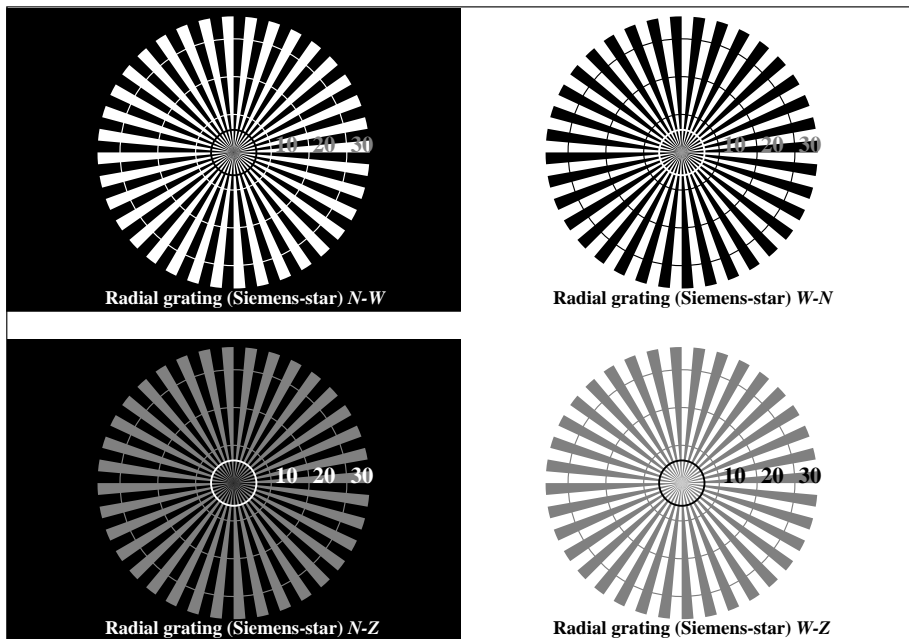

Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS operator: `www* setrgbcolor`

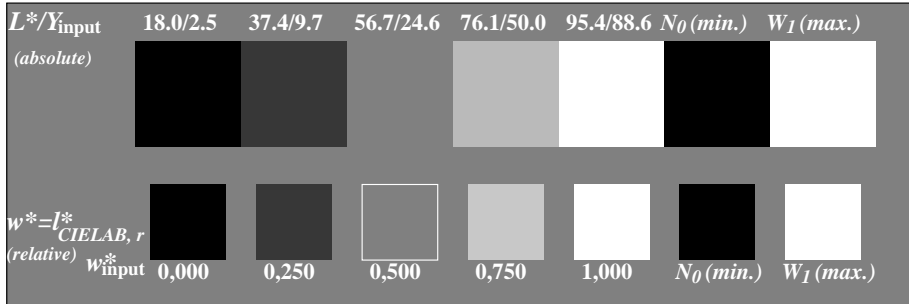


Picture C2: 5 visual equidistant  $L^*$ -grey steps +  $N_0$  +  $W_1$ ; PS operator: `www* setrgbcolor`




Picture C3: 16 visual equidistant  $L^*$ -grey steps; PS operator: `www* setrgbcolor`; use file [www.bam.de/DE86/10L/L86E12NA.PS](http://www.bam.de/DE86/10L/L86E12NA.PS) for DPS systems or [L87E12NP.PS](http://www.bam.de/DE87E12NP.PS) for PDF systems to complete the figure


ISO/IEC-test chart no. 3 according to ISO/IEC 15775 and DIS ISO/IEC 19839-X; input: `www* setrgbcolor`  
output: `www* setrgbcolor`

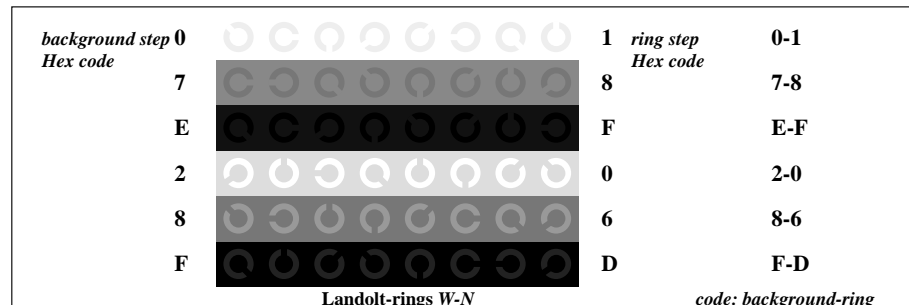

Picture C4: Landolt-rings W-N; PS operator: `www* setrgbcolor`

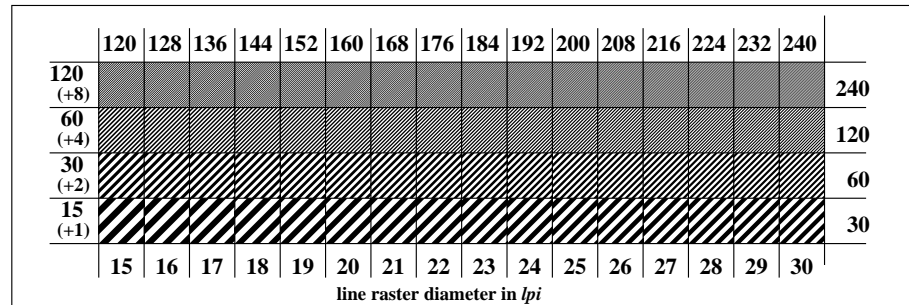

Picture C5: Line raster under 45° (or 135°); PS operator: `www* setrgbcolor`

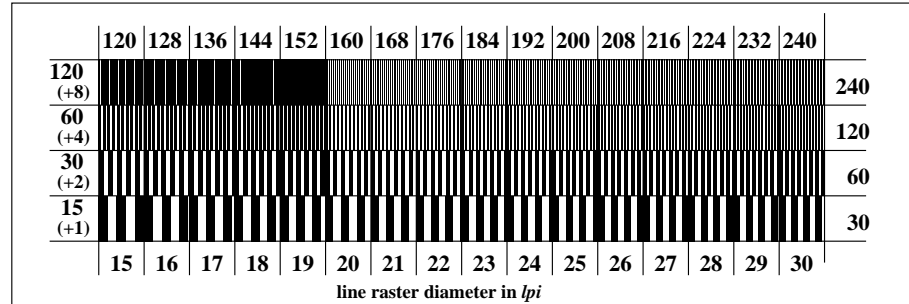

Picture C6: Line raster under 90° (or 0°); Use of the PS operator `www* setrgbcolor`