






www.ps.bam.de/DE93/10L/L93E06FP.PS/.PDF; linearized output  
F: Output Linearization (OL) data DE93/10L/L93E06FP.DAT in File (F)

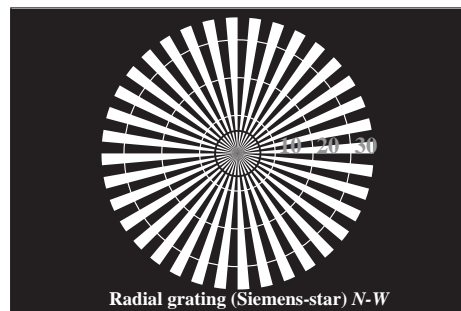


Radial grating (Siemens-star) N-W



Radial grating (Siemens-star) W-N

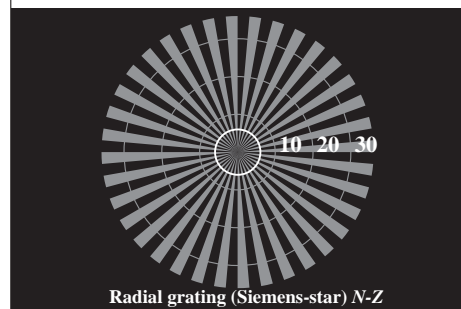


Radial grating (Siemens-star) N-Z




Radial grating (Siemens-star) W-Z

Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; Use of the PS operator *LAB\* setcolor*

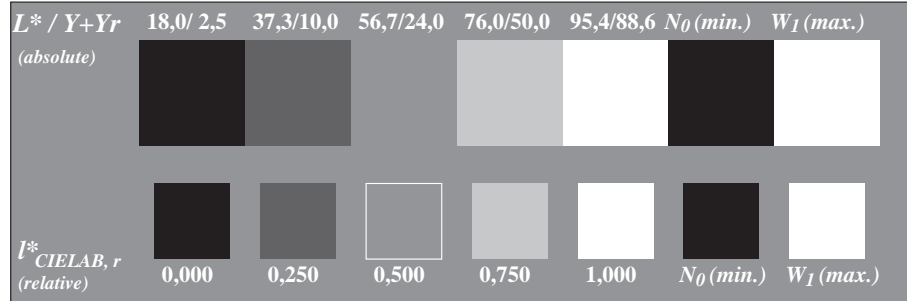

Picture C2: 5 visual equidistant  $L^*$ -grey steps +  $N_0$  +  $W_1$ ; Use of the PS operator *LAB\* setcolor*

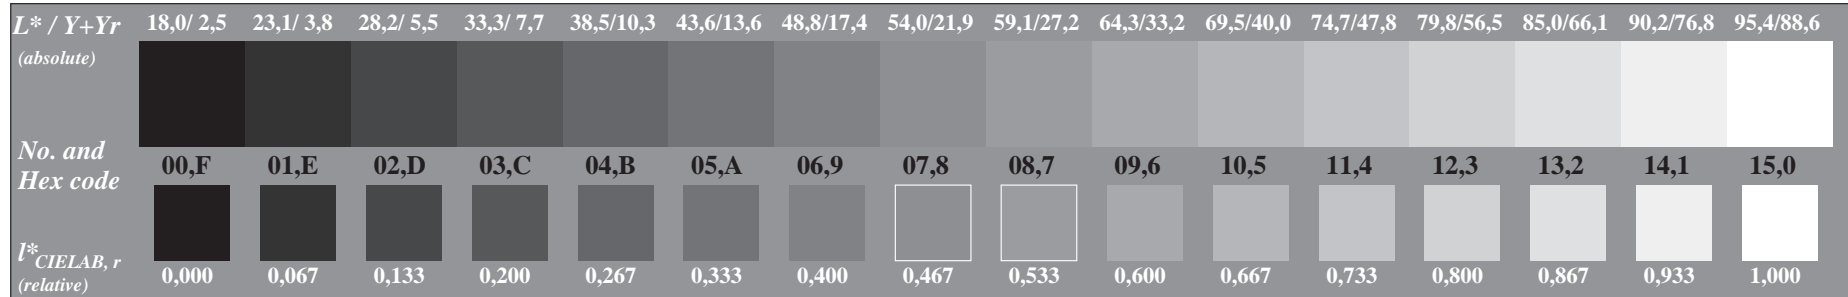


Picture C3: 16 visual equidistant  $L^*$ -grey steps; Use of the PS operator *LAB\* setcolor*




Fig. C1 to C6 of ISO/IEC-test chart 3;


ISO/IEC 15775 and input: *LAB\* setcolor*  
DIS ISO/IEC 19839-X; output: *000n\* setcmykcolor*

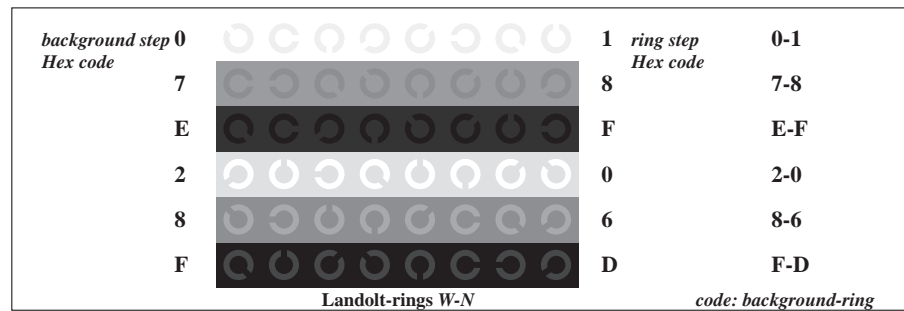

Picture C4: Landolt-rings W-N; Use of the PS operator *LAB\* setcolor*

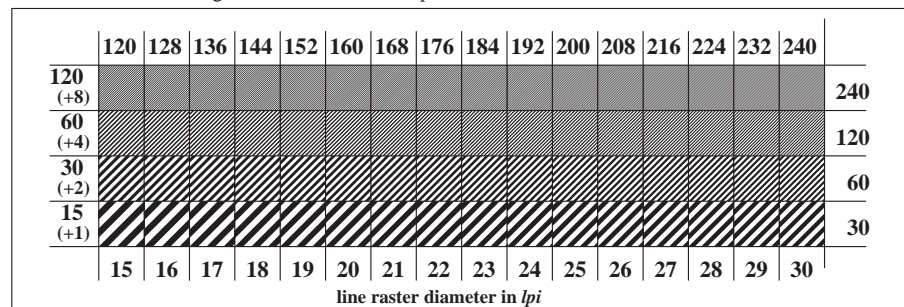

Picture C5: Line raster under 45° (or 135°); Use of the PS operator *LAB\* setcolor*

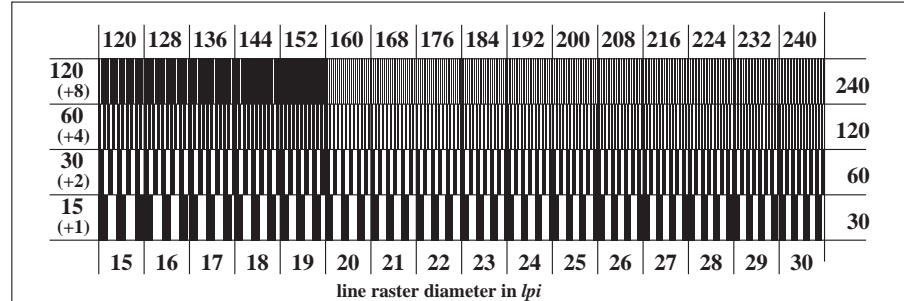

Picture C6: Line raster under 90° (or 0°); Use of the PS operator *LAB\* setcolor*