


See for similar files: <http://www.ps.bam.de/DE95/DE95.HTM>  
Information and Order: <http://www.ps.bam.de> Version 2.0, io=0,7; iORS; oORS, CIELAB

BAM registration: 20030101-DE95/100/O95E07FP.PS/.PDF BAM material: code=rha4ta  
application for measurement of monitor (Yr=2.5) and printer output

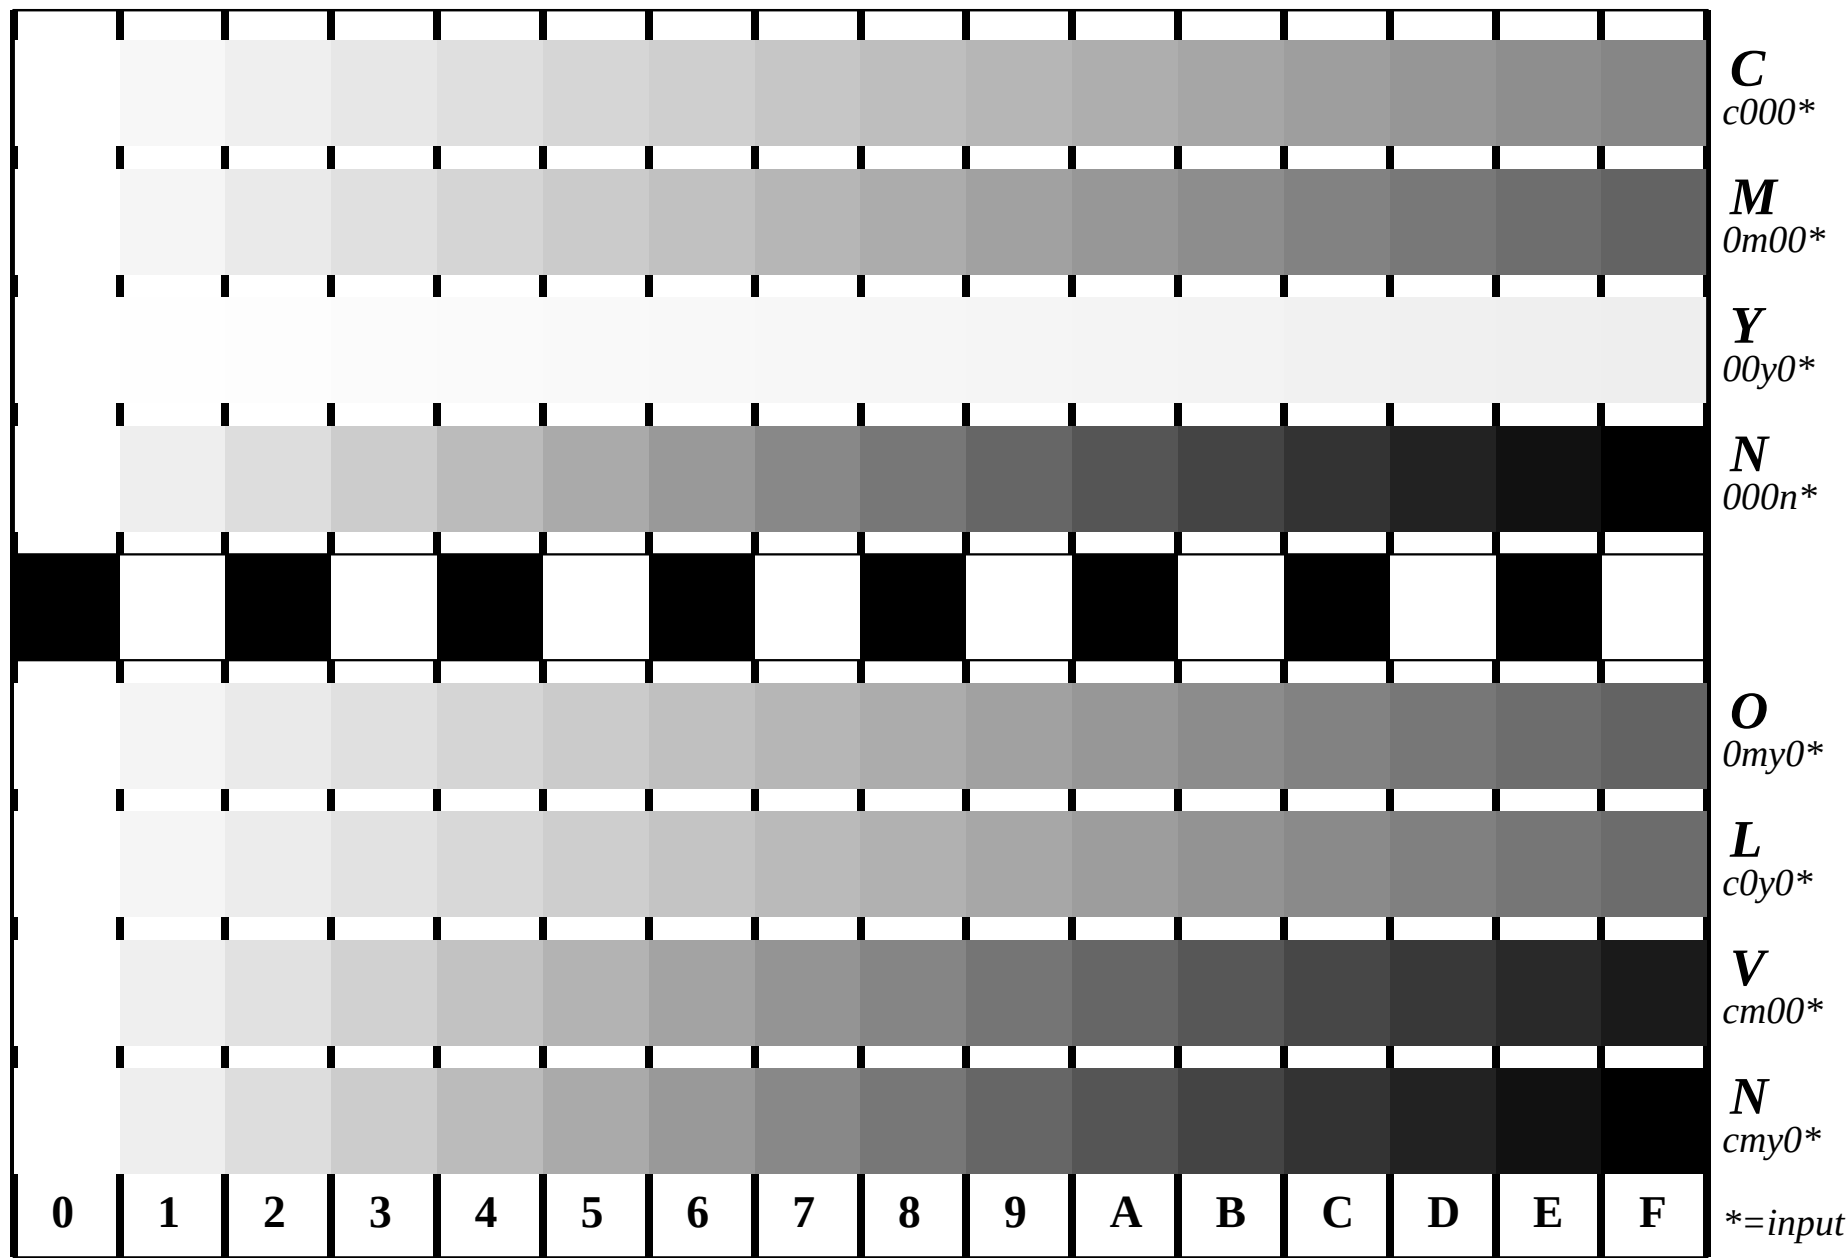

Picture B4 and D4: 16 equidistant steps **B4**: W-C, W-M, W-Y and W-N; **D4**: W-O, W-L, W-V and W-N(CMY); Use of PS operator; B4:  $\text{cmy0}^* / 000n^* \text{ setcmykcolor}$ ; D4:  $\text{cmy0}^* \text{ setcmykcolor}$  (only)

Fig. B4 of ISO/IEC-test chart 2 and  
Fig. D4 of ISO/IEC-test chart no. 4;

ISO/IEC 15775 and  
TR ISO/IEC 24705;

input:  $\text{cmy}n^* \text{ setcmykcolor}$   
output:  $w^* \text{ setgray}$