


See for similar files: <http://www.ps.bam.de/DE95/DE95.HTM>
Information and Order: <http://www.ps.bam.de> Version 2.0, io=0,0; iORS; oORS; CIELAB

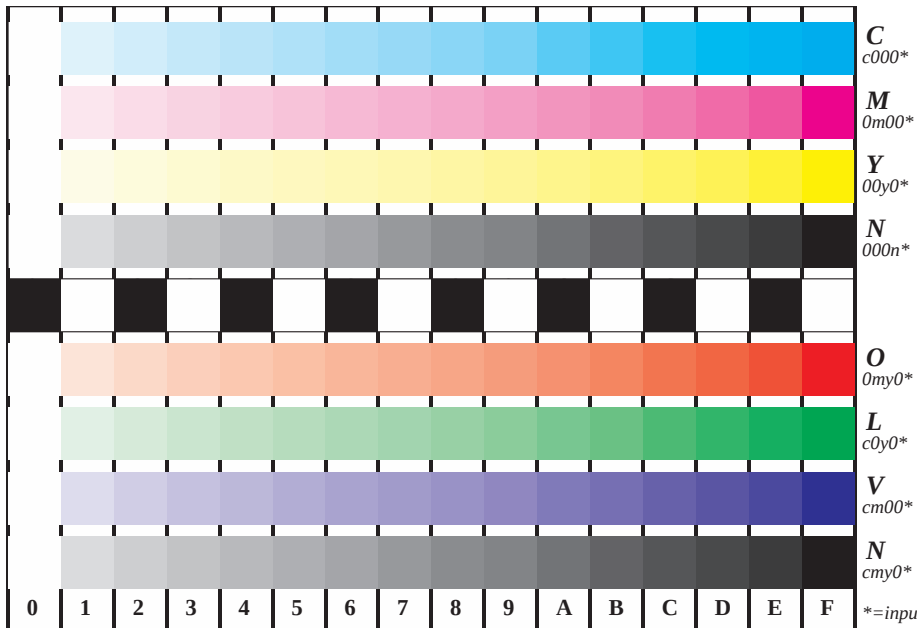

Picture B4 and D4: 16 equidistant steps B4: W-C, W-M, W-Y and W-N; D4: W-O, W-L, W-V and W-N(CMY); Use of PS operator; B4: $\text{cmy0}^* / 000n^* \text{ setcmykcolor}$; D4: $\text{cmy0}^* \text{ setcmykcolor}$ (only)

Fig. B4 of ISO/IEC-test chart 2 and
Fig. D4 of ISO/IEC-test chart no. 4;

ISO/IEC 15775 and
TR ISO/IEC 24705;

input: $\text{cmy}n^* \text{ setcmykcolor}$
output: $\text{cmy0}^* / 000n^* \text{ setcmykcolor}$

BAM registration: 20030101-DE95/T95E00F1.PS/.TXT
BAM material: code=th4ta
application for measurement of monitor (Yr=2.5) and printer output