


| i  | LAB*ref | LAB*out | LAB*out/c-ref | $\Delta E^*$ | Start-Ausgabe S1                                  |
|----|---------|---------|---------------|--------------|---------------------------------------------------|
| 1  | 23.23   | 0.0     | 0.0           | 0.01         | Kennzeichnung nach                                |
| 2  | 27.91   | 0.0     | 0.0           | 1.65         | ISO/IEC 15775 Anhang G                            |
| 3  | 32.59   | 0.0     | 0.0           | 2.13         | und DIN 33866-1 Anhang G                          |
| 4  | 37.27   | 0.0     | 0.0           | 4.12         | nur $L^*$ -Helligkeit benutzt                     |
| 5  | 41.95   | 0.0     | 0.0           | 2.23         | $\Delta L^* = 93.43 - 23.23$                      |
| 6  | 46.63   | 0.0     | 0.0           | 1.31         | Gleichmaessigkeit                                 |
| 7  | 51.31   | 0.0     | 0.0           | 4.07         | $g^* = 77.1$                                      |
| 8  | 55.99   | 0.0     | 0.0           | 1.64         |                                                   |
| 9  | 60.67   | 0.0     | 0.0           | 1.54         | Helligkeitsumfang rel. zu Offset                  |
| 10 | 65.35   | 0.0     | 0.0           | 3.48         | $f^* = 90.7$                                      |
| 11 | 70.03   | 0.0     | 0.0           | 2.55         |                                                   |
| 12 | 74.71   | 0.0     | 0.0           | 2.18         | $\Delta L^*$ -Grauvariation                       |
| 13 | 79.39   | 0.0     | 0.0           | 1.19         | $v^* = 0.0$                                       |
| 14 | 84.07   | 0.0     | 0.0           | 1.56         |                                                   |
| 15 | 88.75   | 0.0     | 0.0           | 1.03         | Mittlerer Helligkeitsabstand (16 Stufen)          |
| 16 | 93.43   | 0.0     | 0.0           | 0.01         | $\Delta E^*_{CIELAB} = 1.9$                       |
| 17 | 23.23   | 0.0     | 0.0           | 0.01         |                                                   |
| 18 | 40.78   | 0.0     | 0.0           | 2.7          |                                                   |
| 19 | 58.33   | 0.0     | 0.0           | 1.59         |                                                   |
| 20 | 75.88   | 0.0     | 0.0           | 1.93         | Mittlerer Helligkeitsabstand (5 Stufen)           |
| 21 | 93.43   | 0.0     | 0.0           | 0.01         | $\Delta L^*_{CIELAB} = 1.2$                       |
|    |         |         |               |              | Mittlerer Farbwiedergabe-Index: $R^*_{ab,m} = 92$ |

Device: (A); Meas.: A10GS1A.PS/.TXT; Date: M010301

[www.ps.bam.de/DG02/10A/A10GS1A.PS/.TXT](http://www.ps.bam.de/DG02/10A/A10GS1A.PS/.TXT)

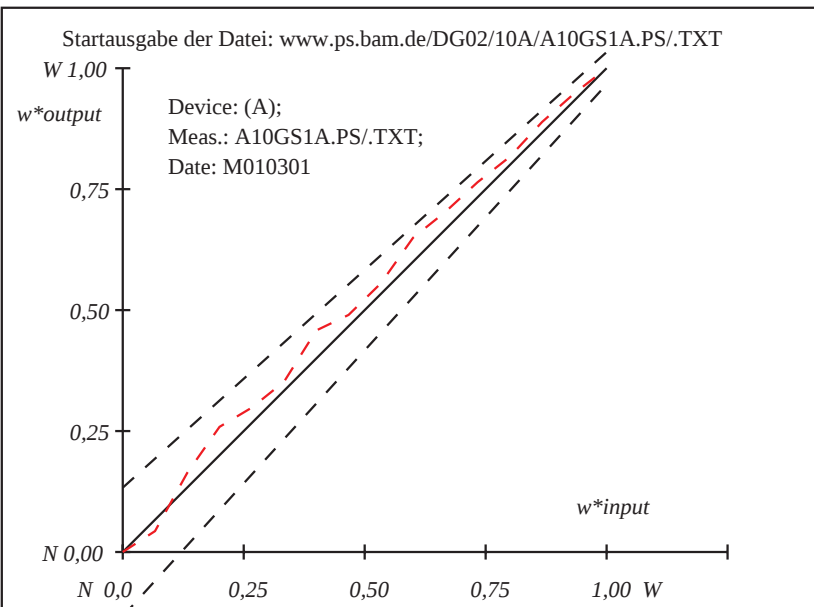


Device: (A); Meas.: A10GS1A.PS/.TXT; Date: M010301

[www.ps.bam.de/DG02/10A/A10GS1A.PS/.TXT](http://www.ps.bam.de/DG02/10A/A10GS1A.PS/.TXT)

| i  | LAB*ref | LAB*out | LAB*out/c-ref | $\Delta E^*$ | Linearisierte Ausgabe S2                          |
|----|---------|---------|---------------|--------------|---------------------------------------------------|
| 1  | 22.62   | 0.0     | 0.0           | 0.01         | Kennzeichnung nach                                |
| 2  | 27.35   | 0.0     | 0.0           | 0.04         | ISO/IEC 15775 Anhang G                            |
| 3  | 32.07   | 0.0     | 0.0           | 0.67         | und DIN 33866-1 Anhang G                          |
| 4  | 36.8    | 0.0     | 0.0           | 1.72         | nur $L^*$ -Helligkeit benutzt                     |
| 5  | 41.52   | 0.0     | 0.0           | 0.15         | $\Delta L^* = 93.51 - 22.62$                      |
| 6  | 46.25   | 0.0     | 0.0           | 1.55         | Gleichmaessigkeit                                 |
| 7  | 50.98   | 0.0     | 0.0           | 1.45         | $g^* = 90.2$                                      |
| 8  | 55.7    | 0.0     | 0.0           | 1.94         |                                                   |
| 9  | 60.43   | 0.0     | 0.0           | 0.03         | Helligkeitsumfang rel. zu Offset                  |
| 10 | 65.15   | 0.0     | 0.0           | 1.55         | $f^* = 91.6$                                      |
| 11 | 69.88   | 0.0     | 0.0           | 0.87         |                                                   |
| 12 | 74.61   | 0.0     | 0.0           | 0.46         | $\Delta L^*$ -Grauvariation                       |
| 13 | 79.33   | 0.0     | 0.0           | 0.36         | $v^* = 0.0$                                       |
| 14 | 84.06   | 0.0     | 0.0           | 0.36         |                                                   |
| 15 | 88.78   | 0.0     | 0.0           | 0.16         | Mittlerer Helligkeitsabstand (16 Stufen)          |
| 16 | 93.51   | 0.0     | 0.0           | 0.01         | $\Delta E^*_{CIELAB} = 0.7$                       |
| 17 | 22.62   | 0.0     | 0.0           | 0.01         |                                                   |
| 18 | 40.34   | 0.0     | 0.0           | 0.32         |                                                   |
| 19 | 58.07   | 0.0     | 0.0           | 0.96         |                                                   |
| 20 | 75.79   | 0.0     | 0.0           | 0.43         | Mittlerer Helligkeitsabstand (5 Stufen)           |
| 21 | 93.51   | 0.0     | 0.0           | 0.01         | $\Delta L^*_{CIELAB} = 0.3$                       |
|    |         |         |               |              | Mittlerer Farbwiedergabe-Index: $R^*_{ab,m} = 97$ |

Device: (A); Meas.: A10GS2A.PS/.TXT; Date: M010203

[www.ps.bam.de/DG02/10A/A10GS2A.PS/.TXT](http://www.ps.bam.de/DG02/10A/A10GS2A.PS/.TXT)

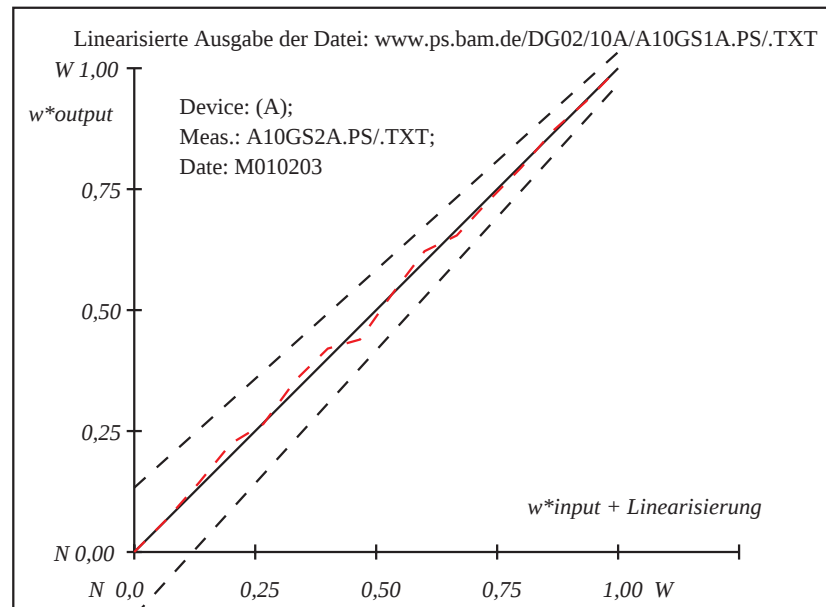

Device: (A); Meas.: A10GS2A.PS/.TXT; Date: M010203

[www.ps.bam.de/DG02/10A/A10GS2A.PS/.TXT](http://www.ps.bam.de/DG02/10A/A10GS2A.PS/.TXT)