


i	LAB*ref			LAB*out			LAB*out/c-ref			ΔE^*	Start-Ausgabe S1
1	23.23	0.0	0.0	23.23	0.0	0.0	0.0	0.0	0.0	0.01	Kennzeichnung nach ISO/IEC 15775 Anhang G und DIN 33866-1 Anhang G
2	27.91	0.0	0.0	26.26	0.0	0.0	-1.64	0.0	0.0	1.65	
3	32.59	0.0	0.0	34.72	0.0	0.0	2.13	0.0	0.0	2.13	
4	37.27	0.0	0.0	41.39	0.0	0.0	4.12	0.0	0.0	4.12	nur L^*-Helligkeit benutzt
5	41.95	0.0	0.0	44.18	0.0	0.0	2.23	0.0	0.0	2.23	$\Delta L^* = 93.43 - 23.23$
6	46.63	0.0	0.0	47.94	0.0	0.0	1.31	0.0	0.0	1.31	Gleichmaessigkeit
7	51.31	0.0	0.0	55.38	0.0	0.0	4.07	0.0	0.0	4.07	$g^* = 77.1$
8	55.99	0.0	0.0	57.63	0.0	0.0	1.64	0.0	0.0	1.64	Helligkeitsumfang rel. zu Offset
9	60.67	0.0	0.0	62.21	0.0	0.0	1.54	0.0	0.0	1.54	
10	65.35	0.0	0.0	68.83	0.0	0.0	3.48	0.0	0.0	3.48	
11	70.03	0.0	0.0	72.58	0.0	0.0	2.55	0.0	0.0	2.55	$f^* = 90.7$
12	74.71	0.0	0.0	76.89	0.0	0.0	2.18	0.0	0.0	2.18	
13	79.39	0.0	0.0	80.58	0.0	0.0	1.19	0.0	0.0	1.19	
14	84.07	0.0	0.0	85.63	0.0	0.0	1.56	0.0	0.0	1.56	$v^* = 0.0$
15	88.75	0.0	0.0	89.78	0.0	0.0	1.03	0.0	0.0	1.03	
16	93.43	0.0	0.0	93.43	0.0	0.0	0.0	0.0	0.0	0.01	
17	23.23	0.0	0.0	23.23	0.0	0.0	0.0	0.0	0.0	0.01	Mittlerer Helligkeitsabstand (16 Stufen)
18	40.78	0.0	0.0	43.48	0.0	0.0	2.7	0.0	0.0	2.7	
19	58.33	0.0	0.0	59.92	0.0	0.0	1.59	0.0	0.0	1.59	
20	75.88	0.0	0.0	77.81	0.0	0.0	1.93	0.0	0.0	1.93	Mittlerer Helligkeitsabstand (5 Stufen)
21	93.43	0.0	0.0	93.43	0.0	0.0	0.0	0.0	0.0	0.01	
Mittlerer Farbwiedergabe-Index:										$R^*_{ab,m} = 92$	

Device: (A); Meas.: A10GS1P.PS/.PDF; Date: M010301

www.ps.bam.de/DG02/10A/A10GS1P.PS/.PDF

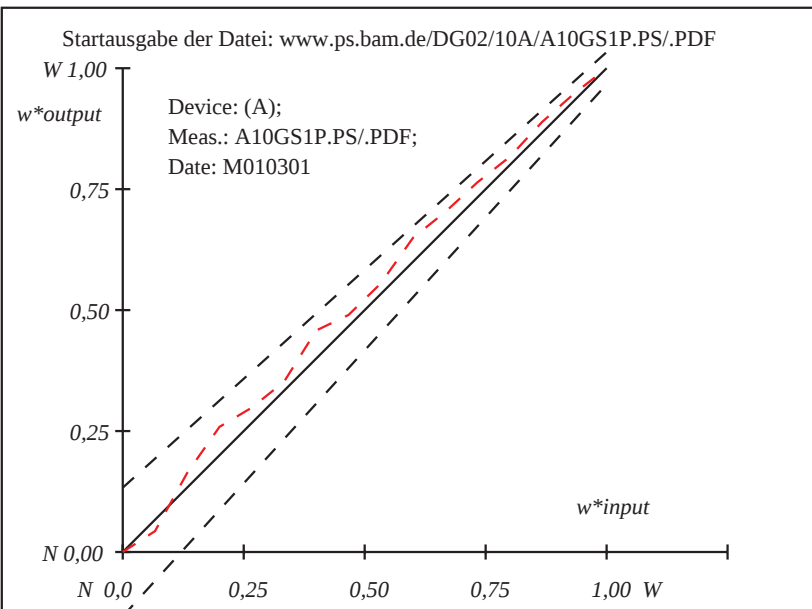


Device: (A); Meas.: A10GS1P.PS/.PDF; Date: M010301

www.ps.bam.de/DG02/10A/A10GS1P.PS/.PDF

i	LAB*ref			LAB*out			LAB*out/c-ref			ΔE^*	Linearisierte Ausgabe S2
1	22.62	0.0	0.0	22.62	0.0	0.0	0.0	0.0	0.0	0.01	Kennzeichnung nach
2	27.35	0.0	0.0	27.38	0.0	0.0	0.03	0.0	0.0	0.04	ISO/IEC 15775 Anhang G
3	32.07	0.0	0.0	32.74	0.0	0.0	0.67	0.0	0.0	0.67	und DIN 33866-1 Anhang G
4	36.8	0.0	0.0	38.52	0.0	0.0	1.72	0.0	0.0	1.72	nur L^*-Helligkeit benutzt
5	41.52	0.0	0.0	41.37	0.0	0.0	-0.14	0.0	0.0	0.15	$\Delta L^* = 93.51 - 22.62$
6	46.25	0.0	0.0	47.8	0.0	0.0	1.55	0.0	0.0	1.55	Gleichmaessigkeit
7	50.98	0.0	0.0	52.43	0.0	0.0	1.45	0.0	0.0	1.45	$g^* = 90.2$
8	55.7	0.0	0.0	53.76	0.0	0.0	-1.93	0.0	0.0	1.94	
9	60.43	0.0	0.0	60.46	0.0	0.0	0.03	0.0	0.0	0.03	Helligkeitsumfang rel. zu Offset
10	65.15	0.0	0.0	66.7	0.0	0.0	1.55	0.0	0.0	1.55	$f^* = 91.6$
11	69.88	0.0	0.0	69.01	0.0	0.0	-0.86	0.0	0.0	0.87	
12	74.61	0.0	0.0	74.15	0.0	0.0	-0.45	0.0	0.0	0.46	ΔL^*-Grauvariation
13	79.33	0.0	0.0	78.97	0.0	0.0	-0.35	0.0	0.0	0.36	$v^* = 0.0$
14	84.06	0.0	0.0	84.42	0.0	0.0	0.36	0.0	0.0	0.36	
15	88.78	0.0	0.0	88.62	0.0	0.0	-0.15	0.0	0.0	0.16	Mittlerer Helligkeitsabstand (16 Stufen)
16	93.51	0.0	0.0	93.51	0.0	0.0	0.0	0.0	0.0	0.01	$\Delta E^*_{CIELAB} = 0.7$
17	22.62	0.0	0.0	22.62	0.0	0.0	0.0	0.0	0.0	0.01	
18	40.34	0.0	0.0	40.66	0.0	0.0	0.32	0.0	0.0	0.32	
19	58.07	0.0	0.0	57.11	0.0	0.0	-0.95	0.0	0.0	0.96	
20	75.79	0.0	0.0	75.36	0.0	0.0	-0.42	0.0	0.0	0.43	Mittlerer Helligkeitsabstand (5 Stufen)
21	93.51	0.0	0.0	93.51	0.0	0.0	0.0	0.0	0.0	0.01	$\Delta L^*_{CIELAB} = 0.3$
Mittlerer Farbwiedergabe-Index:										$R^*_{ab,m} = 97$	

Device: (A); Meas.: A10GS2P.PS/.PDF; Date: M010203

www.ps.bam.de/DG02/10A/A10GS2P.PS/.PDF

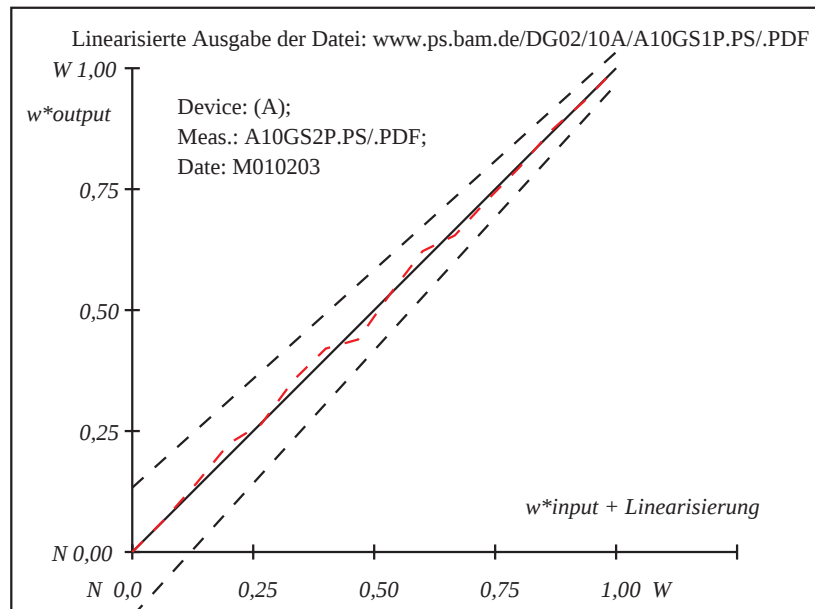

Device: (A); Meas.: A10GS2P.PS/.PDF; Date: M010203

www.ps.bam.de/DG02/10A/A10GS2P.PS/.PDF