

i	LAB*ref		LAB*out		LAB*out/c-ref		ΔE^*		Start-Ausgabe S1
1	21.71	0.0	21.71	0.0	0.0	0.0	0.01	0.01	Kennzeichnung nach
2	26.66	0.0	22.3	0.0	0.0	-4.35	4.36	4.36	ISO/IEC 15775 Anhang G
3	31.62	0.0	24.8	0.0	0.0	-6.81	6.82	6.82	und DIN 33866-1 Anhang G
4	36.57	0.0	28.36	0.0	0.0	-8.2	8.21	8.21	nur L^* -Helligkeit benutzt
5	41.53	0.0	32.02	0.0	0.0	-9.5	9.51	9.51	$\Delta L^* = 96.03 - 21.71$
6	46.48	0.0	40.07	0.0	0.0	-6.4	6.41	6.41	Gleichmaessigkeit
7	51.44	0.0	42.0	0.0	0.0	-9.43	9.44	9.44	$g^* = 33.7$
8	56.39	0.0	47.83	0.0	0.0	-8.55	8.56	8.56	
9	61.35	0.0	54.83	0.0	0.0	-6.51	6.52	6.52	Helligkeitsumfang rel. zu Offset
10	66.3	0.0	62.0	0.0	0.0	-4.29	4.3	4.3	$f^* = 96.0$
11	71.26	0.0	68.98	0.0	0.0	-2.27	2.28	2.28	
12	76.21	0.0	77.97	0.0	0.0	1.76	1.76	1.76	ΔL^* -Grauviation
13	81.17	0.0	82.9	0.0	0.0	1.73	1.73	1.73	$v^* = 0.0$
14	86.12	0.0	89.3	0.0	0.0	3.18	3.18	3.18	
15	91.08	0.0	94.04	0.0	0.0	2.96	2.96	2.96	Mittlerer Helligkeitsabstand (16 Stufen)
16	96.03	0.0	96.03	0.0	0.0	0.0	0.01	0.01	$\Delta E^*_{CIELAB} = 4.8$
17	21.71	0.0	21.71	0.0	0.0	0.0	0.01	0.01	
18	40.29	0.0	31.11	0.0	0.0	-9.18	9.19	9.19	
19	58.87	0.0	51.33	0.0	0.0	-7.53	7.54	7.54	
20	77.45	0.0	79.2	0.0	0.0	1.75	1.75	1.75	Mittlerer Helligkeitsabstand (5 Stufen)
21	96.03	0.0	96.03	0.0	0.0	0.0	0.01	0.01	$\Delta L^*_{CIELAB} = 3.7$
									Mittlerer Farbwiedergabe-Index: $R^*_{ab,m} = 79$


Device: (O); Meas.: O10GS1A.PS/.TXT; Date: M010203

www.ps.bam.de/DG02/100/O10GS1A.PS/.TXT

i	LAB*ref		LAB*out		LAB*out/c-ref		ΔE^*		Linearisierte Ausgabe S2
1	21.41	0.0	21.41	0.0	0.0	0.0	0.01	0.01	Kennzeichnung nach
2	26.38	0.0	26.22	0.0	0.0	-0.15	0.16	0.16	ISO/IEC 15775 Anhang G
3	31.35	0.0	32.77	0.0	0.0	1.42	1.42	1.42	und DIN 33866-1 Anhang G
4	36.32	0.0	35.22	0.0	0.0	-1.09	1.1	1.1	nur L^* -Helligkeit benutzt
5	41.28	0.0	41.4	0.0	0.0	0.12	0.12	0.12	$\Delta L^* = 95.94 - 21.41$
6	46.25	0.0	49.87	0.0	0.0	3.62	3.62	3.62	Gleichmaessigkeit
7	51.22	0.0	51.65	0.0	0.0	0.43	0.43	0.43	$g^* = 94.1$
8	56.19	0.0	56.5	0.0	0.0	0.31	0.31	0.31	
9	61.16	0.0	59.59	0.0	0.0	-1.56	1.57	1.57	Helligkeitsumfang rel. zu Offset
10	66.13	0.0	65.56	0.0	0.0	-0.56	0.57	0.57	$f^* = 96.3$
11	71.1	0.0	70.65	0.0	0.0	-0.44	0.45	0.45	
12	76.07	0.0	76.01	0.0	0.0	-0.05	0.06	0.06	ΔL^* -Grauviation
13	81.03	0.0	81.48	0.0	0.0	0.45	0.45	0.45	$v^* = 0.0$
14	86.0	0.0	86.35	0.0	0.0	0.35	0.35	0.35	
15	90.97	0.0	91.02	0.0	0.0	0.05	0.05	0.05	Mittlerer Helligkeitsabstand (16 Stufen)
16	95.94	0.0	95.94	0.0	0.0	0.0	0.01	0.01	$\Delta E^*_{CIELAB} = 0.7$
17	21.41	0.0	21.41	0.0	0.0	0.0	0.01	0.01	
18	40.04	0.0	39.86	0.0	0.0	-0.18	0.19	0.19	
19	58.68	0.0	58.05	0.0	0.0	-0.62	0.63	0.63	
20	77.31	0.0	77.38	0.0	0.0	0.07	0.07	0.07	Mittlerer Helligkeitsabstand (5 Stufen)
21	95.94	0.0	95.94	0.0	0.0	0.0	0.01	0.01	$\Delta L^*_{CIELAB} = 0.2$
									Mittlerer Farbwiedergabe-Index: $R^*_{ab,m} = 97$


Device: (O); Meas.: O10GS2A.PS/.TXT; Date: M010203

www.ps.bam.de/DG02/100/O10GS2A.PS/.TXT

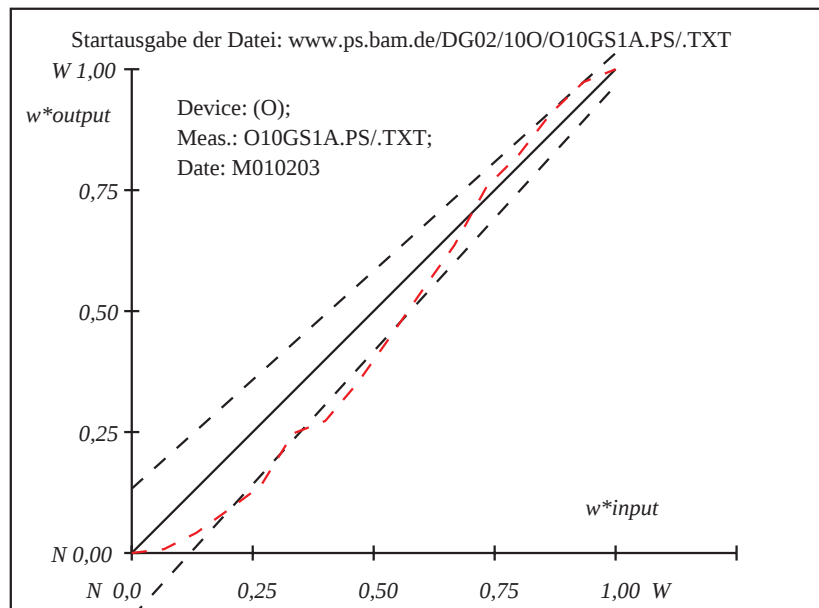

Device: (O); Meas.: O10GS1A.PS/.TXT; Date: M010203

www.ps.bam.de/DG02/100/O10GS1A.PS/.TXT

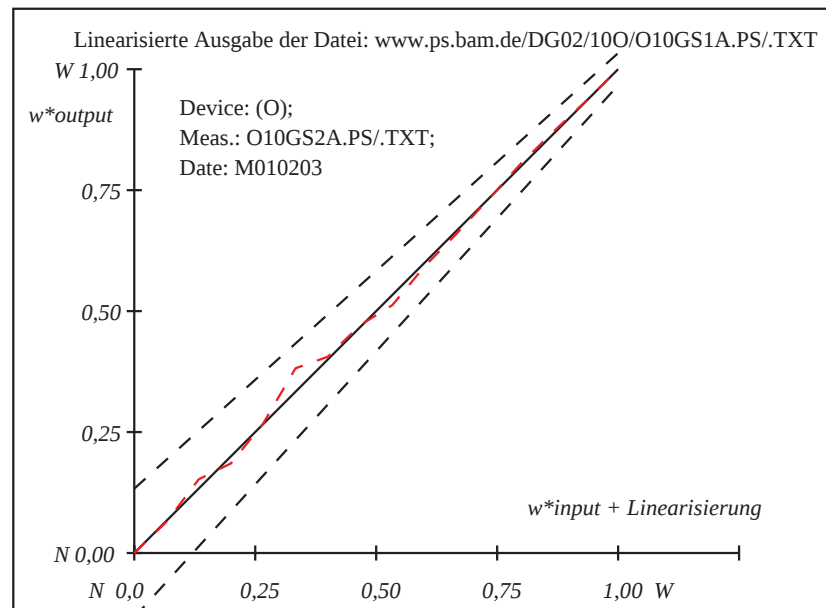

Device: (O); Meas.: O10GS2A.PS/.TXT; Date: M010203

www.ps.bam.de/DG02/100/O10GS2A.PS/.TXT