

i	LAB*ref		LAB*out		LAB*out/c-ref		ΔE^*		Start-Ausgabe S1
1	12.8	0.0	12.8	0.0	0.0	0.0	0.0	0.0	Kennzeichnung nach
2	18.37	0.0	13.24	0.0	0.0	0.0	0.0	5.13	ISO/IEC 15775 Anhang G
3	23.95	0.0	13.63	0.0	0.0	-10.31	0.0	10.32	und DIN 33866-1 Anhang G
4	29.52	0.0	19.19	0.0	0.0	-10.32	0.0	10.33	nur L^* -Helligkeit benutzt
5	35.09	0.0	26.83	0.0	0.0	-8.25	0.0	8.26	$\Delta L^* = 96.39 - 12.8$
6	40.66	0.0	34.12	0.0	0.0	-6.53	0.0	6.54	Gleichmaessigkeit
7	46.24	0.0	40.27	0.0	0.0	-5.96	0.0	5.97	$g^* = 49.3$
8	51.81	0.0	44.95	0.0	0.0	-6.85	0.0	6.86	
9	57.38	0.0	50.75	0.0	0.0	-6.62	0.0	6.63	Helligkeitsumfang rel. zu Offset
10	62.95	0.0	55.23	0.0	0.0	-7.71	0.0	7.72	$f^* = 108.0$
11	68.53	0.0	60.02	0.0	0.0	-8.5	0.0	8.51	
12	74.1	0.0	70.35	0.0	0.0	-3.74	0.0	3.75	ΔL^* -Grauviation
13	79.67	0.0	76.19	0.0	0.0	-3.47	0.0	3.48	$v^* = 0.0$
14	85.24	0.0	83.6	0.0	0.0	-1.63	0.0	1.64	
15	90.82	0.0	88.87	0.0	0.0	-1.94	0.0	1.95	Mittlerer Helligkeitsabstand (16 Stufen)
16	96.39	0.0	96.39	0.0	0.0	0.0	0.0	0.01	$\Delta E^*_{CIELAB} = 5.4$
17	12.8	0.0	12.8	0.0	0.0	0.0	0.0	0.01	
18	33.7	0.0	24.92	0.0	0.0	-8.77	0.0	8.78	
19	54.59	0.0	47.85	0.0	0.0	-6.73	0.0	6.75	
20	75.49	0.0	71.81	0.0	0.0	-3.67	0.0	3.68	Mittlerer Helligkeitsabstand (5 Stufen)
21	96.39	0.0	96.39	0.0	0.0	0.0	0.0	0.01	$\Delta L^*_{CIELAB} = 3.8$
									Mittlerer Farbwiedergabe-Index: $R^*_{ab,m} = 77$


Device: (T); Meas.: X10GS1P.PS/.PDF; Date: M010203

www.ps.bam.de/DG02/10X/X10GS1P.PS/.PDF

i	LAB*ref		LAB*out		LAB*out/c-ref		ΔE^*		Optimierte Ausgabe S2
1	15.09	0.0	15.09	0.0	0.0	0.0	0.0	0.01	Kennzeichnung nach
2	20.49	0.0	19.38	0.0	0.0	-1.1	0.0	1.11	ISO/IEC 15775 Anhang G
3	25.89	0.0	24.96	0.0	0.0	-0.92	0.0	0.93	und DIN 33866-1 Anhang G
4	31.29	0.0	32.31	0.0	0.0	1.02	0.0	1.02	nur L^* -Helligkeit benutzt
5	36.68	0.0	36.41	0.0	0.0	-0.26	0.0	0.27	$\Delta L^* = 96.07 - 15.09$
6	42.08	0.0	41.21	0.0	0.0	-0.86	0.0	0.87	Gleichmaessigkeit
7	47.48	0.0	47.38	0.0	0.0	-0.09	0.0	0.1	$g^* = 89.9$
8	52.88	0.0	53.37	0.0	0.0	0.49	0.0	0.49	
9	58.28	0.0	59.19	0.0	0.0	0.91	0.0	0.91	Helligkeitsumfang rel. zu Offset
10	63.68	0.0	61.58	0.0	0.0	-2.09	0.0	2.1	$f^* = 104.6$
11	69.08	0.0	66.43	0.0	0.0	-2.64	0.0	2.65	
12	74.48	0.0	73.62	0.0	0.0	-0.85	0.0	0.86	ΔL^* -Grauviation
13	79.87	0.0	79.59	0.0	0.0	-0.27	0.0	0.28	$v^* = 0.0$
14	85.27	0.0	86.49	0.0	0.0	1.22	0.0	1.22	
15	90.67	0.0	90.4	0.0	0.0	-0.26	0.0	0.27	Mittlerer Helligkeitsabstand (16 Stufen)
16	96.07	0.0	96.07	0.0	0.0	0.0	0.0	0.01	$\Delta E^*_{CIELAB} = 0.8$
17	15.09	0.0	15.09	0.0	0.0	0.0	0.0	0.01	
18	35.34	0.0	35.39	0.0	0.0	0.05	0.0	0.05	
19	55.58	0.0	56.28	0.0	0.0	0.7	0.0	0.7	
20	75.82	0.0	75.11	0.0	0.0	-0.7	0.0	0.71	Mittlerer Helligkeitsabstand (5 Stufen)
21	96.07	0.0	96.07	0.0	0.0	0.0	0.0	0.01	$\Delta L^*_{CIELAB} = 0.3$
									Mittlerer Farbwiedergabe-Index: $R^*_{ab,m} = 97$


Device: (T); Meas.: X10GS2P.PS/.PDF; Date: M010203

www.ps.bam.de/DG02/10X/X10GS2P.PS/.PDF

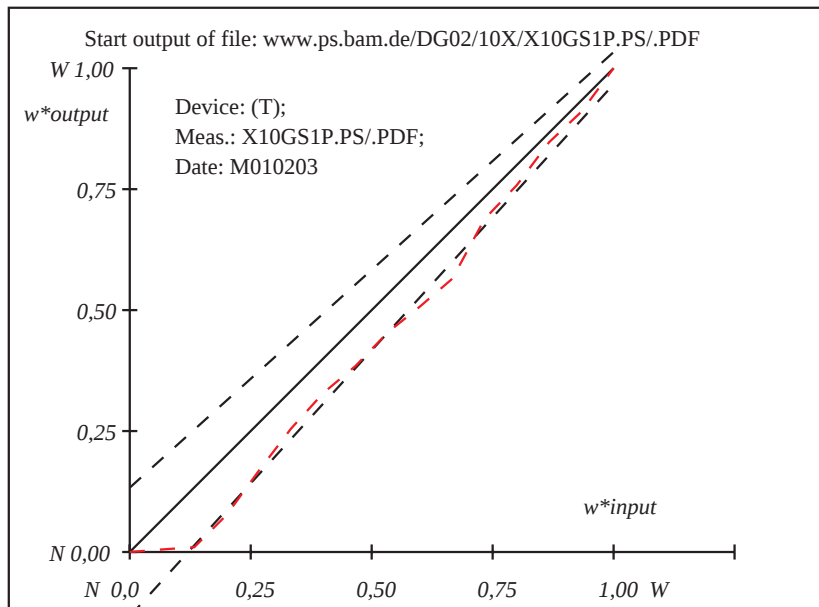

Device: (T); Meas.: X10GS1P.PS/.PDF; Date: M010203

www.ps.bam.de/DG02/10X/X10GS1P.PS/.PDF

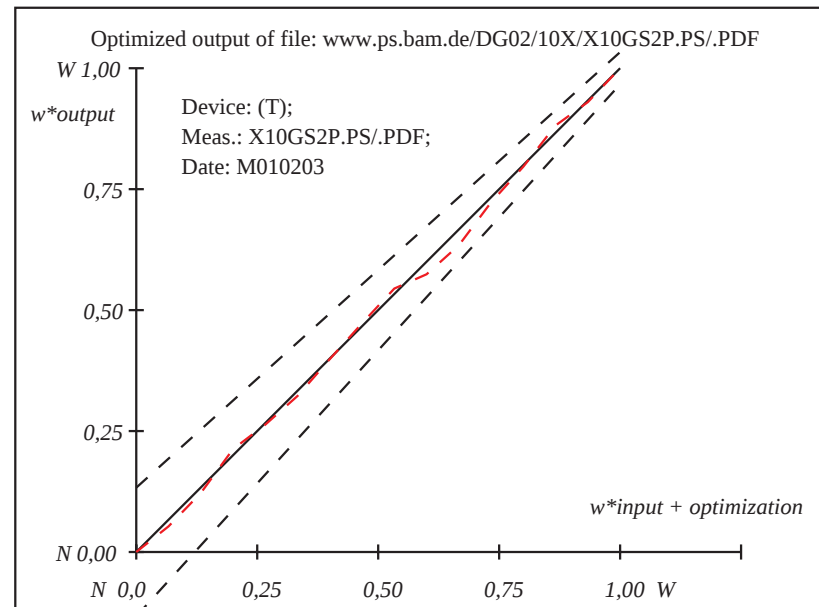

Device: (T); Meas.: X10GS2P.PS/.PDF; Date: M010203

www.ps.bam.de/DG02/10X/X10GS2P.PS/.PDF