




Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS operator: 000n\* setcmykcolor




Picture C2: 5 visual equidistant L\*-grey steps + N0 + W1; PS operator: 000n\* setcmykcolor

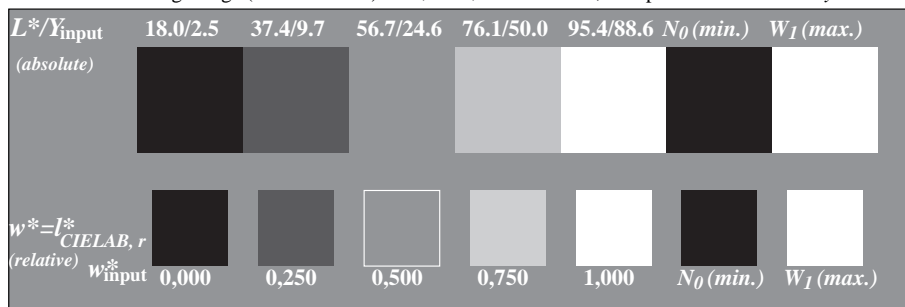


Picture C3: 16 visual equidistant L\*-grey steps; PS operator: 000n\* setcmykcolor; use file [www.bam.de/FE86/10L/L86E0iNA.PS](http://www.bam.de/FE86/10L/L86E0iNA.PS) or [L86E0iNP.PS](http://www.bam.de/L86E0iNP.PS) (i=0,7) for PDF systems to complete the figure


ISO/IEC-test chart no. 3 according to ISO/IEC 15775 and input: 000n\*lin 1.0 exp setcmykcolor  
DIS ISO/IEC 19839-X; output: 000n\*lin 1.0 exp setcmykcolor

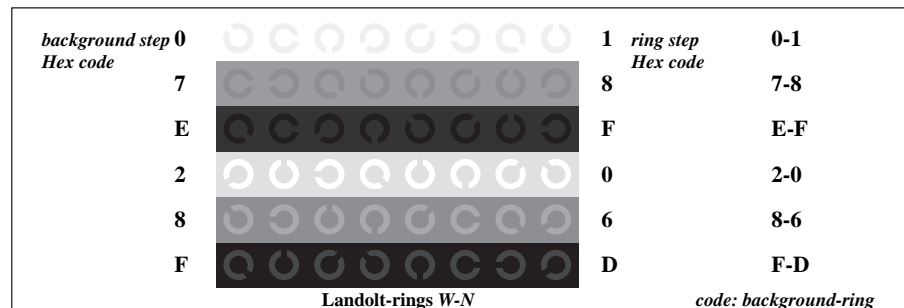

Picture C4: Landolt-rings W-N; PS operator: 000n\* setcmykcolor

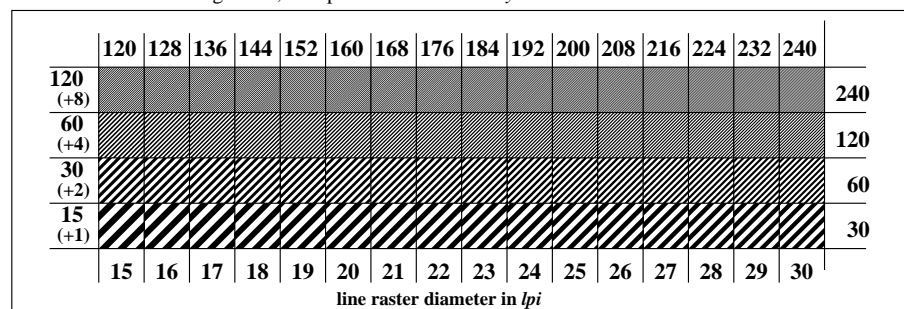

Picture C5: Line raster under 45° (or 135°); PS operator: 000n\* setcmykcolor

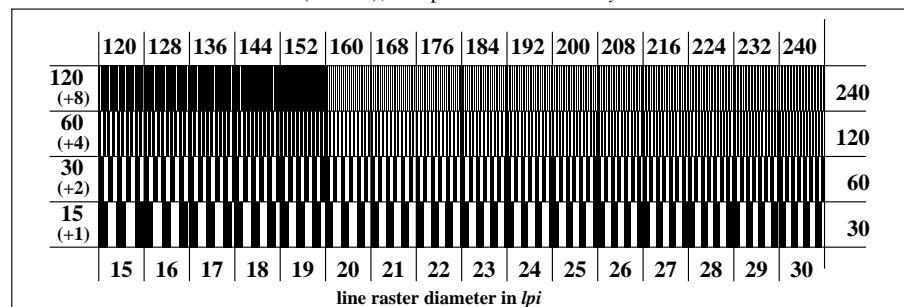

Picture C6: Line raster under 90° (or 0°); Use of the PS operator 000n\* setcmykcolor