




Radial grating (Siemens-star) N-W

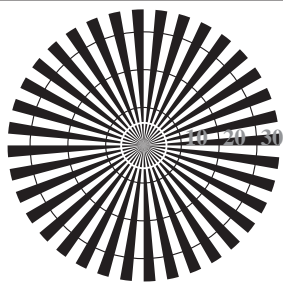

Radial grating (Siemens-star) W-N

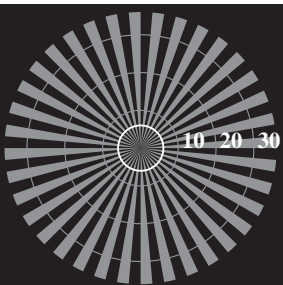


Radial grating (Siemens-star) N-Z

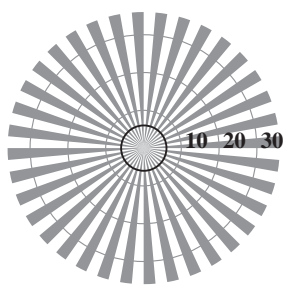

Radial grating (Siemens-star) W-Z

Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS operator: *w\*lin 1.0 exp setgray*

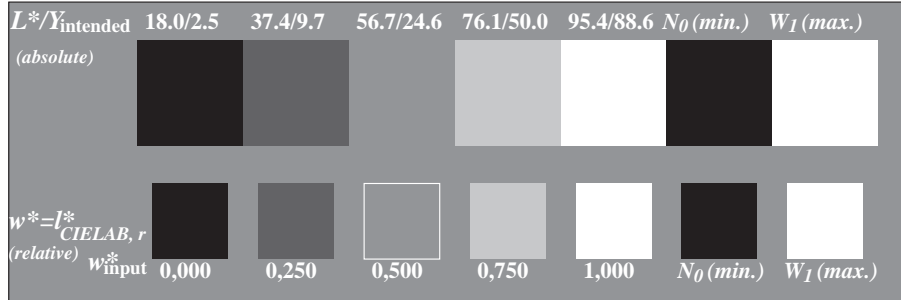


Picture C2: 5 visual equidistant  $L^*$ -grey steps +  $N_0$  +  $W_I$ ; PS operator: *w\*lin 1.0 exp setgray*




Picture C3: 16 visual equidistant  $L^*$ -grey steps; PS operator: *w\*lin 1.0 exp setgray*; use file [www.bam.de/FE87/10L/L87E00FA.PS](http://www.bam.de/FE87/10L/L87E00FA.PS) or [/L87E00FP.PS](http://www.bam.de/L87E00FP.PS) for DPS or PDF systems to complete the figure

ISO/IEC-test chart no. 3 according to

ISO/IEC 15775 and input: *w\*lin 1.0 exp setgray*  
DIS ISO/IEC 19839-X; output: *cmy0\* / 000n\* setcmykcolor*

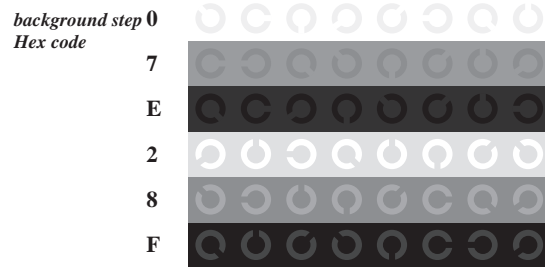


Landolt-rings W-N

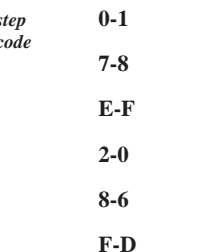


code: background-ring

Picture C4: Landolt-rings W-N; PS operator: *w\*lin 1.0 exp setgray*

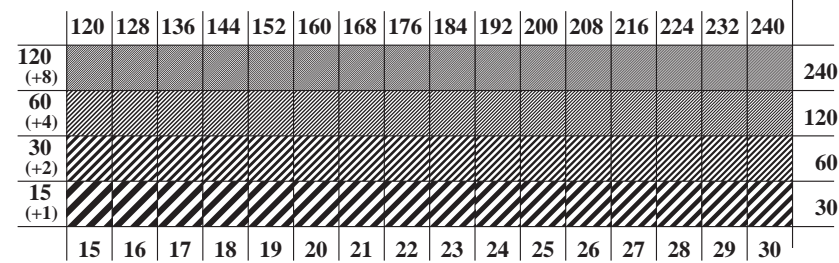

line raster diameter in *lpi*

Picture C5: Line raster under 45° (or 135°); PS operator: *w\*lin 1.0 exp setgray*

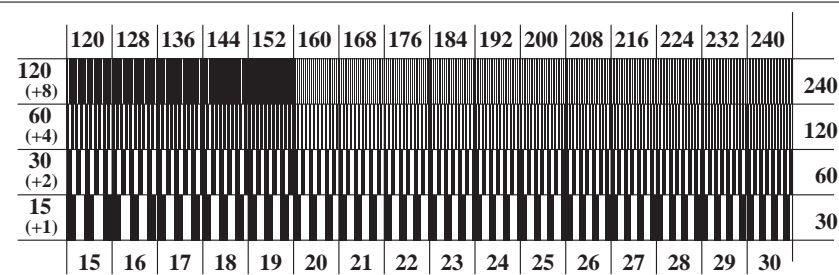

line raster diameter in *lpi*

Picture C6: Line raster under 90° (or 0°); PS operator: *w\*lin 1.0 exp setgray*