




Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS operator: $w^*lin\ 1.0\ exp\ setgray$



Picture C2: 5 visual equidistant L^* -gray steps + N_0 + W_1 ; PS operator: $w^*lin\ 1.0\ exp\ setgray$

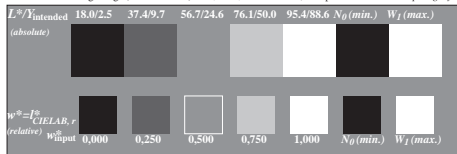


Picture C3: 16 visual equidistant L^* -gray steps; PS operator: $w^*lin\ 1.0\ exp\ setgray$; use file www.bam.de/FE87/10T/T87E00FA.PS or /T87E00FP.PS/PDF for DPS or PDF systems to complete the figure


ISO/IEC-test chart no. 3 according to

ISO/IEC 15775 and
DIS ISO/IEC 19839-X;


input: $w^*lin\ 1.0\ exp\ setgray$
output: $cmY0^*/000n^*\ setcmykcolor$

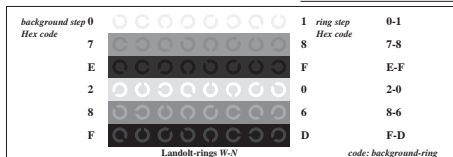

Picture C4: Landolt-rings W-N; PS operator: $w^*lin\ 1.0\ exp\ setgray$

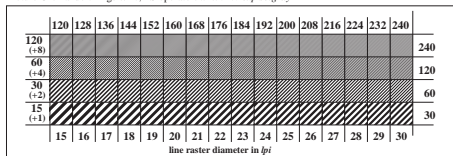

Picture C5: Line raster under 45° (or 135°); PS operator: $w^*lin\ 1.0\ exp\ setgray$

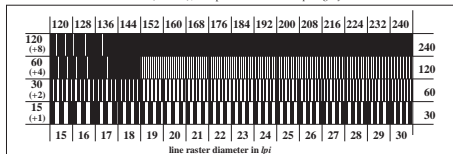

Picture C6: Line raster under 90° (or 0°); PS operator: $w^*lin\ 1.0\ exp\ setgray$