





Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS operator: *nnn0\* setcmkcolor*

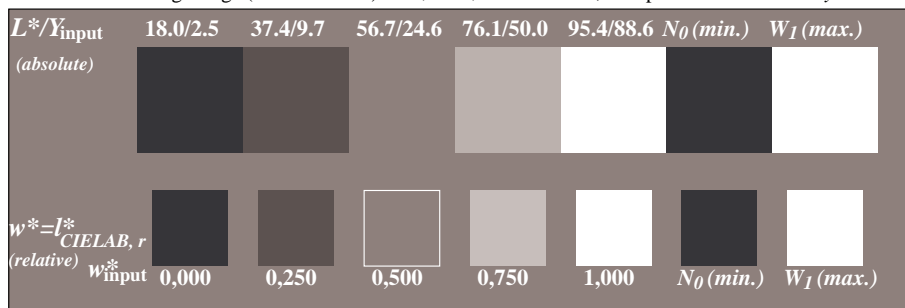

Picture C2: 5 visual equidistant  $L^*$ -grey steps +  $N_0$  +  $W_1$ ; PS operator: *cmv0\* setcmkcolor*




Picture C3: 16 visual equidistant  $L^*$ -grey steps; PS operator: *nnn0\* setcmkcolor*; use file [www.bam.de/KE88/10F/F88E00NA.PS](http://www.bam.de/KE88/10F/F88E00NA.PS) or [/F88E00NP.PS/.PDF](http://www.bam.de/EE88/10F/F88E00NP.PS) for DPS or PDF systems to complete the figure


ISO/IEC-test chart no. 3 according to ISO/IEC 15775 and input: *nnn0\*lin 1.0 exp setcmkcolor*  
DIS ISO/IEC 19839-X; output: *nnn0\*lin 1.0 exp setcmkcolor*



Picture C4: Landolt-rings W-N; PS operator: *nnn0\* setcmkcolor*

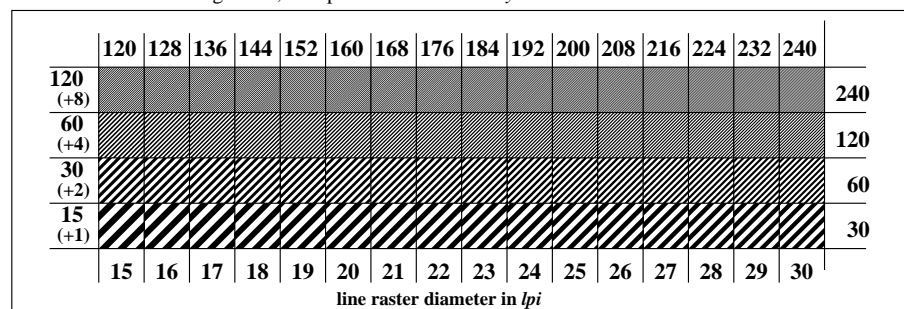

Picture C5: Line raster under 45° (or 135°); PS operator: *nnn0\* setcmkcolor*

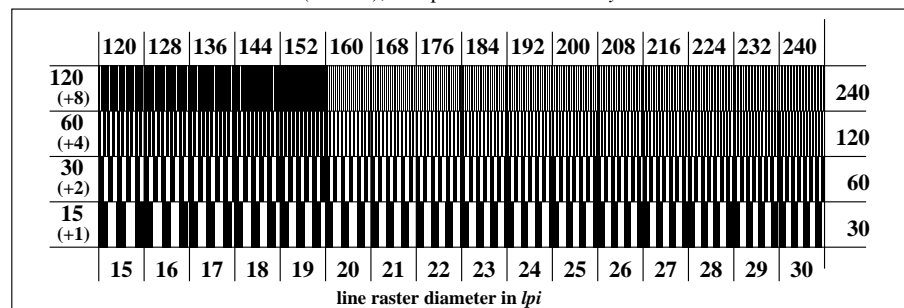

Picture C6: Line raster under 90° (or 0°); Use of the PS operator *nnn0\* setcmkcolor*