




Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS operator: *nnn0\* setcmykcolor*




Picture C2: 5 visual equidistant  $L^*$ -grey steps +  $N_0$  +  $W_1$ ; PS operator: *cmY0\* setcmykcolor*

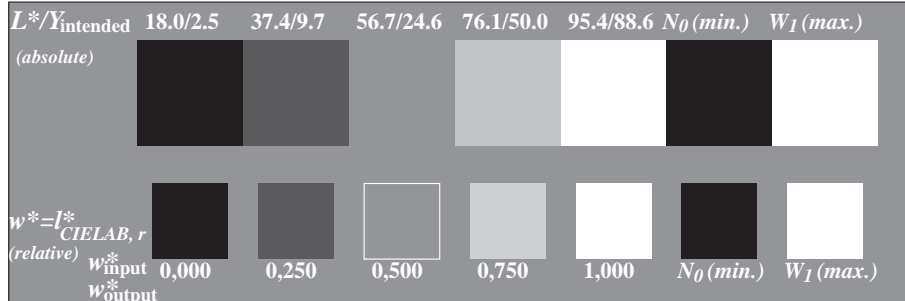


Picture C3: 16 visual equidistant  $L^*$ -grey steps; PS operator: *nnn0\* setcmykcolor*; use file [www.bam.de/KE88/10L/L88E00FA.PS](http://www.bam.de/KE88/10L/L88E00FA.PS) or [/L88E00FP.PS](http://www.bam.de/KE88/10L/L88E00FP.PS) for DPS or PDF systems to complete the figure

ISO/IEC-test chart no. 3 according to


ISO/IEC 15775 and input: *nnn0\*lin 1.0 exp setcmykcolor*  
DIS ISO/IEC 19839-X; output: *cmY0\* / 000n\* setcmykcolor*

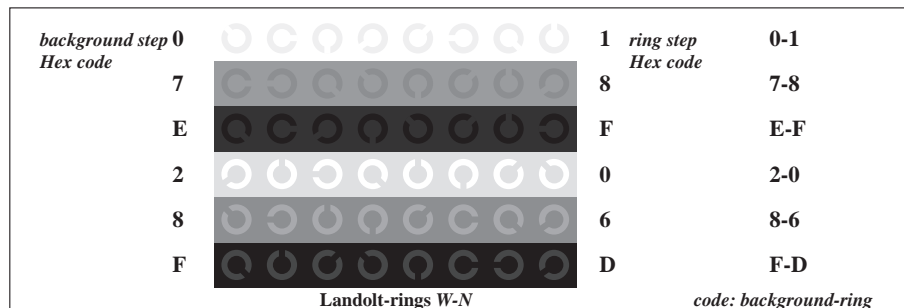

Picture C4: Landolt-rings W-N; PS operator: *nnn0\* setcmykcolor*

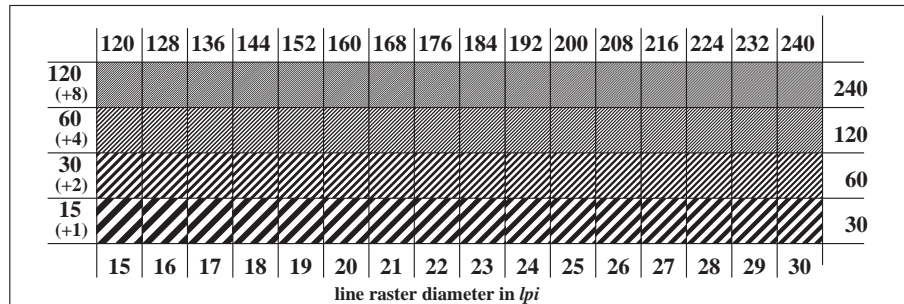

Picture C5: Line raster under 45° (or 135°); PS operator: *nnn0\* setcmykcolor*

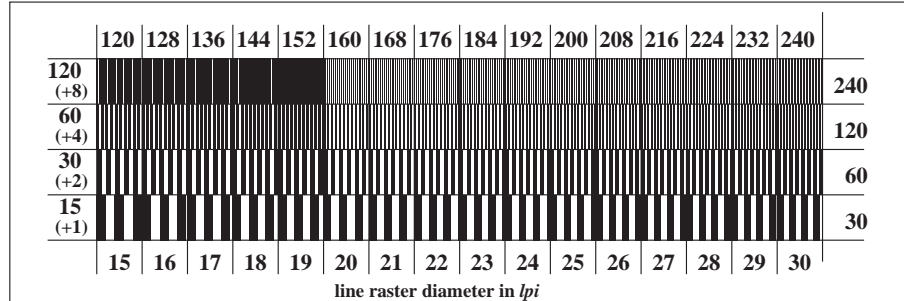

Picture C6: Line raster under 90° (or 0°); Use of the PS operator *nnn0\* setcmykcolor*