


Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS operator:  $nnn0^* setcmykcolor$



Picture C2: 5 visual equidistant  $L^*$ -grey steps +  $N_0$  +  $W_I$ ; PS operator:  $cmv0^* setcmykcolor$

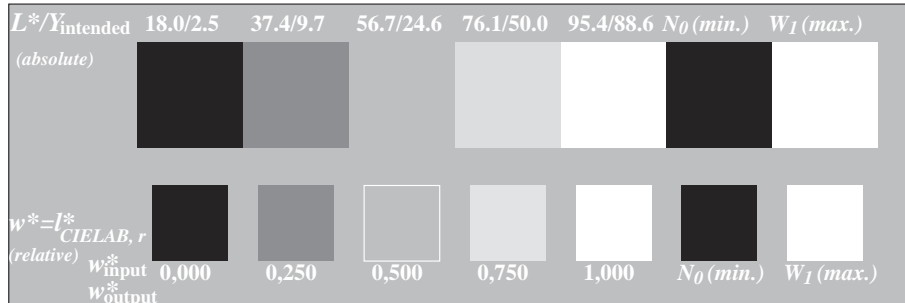

Picture C3: 16 visual equidistant  $L^*$ -grey steps; PS operator:  $nnn0^* setcmykcolor$ ; use file [www.bam.de/KE88/10Q/Q88E00FA.PS](http://www.bam.de/KE88/10Q/Q88E00FA.PS) or [/Q88E00FP.PS](http://www.bam.de/Q88E00FP.PS) for DPS or PDF systems to complete the figure

ISO/IEC-test chart no. 3 according to


ISO/IEC 15775 and input:  $nnn0^* lin 1.0 exp setcmykcolor$   
DIS ISO/IEC 19839-X; output:  $cmv0^* / 000n^* setcmykcolor$

background step 0		1 ring step	0-1
Hex code		Hex code	
7		8	7-8
E		F	E-F
2		0	2-0
8		6	8-6
F		D	F-D

Landolt-rings W-N


code: background-ring

Picture C4: Landolt-rings W-N; PS operator:  $nnn0^* setcmykcolor$

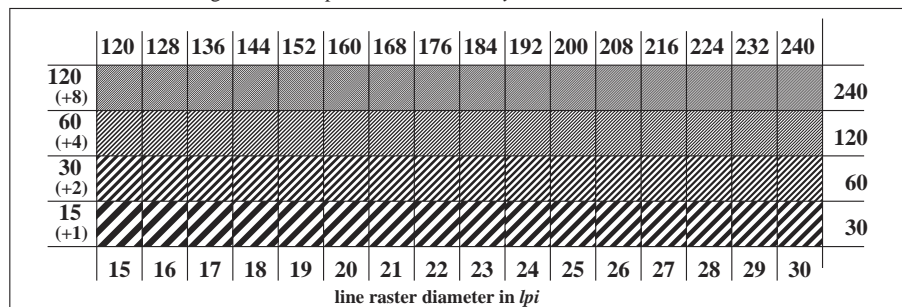

line raster diameter in lpi

Picture C5: Line raster under 45° (or 135°); PS operator:  $nnn0^* setcmykcolor$

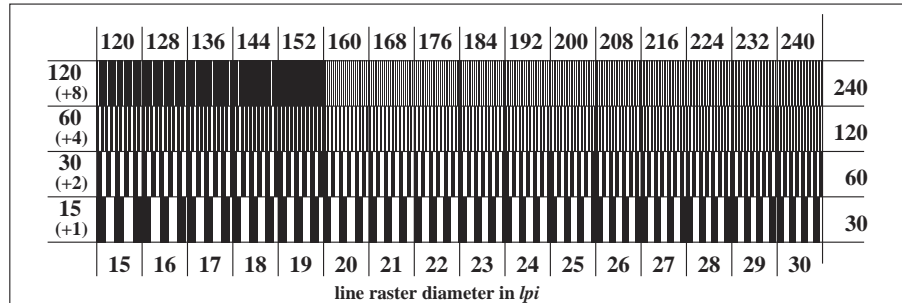

line raster diameter in lpi

Picture C6: Line raster under 90° (or 0°); Use of the PS operator  $nnn0^* setcmykcolor$