



Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS operator: *nnn0* setcmkcolor*

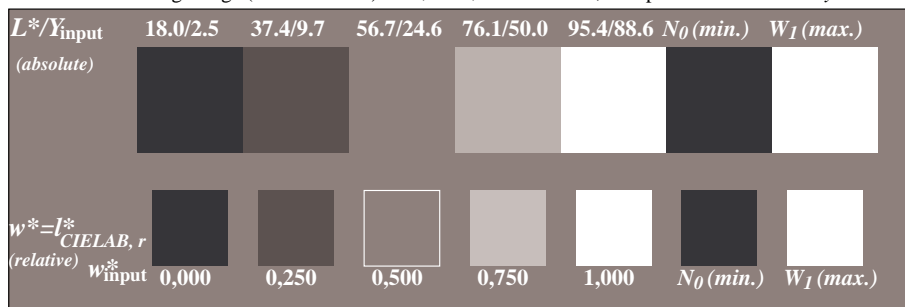


Picture C2: 5 visual equidistant L^* -grey steps + N_0 + W_1 ; PS operator: *cmv0* setcmkcolor*




Picture C3: 16 visual equidistant L^* -grey steps; PS operator: *nnn0* setcmkcolor*; use file www.bam.de/KE88/10S/S88E00NA.PS or [/S88E00NP.PS/.PDF](http://www.bam.de/S88E00NP.PS) for DPS or PDF systems to complete the figure


ISO/IEC-test chart no. 3 according to ISO/IEC 15775 and input: *nnn0*lin 1.0 exp setcmkcolor*
DIS ISO/IEC 19839-X; output: *nnn0*lin 1.0 exp setcmkcolor*

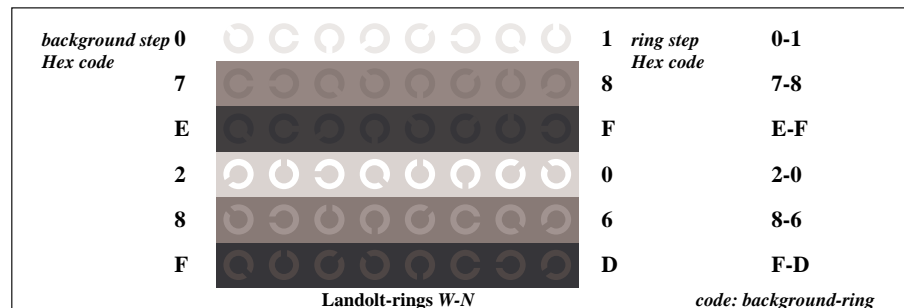

Picture C4: Landolt-rings W-N; PS operator: *nnn0* setcmkcolor*

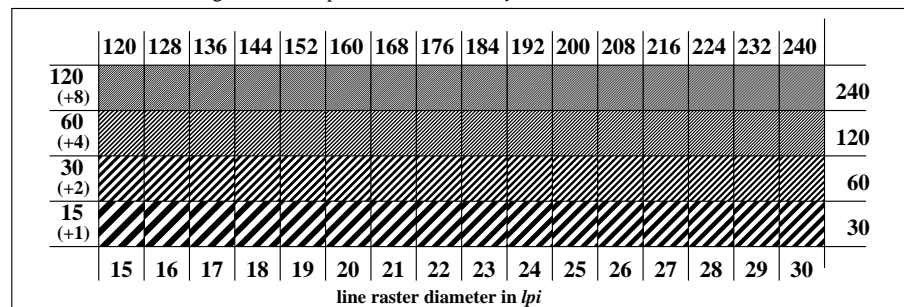

Picture C5: Line raster under 45° (or 135°); PS operator: *nnn0* setcmkcolor*

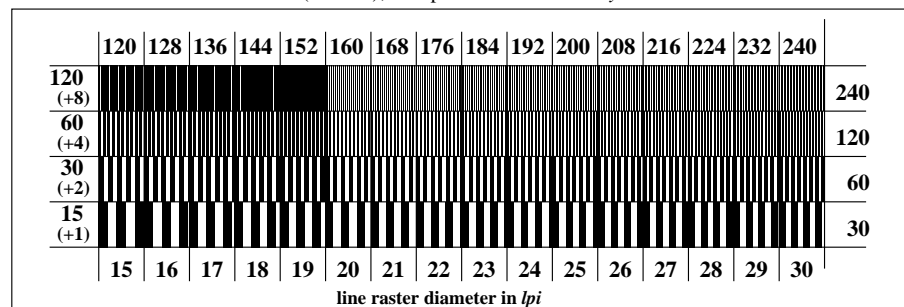

Picture C6: Line raster under 90° (or 0°); Use of the PS operator *nnn0* setcmkcolor*