



Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS operator: *nnn0* setcmykcolor*

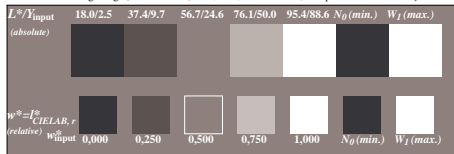


Picture C2: 5 visual equidistant L^* -grey steps + N_0 + W_1 ; PS operator: *cmy0* setcmykcolor*




Picture C3: 16 visual equidistant L^* -grey steps; PS operator: *nnn0* setcmykcolor*; use file www.bam.de/EE88/10T/T88E00NA.PS or [/T88E00NP.PS](http://www.bam.de/EE88/10T/T88E00NP.PS) for DPS or PDF systems to complete the figure


ISO/IEC-test chart no. 3 according to ISO/IEC 15775 and DIS ISO/IEC 19839-X; input: *nnn0*lin 1.0 exp setcmykcolor* output: *nnn0*lin 1.0 exp setcmykcolor*

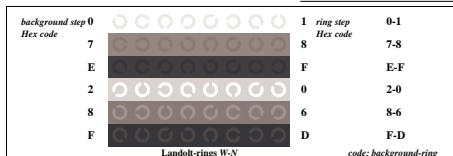

Picture C4: Landolt-rings W-N; PS operator: *nnn0* setcmykcolor*

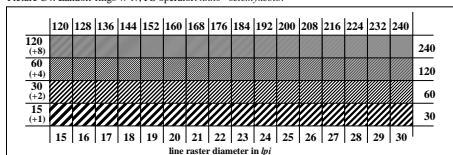

Picture C5: Line raster under 45° (or 135°); PS operator: *nnn0* setcmykcolor*

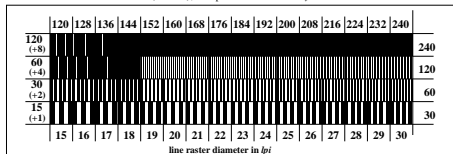

Picture C6: Line raster under 90° (or 0°); Use of the PS operator *nnn0* setcmykcolor*