


See for similar files: <http://www.ps.bam.de/EE95/EE95.HTM>
Information and Order: <http://www.ps.bam.de> Version 2.0, io=1,1

BAM registration: 20030101-EE95/10S/S95E02NP.PS/.PDF BAM material: code=rha4ta
application for measurement of monitor (Yr=2.5) and printer output

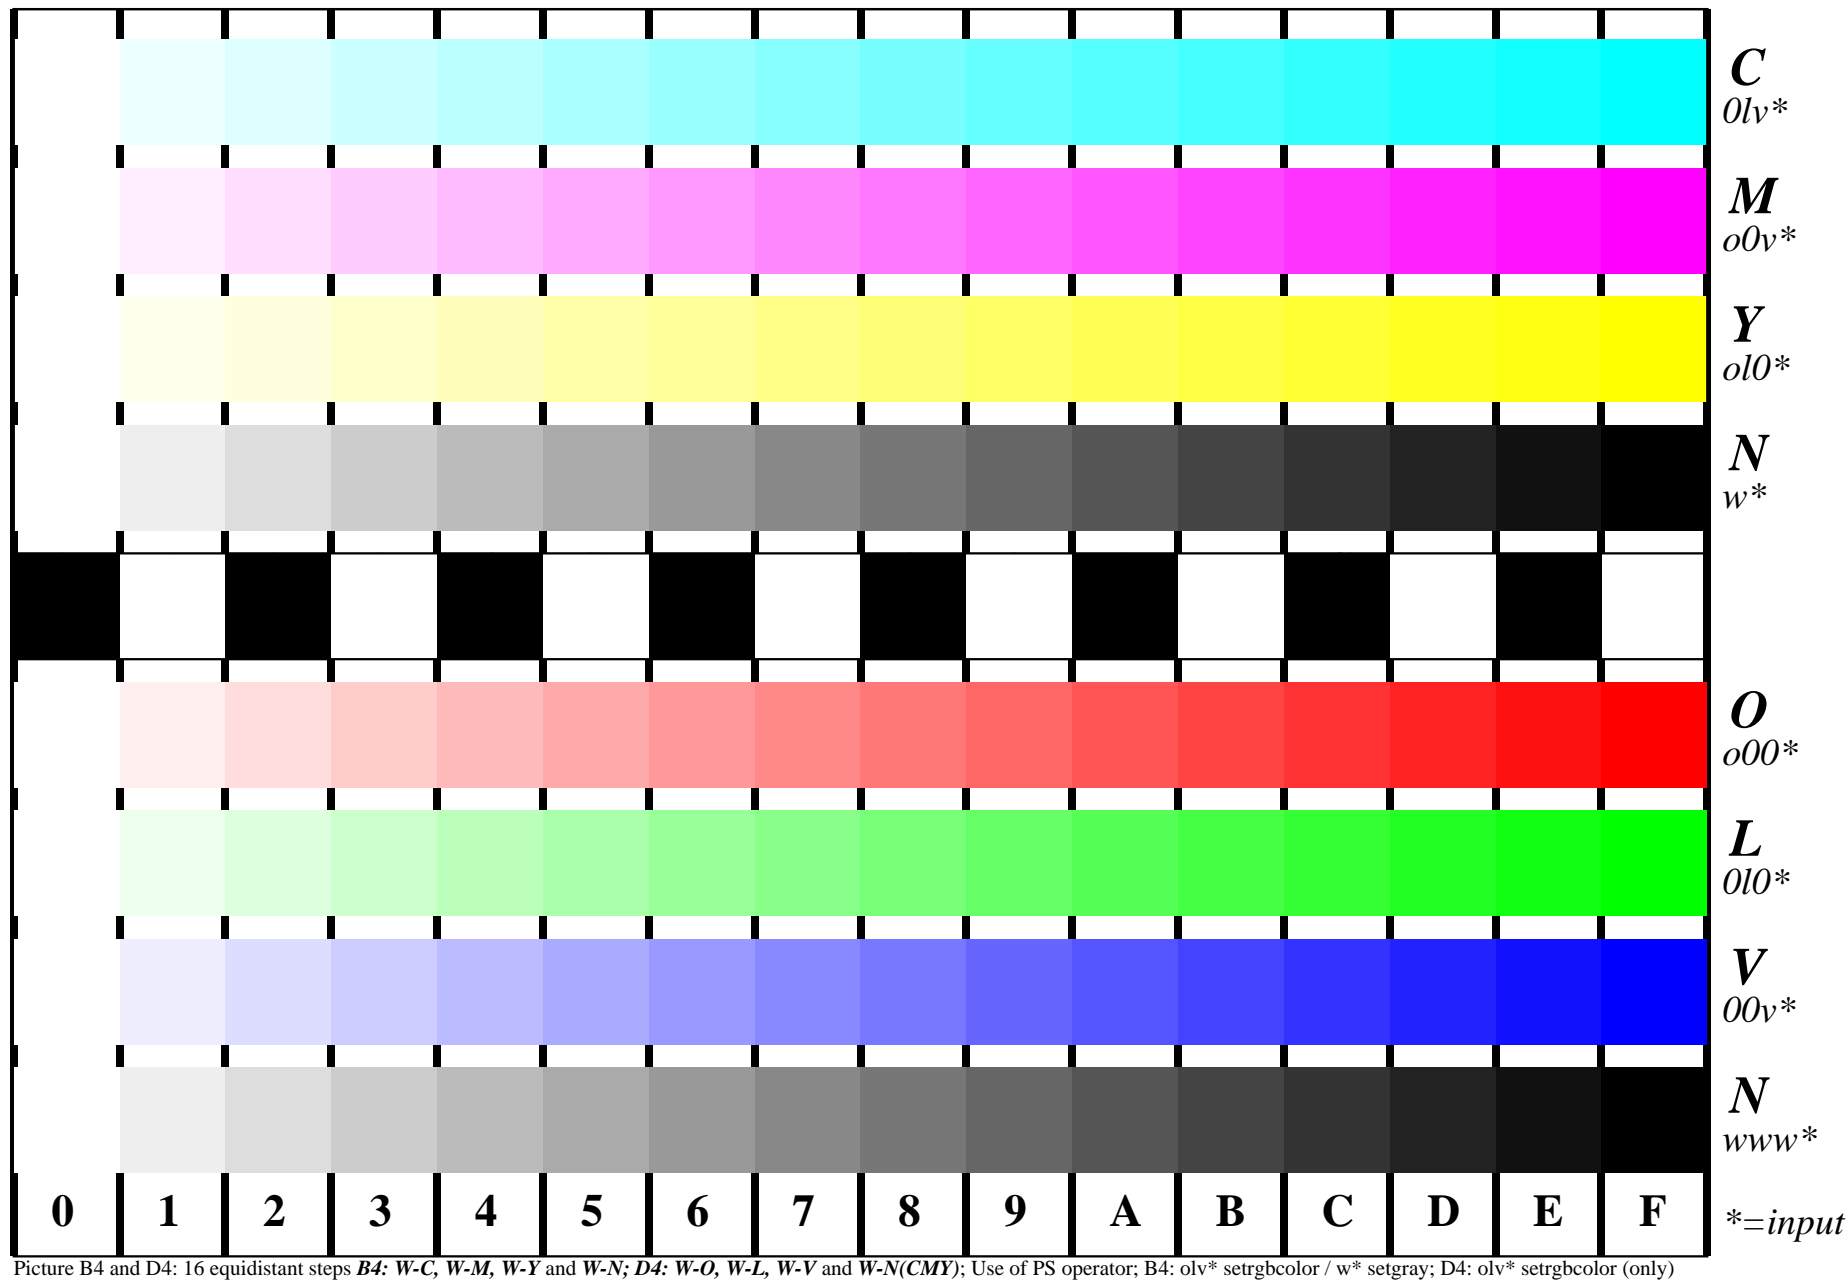

Picture B4 and D4: 16 equidistant steps $B4$: $W-C$, $W-M$, $W-Y$ and $W-N$; $D4$: $W-O$, $W-L$, $W-V$ and $W-N(CMY)$; Use of PS operator; $B4$: $olv^* \text{ setrgbcolor} / w^* \text{ setgray}$; $D4$: $olv^* \text{ setrgbcolor}$ (only)

Fig. B4 of ISO/IEC-test chart 2 and
Fig. D4 of ISO/IEC-test chart no. 4;

ISO/IEC 15775 and
TR ISO/IEC 24705;

input: $olv^* \text{ setrgbcolor} / w^* \text{ setgray}$
output: no change compared to input