

image pixel: 192 x 128

384 x 256


768 x 512

1536 x 1024

3072 x 2048




Picture D1: Flower motif, 14 CIE-test colours and 2 + 16 grey steps (nf); PS operators *settransfer*, 4 *colorimage*

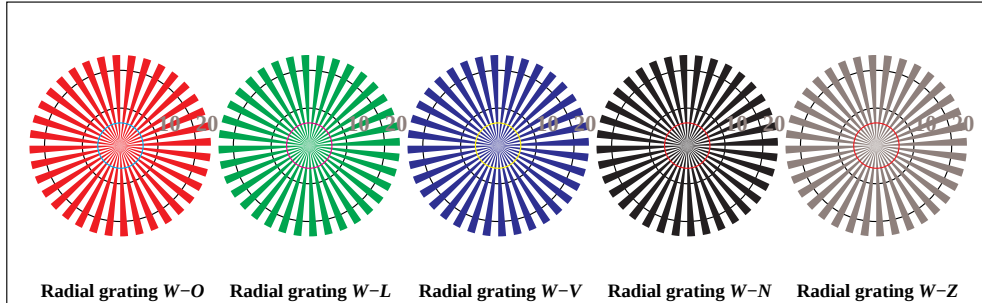


Picture D2: Radial gratings *W-O*, *W-L*, *W-V*, *W-N*, and *W-Z*; PS operator *cmv0* setcmykcolor (only)*




Picture D3: 14 CIE-test colours and 2 + 16 grey steps; Use of PS operator *cmy0* setcmykcolor* (only)

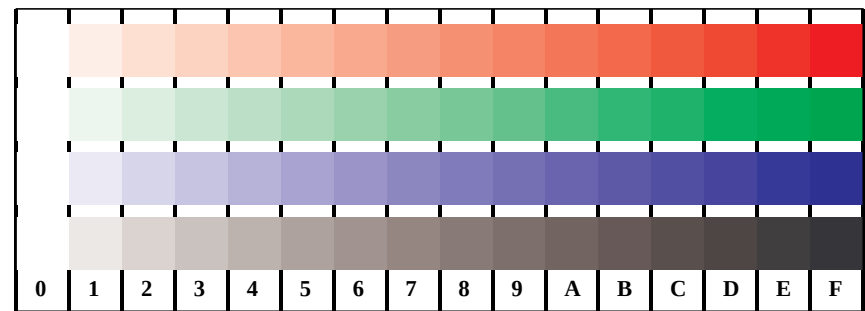


Picture D4: 16 equidistant steps *W-O*, *W-L*, *W-V* and *W-N*; Use of PS operator *cmy0* setcmykcolor* (only)

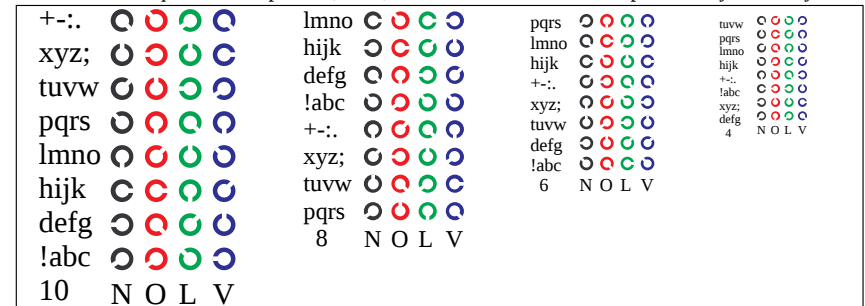

Picture D5: Script and Landolt-rings *N*, *O*, *L* and *V*; Use of PS operator *cmy0*setcmykcolor* (only)

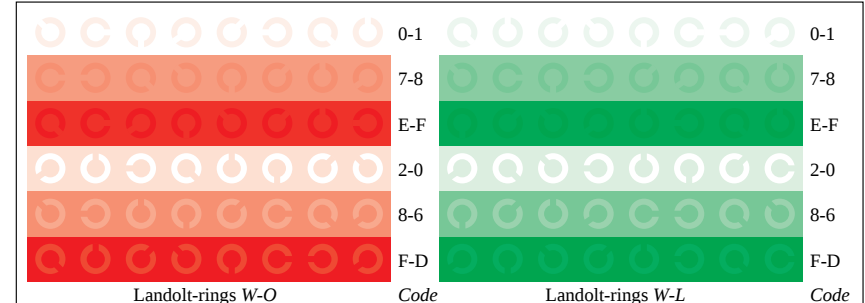

Picture D6: Landolt-rings **W-O** and **W-L**; Use of PS operator `cmv0* setcmykcolor` (only)

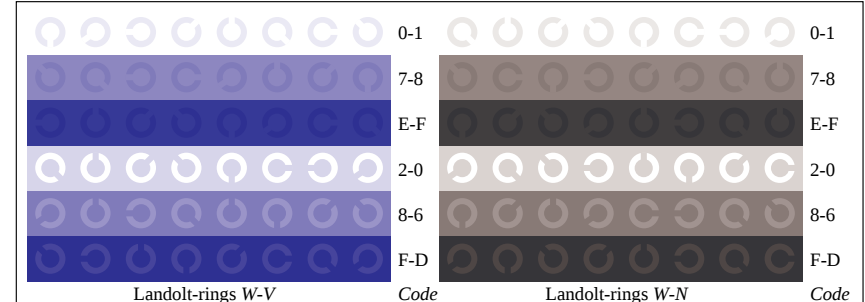

Landolt-rings W-V	Code	Landolt-rings W-N
Picture D7: Landolt-rings W-V and W-N; Use of PS operator <code>cmY0* setcmykcolor</code> (only)		

Fig. D1 to D7 of ISO/IEC-test chart 4;

ISO/IEC 15775 and input: *cmy0* setcmykcolor (only)*
DIS ISO/IEC 19839-X; output: *Startup (S) data dependend*

BAM registration: 20030101-EE98/10L/L98E01SP.PS.PDF

application for monitors (Yr=2.5) and printers

BAM material: code=rh4ta