

www.ps.bam.de/FE86/T86E00F1.PS/.TXT; linearized output


F: Output Linearization (OL) data FE86/T86E00F1.DAT in File (F)

See for similar files: <http://www.ps.bam.de/FE86/>
Information and Order: <http://www.ps.bam.de>

Version 2.0, io=0.0; iORS; oORS; CIE LAB

BAM registration: 20031201-FE86/T86E00F1.PS/.TXT
Bottom part of page: application for monitors (YI=2.5) and printers

BAM material: code=th4ta

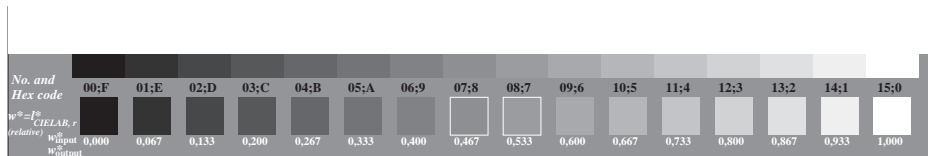

Picture C3: 16 visual equidistant L^* -grey steps; PS operator: 000n* setcmykcolor; use file www.bam.de/IE86/10T/T86E00FA.PS or [/T86E00FP.PS](http://www.bam.de/T86E00FP.PS) for DPS or PDF systems to complete the figure

ISO/IEC-test chart no. 3 according to

ISO/IEC 15775 and
DIS ISO/IEC 19839-X;

input: 000n*lin 1.0 exp setcmykcolor
output: cmy0* / 000n* setcmykcolor