

www.ps.bam.de/FE87/Q87E00F1.PS/.TXT; linearized output


F: Output Linearization (OL) data FE87/Q87E00F1.DAT in File (F)

See for similar files: <http://www.ps.bam.de/FE87/>
Information and Order: <http://www.ps.bam.de>

Version 2.0, io=1.0; iORS; oORS; CIE LAB

BAM registration: 20031201-FE87/Q87E00F1.PS/.TXT
Bottom part of page: application for monitors (Yr=2.5)

BAM material: code=th4ta

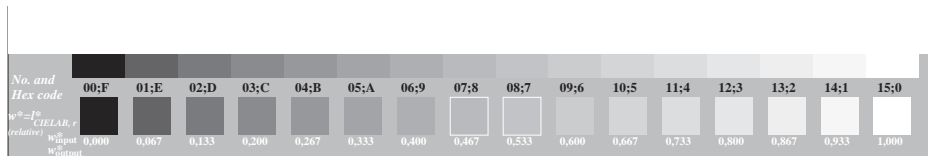

Picture C3: 16 visual equidistant L^* -grey steps; PS operator: $w^*_{lin} 1.0 \exp \text{ setgray}$; use file www.bam.de/EE87/10Q/Q87E00FA.PS or [/Q87E00FP.PS](http://www.bam.de/EE87/10Q/Q87E00FP.PS) for DPS or PDF systems to complete the figure

ISO/IEC-test chart no. 3 according to

ISO/IEC 15775 and
DIS ISO/IEC 19839-X;

input: $w^*_{lin} 1.0 \exp \text{ setgray}$
output: $cmY0^* / 000n^* \text{ setcmykcolor}$