


See for similar files: <http://www.ps.bam.de/FE88/>  
Information and Order: <http://www.ps.bam.de> Version 2.0, io=2,2?

BAM registration: 20031201-FE88/10Q/Q88E00SP.PS/.PDF BAM material: code=rha4ta  
Bottom part of page: application for monitors (Yr=2.5) and printers

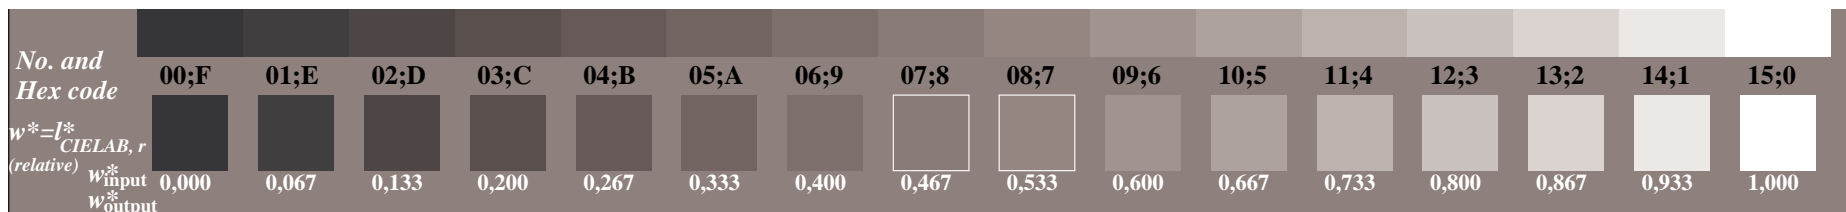

Picture C3: 16 visual equidistant  $L^*$ -grey steps; PS operator:  $nnn0^* setcmykcolor$ ; use file [www.bam.de/FE88/10Q/Q88E00SA.PS](http://www.bam.de/FE88/10Q/Q88E00SA.PS) or [/Q88E00SP.PS](http://www.bam.de/FE88/10Q/Q88E00SP.PS) for DPS or PDF systems to complete the figure

ISO/IEC-test chart no. 3 according to ISO/IEC 15775 and input:  $nnn0^* lin 1.0 exp setcmykcolor$   
DIS ISO/IEC 19839-X; output: *Startup (S) data dependend*