

www.ps.bam.de/FE88/O88E00F1.PS/.TXT; linearized output


F: Output Linearization (OL) data FE88/O88E00F1.DAT in File (F)

See for similar files: <http://www.ps.bam.de/FE88/>
Information and Order: <http://www.ps.bam.de>

Version 2.0, io=2.0; iORS; oORS; CIE LAB

BAM registration: 20031201-FE88/O88E00F1.PS/.TXT
Bottom part of page: application for monitors (YI=2.5) and printers

BAM material: code=th4ta

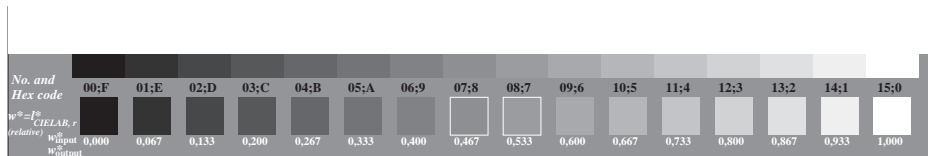

Picture C3: 16 visual equidistant L^* -grey steps; PS operator: *nnn0* setcmykcolor*; use file www.bam.de/FE88/100/O88E00FA.PS or [/O88E00FP.PS](http://www.bam.de/FE88/100/O88E00FP.PS) for DPS or PDF systems to complete the figure

ISO/IEC-test chart no. 3 according to

ISO/IEC 15775 and
DIS ISO/IEC 19839-X;

input: *nnn0*lin 1.0 exp setcmykcolor*
output: *cmy0* / 000n* setcmykcolor*