

www.ps.bam.de/FE89/O89E00F1.PS/.TXT; linearized output


F: Output Linearization (OL) data FE89/O89E00F1.DAT in File (F)

See for similar files: <http://www.ps.bam.de/FE89/>
Information and Order: <http://www.ps.bam.de>

Version 2.0, io=3,0; iORS; oORS; CIE LAB

BAM registration: 20031201-FE89/O89E00F1.PS/.TXT
Bottom part of page: application for monitors (Y1=2.5)

BAM material: code=th4ta

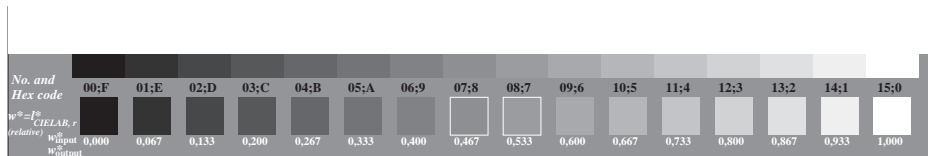

Picture C3: 16 visual equidistant L^* -grey steps; PS operator: `www* setrgbcolor`; use file www.bam.de/FE89/100-O89E00FA.PS or www.bam.de/FE89/100-O89E00FP.PS for DPS or PDF systems to complete the figure

ISO/IEC-test chart no. 3 according to

ISO/IEC 15775 and
DIS ISO/IEC 19839-X;

input: `www*lin 1.0 exp setrgbcolor`
output: `cmy0* / 000n* setcmykcolor`