

See for similar files: <http://www.ps.bam.de/FE95/FE95.HTM>
Information and Order: <http://www.ps.bam.de> Version 2.0, io=5,1; iORS; oORS, CIELAB

BAM registration: 20030101-FE95/100/O95E01FP.PS/.PDF BAM material: code=rha4ta
application for measurement of monitor ($Y_r=2.5$) and printer output

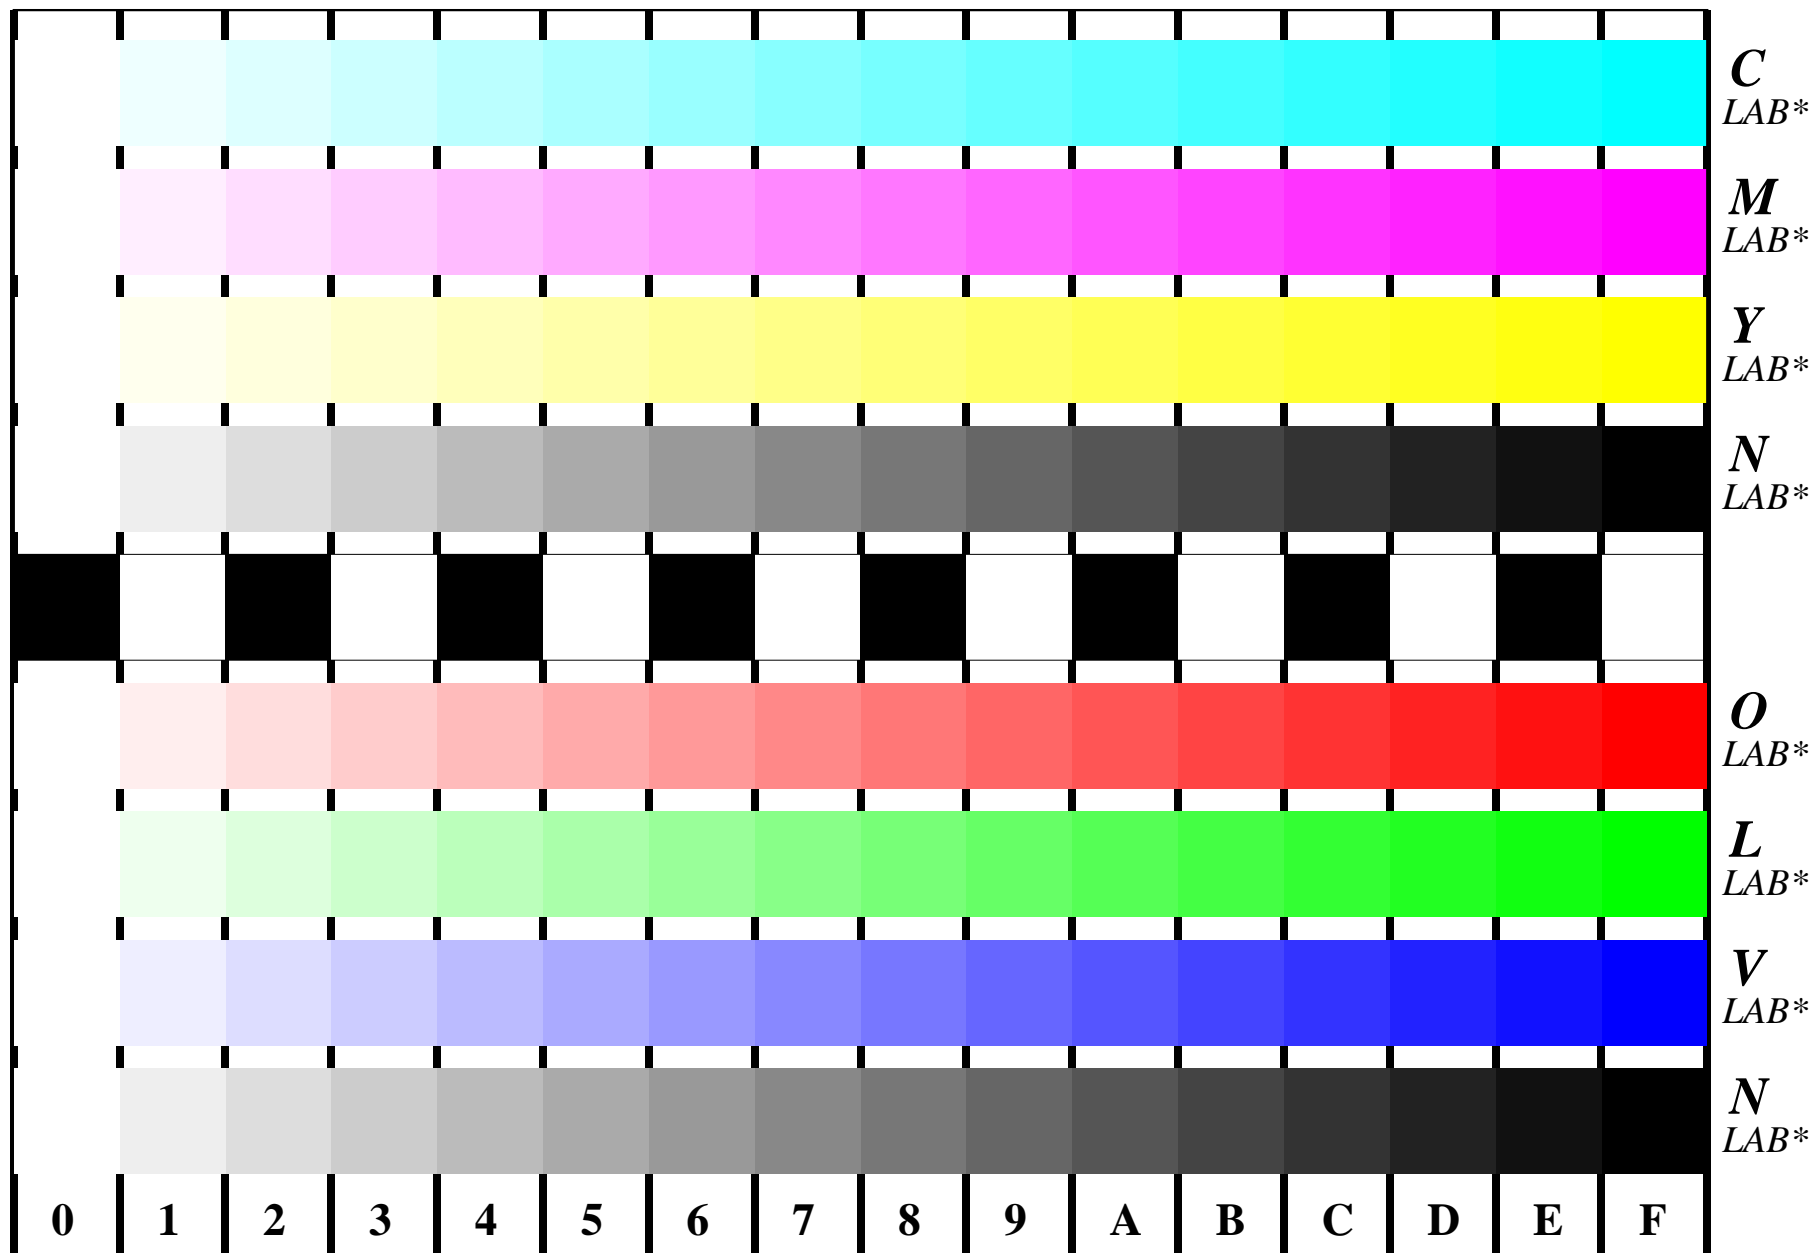


Figure B4 and D4 of the ISO/IEC-test charts no. 2 and 4; 16 visual equidistant steps of colour series; Use of the PS operator $LAB^*_{setcolor}$

Fig. B4 of ISO/IEC-test chart 2 and
Fig. D4 of ISO/IEC-test chart no. 4;

ISO/IEC 15775 and
TR ISO/IEC 24705;

input: $LAB^*_{setcolor}$
output: $olv^*_{setrgbcolor} / w^*_{setgray}$