


Technical informations: (e.g. Web-site)

Image-file version E1-1TS2199


Order information of production company (e.g. Web-site) for ISO test chart (e.g. code=rha4rd-I00)

ISO identification: 19990301-I01


ISO-reference material: code=rha4rd-I01

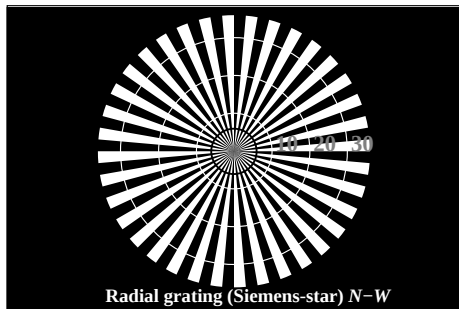


Radial grating (Siemens-star) N-W



Radial grating (Siemens-star) W-N

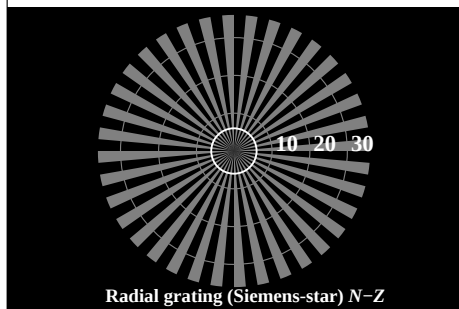


Radial grating (Siemens-star) N-Z




Radial grating (Siemens-star) W-Z

Picture A1: Radial gratings (Siemens-stars) N-W, W-N, N-Z, and W-Z

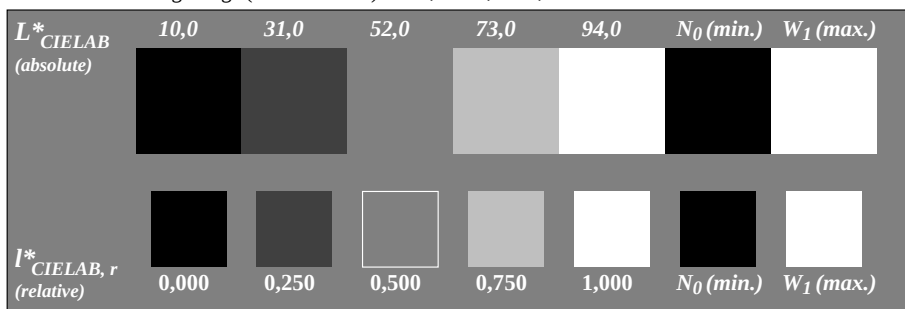


Picture A2: 5 visual equidistant L*-grey steps + N0 + W1

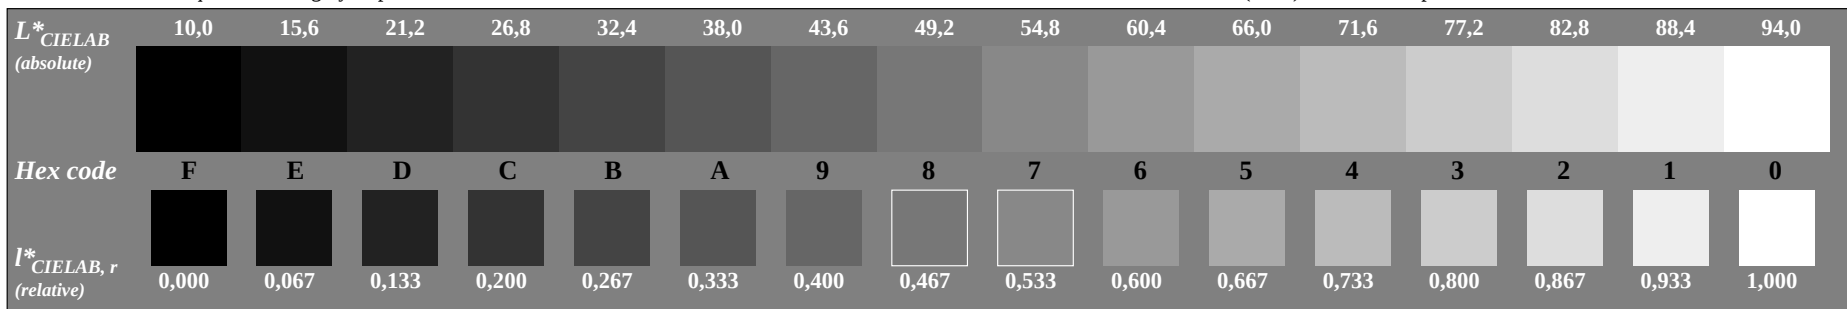


Picture A3: 16 visual equidistant L*-grey steps

Test chart no. 1 for color devices according to ISO 15775: compare www.actech.com.br/sc28

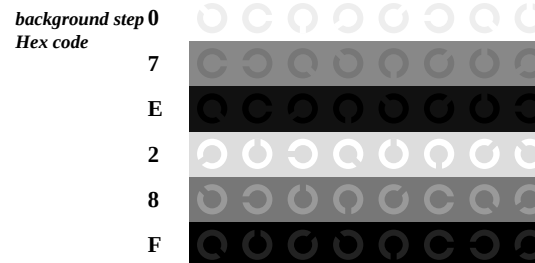

Landolt-rings W-N



code: background-ring

Picture A4: Landolt-rings W-N

	120	128	136	144	152	160	168	176	184	192	200	208	216	224	232	240	
120 (+8)																	240
60 (+4)																	120
30 (+2)																	60
15 (+1)																	30
	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	

line raster diameter in lpi

Picture A5: Line raster under 45° (or 135°); PS-/PDF-output different!

	120	128	136	144	152	160	168	176	184	192	200	208	216	224	232	240	
120 (+8)																	240
60 (+4)																	120
30 (+2)																	60
15 (+1)																	30
	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	

line raster diameter in lpi

Picture A6: Line raster under 90° (or 0°); PS-/PDF-output different!