




www.ps.bam.de/DE84/10B/B84E04NP.PS/.PDF; start output  
N: No Output Linearization (OL) data in File (F), Startup (S) or Device (D)

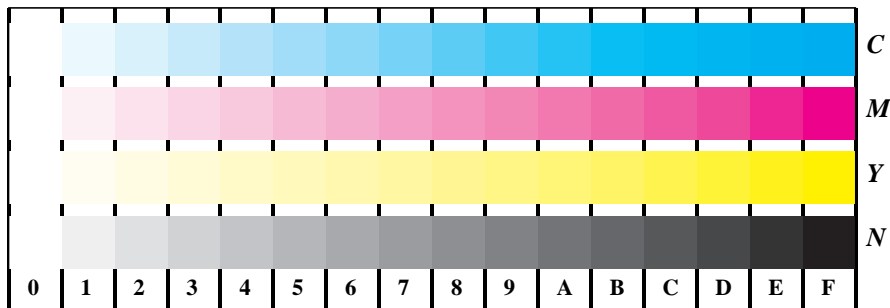


Picture B4: 16 equidistant steps W-C, W-M, W-Y and W-N; PS operator cmy0\*/000n\* setcmykcolor

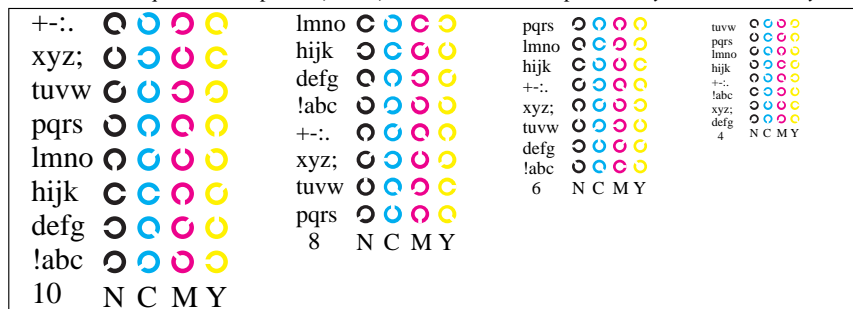


Picture B5: Script and Landolt-rings N, M, C and Y; Use of PS operator cmy0\*/000n\* setcmykcolor

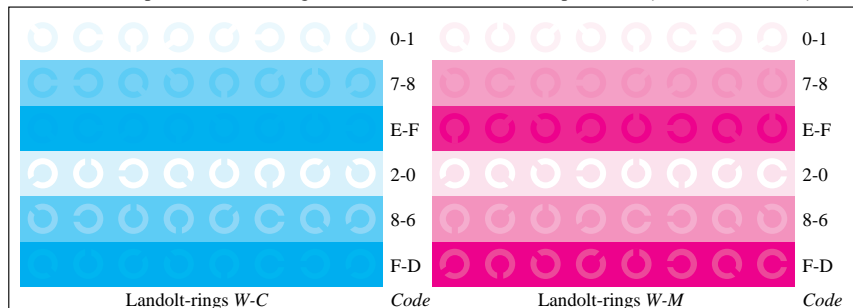


Picture B6: Landolt-rings W-C and W-M; Use of PS operator cmy0\*/000n\* setcmykcolor

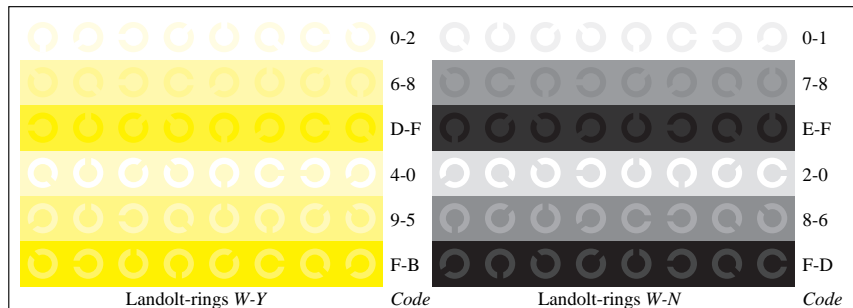


Picture B7: Landolt-rings W-Y and W-N; Use of PS operator cmy0\*/000n\* setcmykcolor

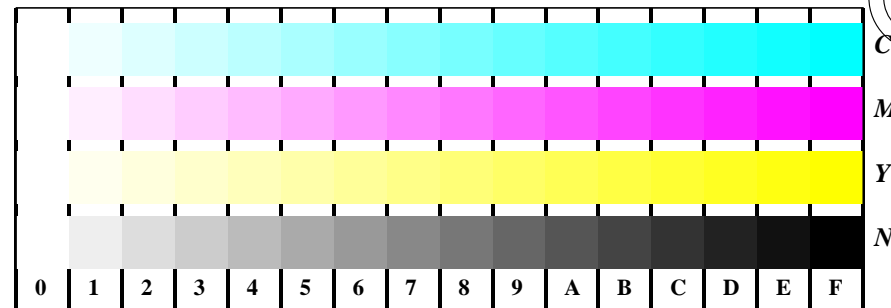


Picture B4: 16 equidistant steps W-C, W-M, W-Y and W-N; PS operator olv\* setrgbcolor / w\* setgray

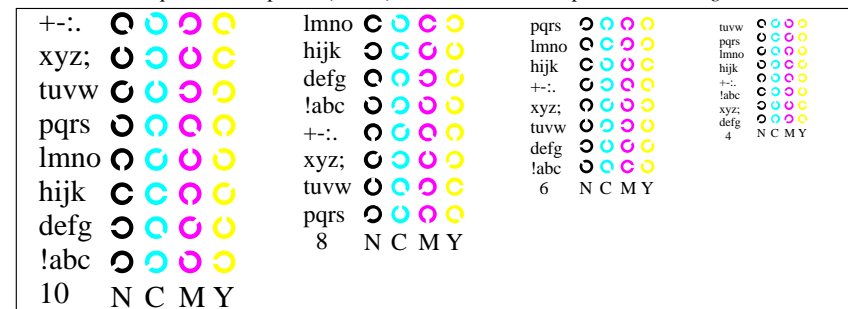

Picture B5: Script and Landolt-rings N, M, C and Y; Use of PS operator olv\* setrgbcolor / w\* setgray

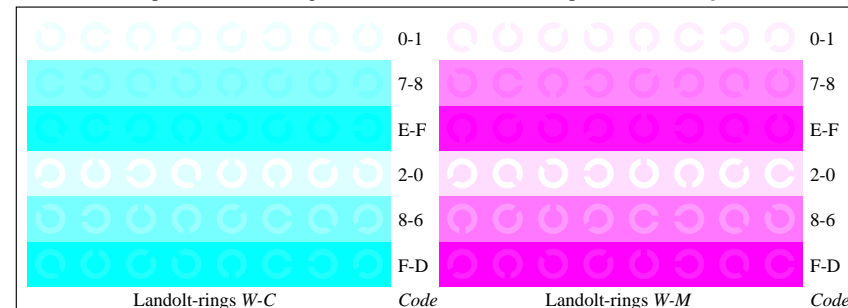

Picture B6: Landolt-rings W-C and W-M; Use of PS operator olv\* setrgbcolor / w\* setgray

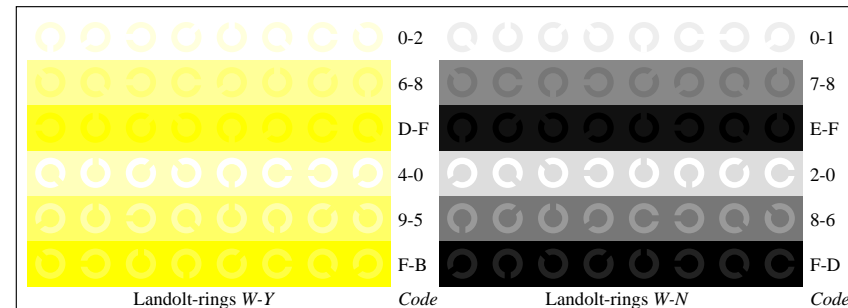

Picture B7: Landolt-rings W-Y and W-N; Use of PS operator olv\* setrgbcolor / w\* setgray

Fig. B4 to B7 of ISO/IEC-test chart 2;

ISO/IEC 15775 and input: mixture (m) of PS operators  
DIS ISO/IEC 19839-X; output: no change compared to input

BAM registration: 20030101-IE84/10B/B84E04NP.PS/.PDF  
application for monitors and printers, Yr=2.5, XYZ  
BAM material: code=rha4ta