



Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS oper.:  $\text{nnn0}^*\text{lin } 1.0 \exp \text{ setcmykcolor}$  Picture C5: Line raster under 45° (or 135°); PS operator:  $\text{nnn0}^*\text{lin } 1.0 \exp \text{ setcmykcolor}$

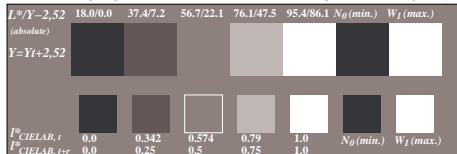


Picture C2: 5 visual equidistant  $L^*$ -gray steps +  $N_0$  +  $W_1$ ; PS operator:  $\text{nnn0}^*\text{lin } 1.0 \exp \text{ setcmykcolor}$

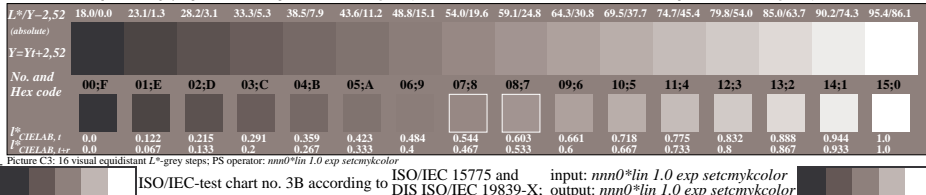


Picture C3: 16 visual equidistant  $L^*$ -gray steps; PS operator:  $\text{nnn0}^*\text{lin } 1.0 \exp \text{ setcmykcolor}$


ISO/IEC 15775 and DIS ISO/IEC 19839-X; input:  $\text{nnn0}^*\text{lin } 1.0 \exp \text{ setcmykcolor}$   
output:  $\text{nnn0}^*\text{lin } 1.0 \exp \text{ setcmykcolor}$

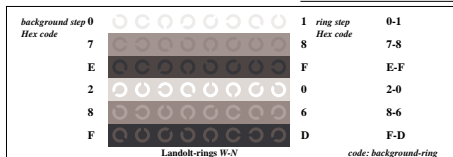

Picture C4: Landolt-rings W-N; PS operator:  $\text{nnn0}^*\text{lin } 1.0 \exp \text{ setcmykcolor}$

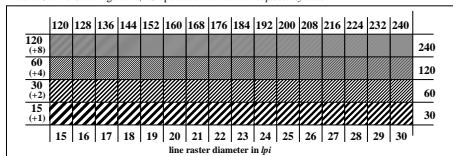

Picture C5: Line raster under 45° (or 135°); PS operator:  $\text{nnn0}^*\text{lin } 1.0 \exp \text{ setcmykcolor}$

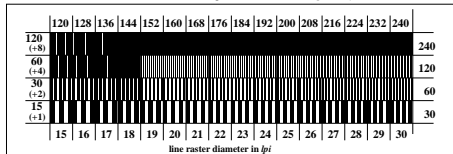

Picture C6: Line raster under 90° (or 0°); PS operator:  $\text{nnn0}^*\text{lin } 1.0 \exp \text{ setcmykcolor}$