



Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS oper.: $\text{nnn0}^*\text{lin } 1.0 \exp \text{ setcmykcolor}$ Picture C5: Line raster under 45° (or 135°); PS operator: $\text{nnn0}^*\text{lin } 1.0 \exp \text{ setcmykcolor}$

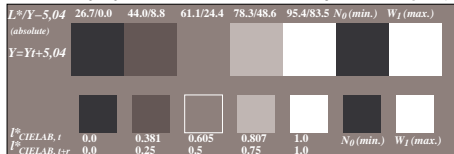


Picture C2: 5 visual equidistant L^* -grey steps + N_0 + W_1 ; PS operator: $\text{nnn0}^*\text{lin } 1.0 \exp \text{ setcmykcolor}$

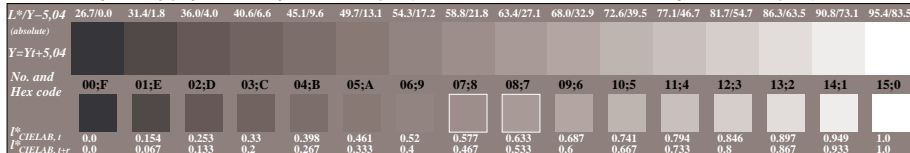


Picture C3: 16 visual equidistant L^* -grey steps; PS operator: $\text{nnn0}^*\text{lin } 1.0 \exp \text{ setcmykcolor}$




ISO/IEC-test chart no. 3C according to ISO/IEC 15775 and DIS ISO/IEC 19839-X; input: $\text{nnn0}^*\text{lin } 1.0 \exp \text{ setcmykcolor}$
output: $\text{nnn0}^*\text{lin } 1.0 \exp \text{ setcmykcolor}$

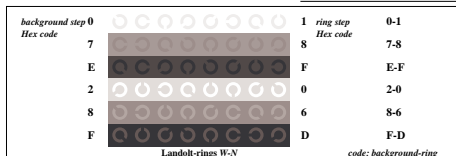

Picture C4: Landolt-rings W-N; PS operator: $\text{nnn0}^*\text{lin } 1.0 \exp \text{ setcmykcolor}$

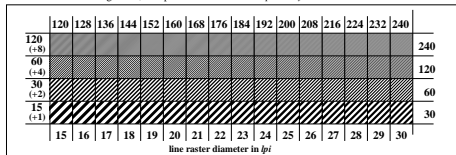

Picture C5: Line raster under 45° (or 135°); PS operator: $\text{nnn0}^*\text{lin } 1.0 \exp \text{ setcmykcolor}$

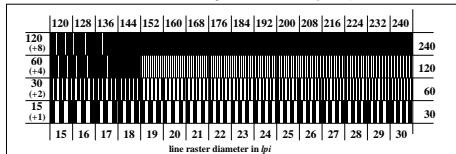

Picture C6: Line raster under 90° (or 0°); PS operator: $\text{nnn0}^*\text{lin } 1.0 \exp \text{ setcmykcolor}$