




Radial grating (Siemens-star) N-W



Radial grating (Siemens-star) W-N

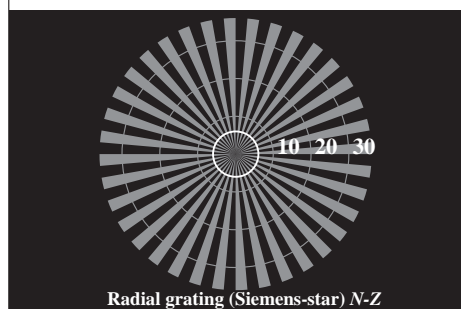


Radial grating (Siemens-star) N-Z



Radial grating (Siemens-star) W-Z

Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS oper.: `www*lin 1.0 exp setrgbcolor`

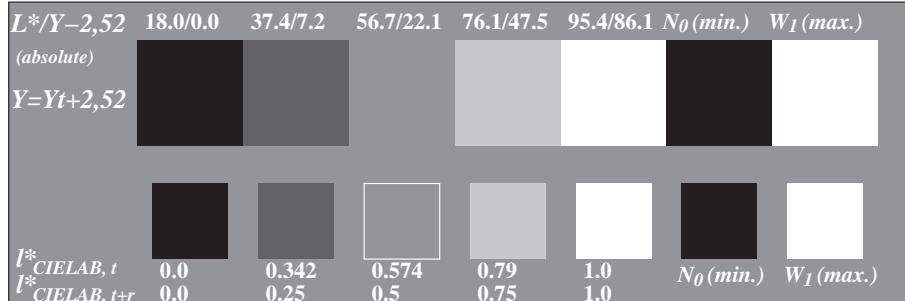

Picture C2: 5 visual equidistant L^* -grey steps + N_0 + W_I ; PS operator: `www*lin 1.0 exp setrgbcolor`



Picture C3: 16 visual equidistant L^* -grey steps; PS operator: `www*lin 1.0 exp setrgbcolor`; use file `www.bam.de/KE89/10B/B89E00FA.PS` or `/B89E00FP.PS/.PDF` for DPS or PDF systems to complete the figure

ISO/IEC-test chart no. 3B according to


ISO/IEC 15775 and input: `www*lin 1.0 exp setrgbcolor`
DIS ISO/IEC 19839-X; output: `cmy0* / 000n* setcmykcolor`

background step 0		1	ring step	0-1
Hex code		8	Hex code	7-8
7		F		E-F
E		0		2-0
2		6		8-6
8		D		F-D
F				

Landolt-rings W-N


code: background-ring

Picture C4: Landolt-rings W-N; PS operator: `www*lin 1.0 exp setrgbcolor`

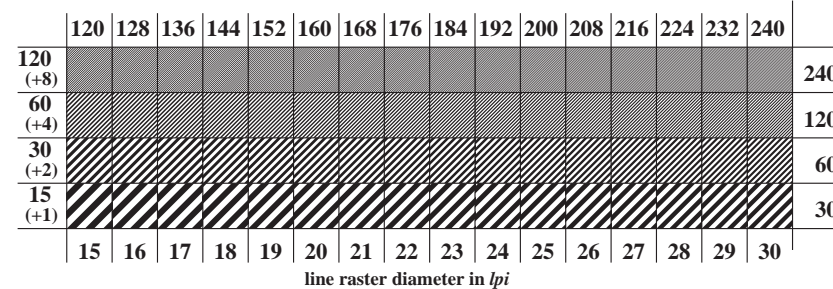

line raster diameter in lpi

Picture C5: Line raster under 45° (or 135°); PS operator: `www*lin 1.0 exp setrgbcolor`

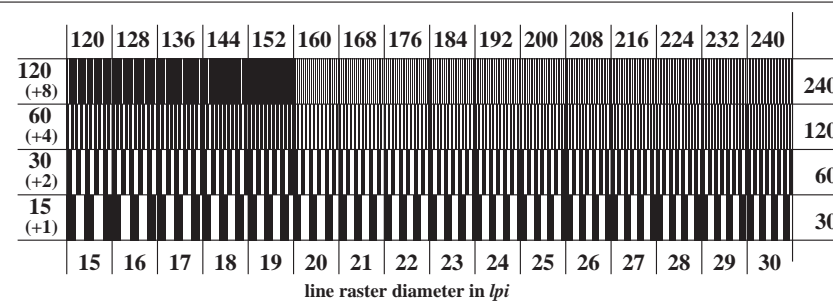

line raster diameter in lpi

Picture C6: Line raster under 90° (or 0°); PS operator: `www*lin 1.0 exp setrgbcolor`